

Life-Cycle Management Model for Tunnels

Škarič-palič, Sandra; Stipanović Oslaković, Irina; Kovačević, Meho Saša ; Gavin, Kenneth

DOI

[10.5592/CO/cetra.2018.913](https://doi.org/10.5592/CO/cetra.2018.913)

Publication date

2018

Document Version

Final published version

Published in

Road and Rail Infrastructure V: Proceedings of the 5th International Conference on Road and Rail Infrastructure (CETRA)

Citation (APA)

Škarič-palič, S., Stipanović Oslaković, I., Kovačević, M. S., & Gavin, K. (2018). Life-Cycle Management Model for Tunnels. In *Road and Rail Infrastructure V: Proceedings of the 5th International Conference on Road and Rail Infrastructure (CETRA): 17-19 May 2018, Zadar, Croatia* (pp. 1525-1540). University of Zagreb. <https://doi.org/10.5592/CO/cetra.2018.913>

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.



CETRA 2018

5th International Conference on Road and Rail Infrastructure
17–19 May 2018, Zadar, Croatia

Road and Rail Infrastructure V

Stjepan Lakušić – EDITOR



Organizer
University of Zagreb
Faculty of Civil Engineering
Department of Transportation



CETRA²⁰¹⁸

5th International Conference on Road and Rail Infrastructure

17–19 May 2018, Zadar, Croatia

TITLE

Road and Rail Infrastructure V, Proceedings of the Conference CETRA 2018

EDITED BY

Stjepan Lakušić

ISSN

1848-9850

ISBN

978-953-8168-25-3

DOI

10.5592/CO/CETRA.2018

PUBLISHED BY

Department of Transportation

Faculty of Civil Engineering

University of Zagreb

Kačićeva 26, 10000 Zagreb, Croatia

DESIGN, LAYOUT & COVER PAGE

minimum d.o.o.

Marko Uremović · Matej Korlaet

PRINTED IN ZAGREB, CROATIA BY

“Tiskara Zelina”, May 2018

COPIES

500

Zagreb, May 2018.

Although all care was taken to ensure the integrity and quality of the publication and the information herein, no responsibility is assumed by the publisher, the editor and authors for any damages to property or persons as a result of operation or use of this publication or use the information's, instructions or ideas contained in the material herein.

The papers published in the Proceedings express the opinion of the authors, who also are responsible for their content. Reproduction or transmission of full papers is allowed only with written permission of the Publisher. Short parts may be reproduced only with proper quotation of the source.

Proceedings of the
5th International Conference on Road and Rail Infrastructures – CETRA 2018
17–19 May 2018, Zadar, Croatia

Road and Rail Infrastructure V

EDITOR

Stjepan Lakušić
Department of Transportation
Faculty of Civil Engineering
University of Zagreb
Zagreb, Croatia

ORGANISATION

CHAIRMEN

Prof. Stjepan Lakušić, University of Zagreb, Faculty of Civil Engineering
Prof. emer. Željko Korlaet, University of Zagreb, Faculty of Civil Engineering

ORGANIZING COMMITTEE


Prof. Stjepan Lakušić
Prof. emer. Željko Korlaet
Prof. Vesna Dragčević
Prof. Tatjana Rukavina
Assist. Prof. Ivica Stančerić
Assist. Prof. Maja Ahac
Assist. Prof. Saša Ahac
Assist. Prof. Ivo Haladin
Assist. Prof. Josipa Domitrović
Tamara Džambas
Viktorija Grgić
Šime Bezina
Katarina Vranešić
Željko Stepan

Prof. Rudolf Eger
Prof. Kenneth Gavin
Prof. Janusz Madejski
Prof. Nencho Nenov
Prof. Andrei Petriaev
Prof. Otto Plašek
Assist. Prof. Andreas Schoebel
Prof. Adam Szeląg
Brendan Halleman

INTERNATIONAL ACADEMIC SCIENTIFIC COMMITTEE

Stjepan Lakušić, University of Zagreb, president
Borna Abramović, University of Zagreb
Maja Ahac, University of Zagreb
Saša Ahac, University of Zagreb
Darko Babić, University of Zagreb
Danijela Barić, University of Zagreb
Davor Brčić, University of Zagreb
Domagoj Damjanović, University of Zagreb
Sanja Dimter, J. J. Strossmayer University of Osijek
Aleksandra Deluka Tibljaš, University of Rijeka
Josipa Domitrović, University of Zagreb
Vesna Dragčević, University of Zagreb
Rudolf Eger, RheinMain Univ. of App. Sciences, Wiesbaden
Adelino Ferreira, University of Coimbra
Makoto Fujii, Kanazawa University
Laszlo Gaspar, Széchenyi István University in Győr
Kenneth Gavin, Delft University of Technology
Nenad Gucunski, Rutgers University
Ivo Haladin, University of Zagreb
Staša Jovanović, University of Novi Sad
Lajos Kisgyörgy, Budapest Univ. of Tech. and Economics

Anastasia Konon, St. Petersburg State Transport Univ.
Željko Korlaet, University of Zagreb
Meho Saša Kovačević, University of Zagreb
Zoran Krakutovski, Ss. Cyril and Methodius Univ. in Skopje
Dirk Lauwers, Ghent University
Janusz Madejski, Silesian University of Technology
Goran Mladenović, University of Belgrade
Tomislav Josip Mlinarić, University of Zagreb
Nencho Nenov, University of Transport in Sofia
Mladen Nikšić, University of Zagreb
Andrei Petriaev, St. Petersburg State Transport University
Otto Plašek, Brno University of Technology
Mauricio Pradena, University of Concepcion
Carmen Racanel, Tech. Univ. of Civil Eng. Bucharest
Tatjana Rukavina, University of Zagreb
Andreas Schoebel, Vienna University of Technology
Ivica Stančerić, University of Zagreb
Adam Szeląg, Warsaw University of Technology
Marjan Tušar, National Institute of Chemistry, Ljubljana
Audrius Vaitkus, Vilnius Gediminas Technical University
Andrei Zaitsev, Russian University of transport, Moscow



LIFE CYCLE MANAGEMENT MODEL FOR TUNNELS

Sandra Škaric Palić¹, Irina Stipanović^{1,2}, Meho Saša Kovačević³, Kenneth Gavin⁴

¹ *Infra Plan consulting, Croatia*

² *University of Twente, Faculty of Engineering Technology, Netherlands*

³ *University of Zagreb, Faculty of Civil Engineering, Croatia*

⁴ *Delft University of Technology, Faculty of Civil Engineering and Geosciences, Netherlands*

Abstract

Tunnels are a vital link in transport networks which represent a significant investment in all life cycle phases from planning, investigation works, construction and operation. Decisions through the whole life cycle of a tunnel should be based on solid facts and reliable data especially in the context of considerable impacts on both the environment and society. The calculation of total life time costs for different design alternatives, maintenance options and societal impacts can be used to compare different technical solutions and select the optimal design and maintenance alternative. Generally problems related to tunnel degradation can be divided into those caused by external pressure and those caused by the deterioration of materials. These problems are gradually increased through all life cycle stages of a concrete structure such as a tunnel, therefore decisions about the timing and the type of maintenance should be based on degradation prediction models and monitoring of the structure performance or degradation processes. Uncertainties in the decision making process can be decreased by using information from monitoring which are used to establish triggering thresholds for the structure passing certain performance levels. In this paper the use of monitored tunnel deformations in a life cycle management model for a tunnel is presented. The monitoring data gives information about tunnel long term deformations that are used in the decision making process, in order to prevent occurrence of tunnel damage and consequently large maintenance costs.

Keywords: tunnels, maintenance, life cycle management model, decision making

1 Introduction

Tunnels, are vital part of many transport infrastructure networks, and represent a significant financial investment with a very high influence on both environment and society. This type of structure is designed and built for a very long life cycle of which a major part is the operational phase with all related maintenance activities. Inadequate and untimely planning of maintenance and repair activities can cause immense costs, both financial and environmental. Ageing is a general ubiquitous process but deterioration mechanisms and environmental impacts are different regarding type of structure. At present day there are millions of civil engineering and building structures, where design service life is usually defined in the range of 70 – 120 years. [1, 2] The required service life of a structure, especially as one as important as a tunnel, can often be much longer than it was initially designed for. But severe structural defects that often occur in the service life can highly increase the overall life time cost.

2 Problems related to tunnels

When it comes to underground structures there are specific problems regarding the environmental influences on the structure and external loads which are very much dependant on the surrounding soil or rock mass. The primary phase of the actual construction process of a tunnel is excavation which leads to stress redistribution and changes in soil stiffness. This eventually leads to short-term and long-term deformations that can cause local cracks or micro cracks on the concrete lining surface, [1]. Figure 1 shows some problems appearing in tunnels such as cracks and leaking through tunnel lining.



Figure 1 Heavy leaking through tunnel lining and water on the pavement as a consequence influencing traffic safety; cracks on tunnel ceiling [4]

Generally the causes of deterioration of tunnel lining can be broadly classified into two types, (1) those caused by external pressure, including earth pressure and freezing pressure; and (2) those caused by the deterioration of materials such as the concrete lining, [3]. The implementation of long term monitoring systems, which measure tunnel performance, will decrease the uncertainties included in the life cycle tunnel management decision making processes.

3 Life cycle management

Whole-life costing (WLC) is “the methodology for systematic economic consideration of all whole life costs and benefits over the period of analysis” as defined in the international standard for life cycle costing of buildings and constructed assets [5]. Analysis of the whole life costing is aimed for improving decision making process and does not necessarily mean choosing the longest service life or the minimum costs but rather choosing an optimal solution based on reliable data.

3.1 Life cycle stages

There are a number of phases in the development and use of an asset. Typically the sequence of events through the life of the asset progresses as follows:

- Concept phase – where the owner’s basic requirements and needs are established.
- Design – usually involving preliminary and detailed design phases.
- Construction – the process whereby the asset is built.
- Operation and use – through life performance and maintenance of its functionality.
- Disposal – the process by which the asset is either sold, decommissioned or removed.

Figure 2 shows the different phases in the service life of a concrete structure. It incorporates the periods of design and construction, post-construction service life, the remedial intervention process and also post-intervention performance. It shows the general steps and activities

involved. Some parameters and other aspects which influence the potential durability and service-life of the structure are listed. Such parameters might provide a basis for modelling the performance of the structure and for developing better acceptance and performance criteria which might be utilised by the owner for through-life management of the structure, [6].

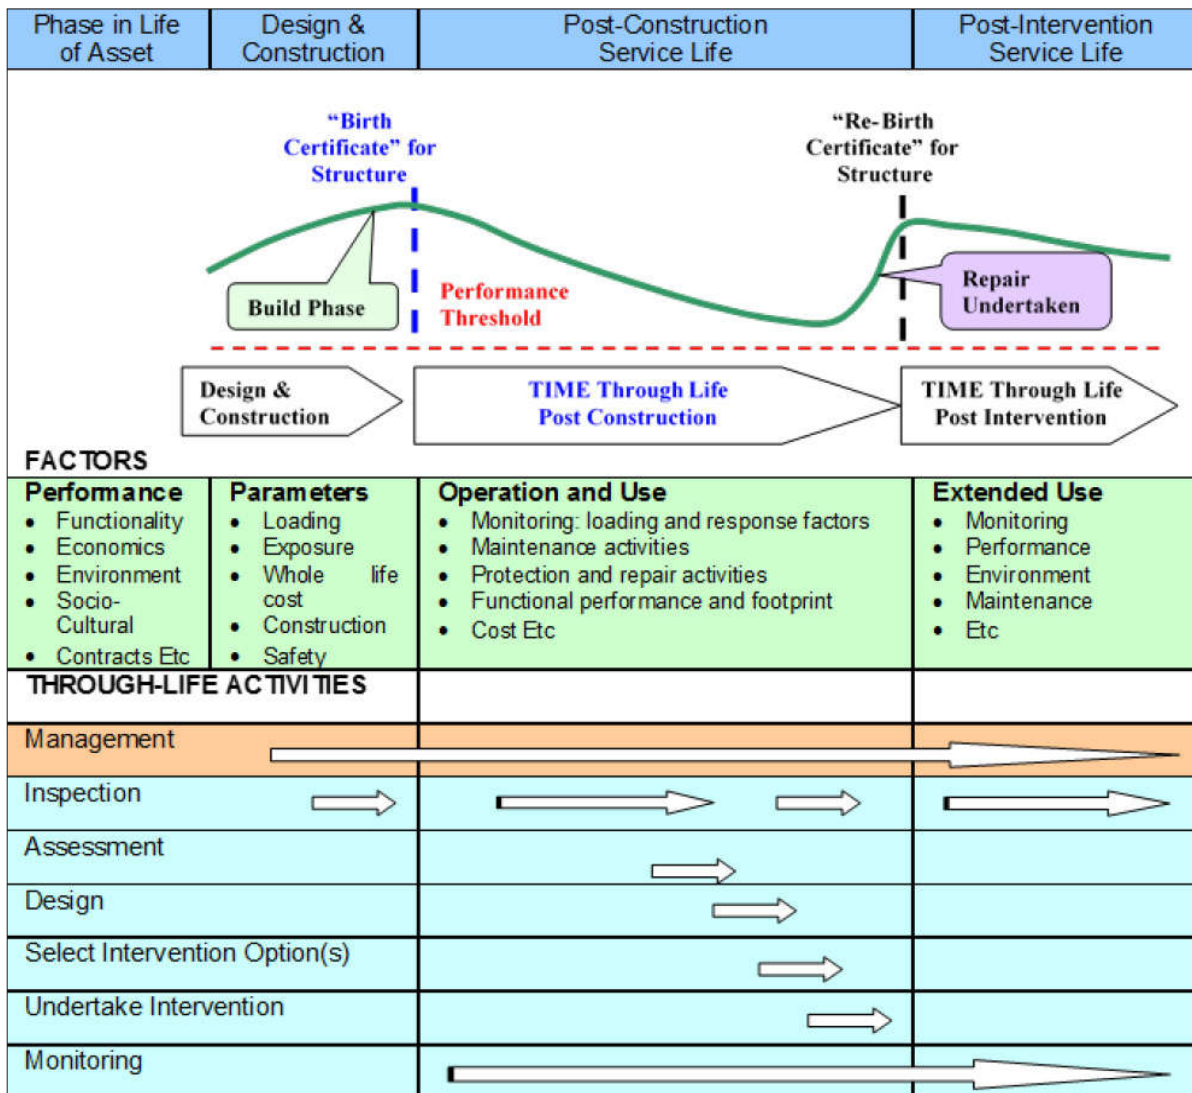


Figure 2 Through-life processes and management of concrete structure [6]

3.2 Tunnels performance modelling and monitoring

When performing any life cycle cost analysis it is necessary to establish a deterioration curve to predict a structure, system or a part of a system passing from one condition state to another. It can be applied for both new and existing structures and considers explicitly the impact of maintenance interventions. First it needs to be determined which are the dominant deterioration mechanisms for the tunnel and the influence the tunnel structural performance as well as the quantifying the geological and hydrogeological conditions.

There are both deterministic and probabilistic models available which can be used to simulate the structural degradation. Since the parameters associated with underground structures such as tunnels are associated with large uncertainty it is recommended in the literature [7] to use probabilistic models combined with measurement data for simulating the degradation of structures subjected to gradual deterioration.

According to [8] a review of the published literature suggests that there are several uncertainties associated failure assessments of tunnel structures that require further research: (i) the stochastic formulation of time-dependent performance functions in tunnel structures has not been fully developed in the previous studies; (ii) time-dependent reliability assessment of tunnel structure, which leads to prediction of remaining lifetime, has not been fully implemented; (iii) in the few reliability-based studies only one failure mode has been considered. But often in practice when it comes to decision making a simple analysis based on expert judgment of experienced engineers is used for the purpose of determining the transition into a lower condition level.

3.3 Monitoring of tunnel long term deformations

Tunnels are not as accessible for inspections as some other types of structures. Although the inside face of the primary lining of a tunnel is directly visible the secondary lining, rock or soil behind it (possibly strengthened) and bonds between all layers cannot be examined visually. Non-intrusive methods (e.g. ground penetrating radar) require interpretations whilst intrusive techniques can compromise the structural integrity. Long-term monitoring provides a viable alternative with which to reduce uncertainties regarding processes of condition assessment and can be used for calibration of existing numerical models.

Long-term deformations can occur over large periods (tens of years resulting from various time dependent processes such as creep, squeezing, swelling, and consolidation of soils. In addition stress redistribution between the primary and secondary lining, creep or degradation of the structural materials can occur, [9]. These deformations can cause local cracks or micro cracks on the concrete surface.

3.4 Life cycle management model for tunnels

A large part of the total cost over whole life of a tunnel are incurred after construction in the operational phase and can highly overcome the initial construction cost of a structure. Choices made regarding different alternatives of initial design for a new asset or maintenance activities for existing assets can result in a very different life-time service cost.

The investigation and assessment processes need to give owners an understanding of the urgency of any interventions required upon the structure, whether this is essential for its structural functionality and the influence such issues may have upon the management of the structure, as well as the choices available amongst the potential options for discharging the owner's specific and wider responsibilities, [6].

Figure 3 shows two types of maintenance approaches in infrastructure management decision practice. Reactive or corrective maintenance imply actions after a fault or a failure already occurs and it relies on data collected mainly through inspections. Proactive or preventive and predictive maintenance is based on probability theory [2] and is based on the economic assumption that it is better to invest now, to prevent structure damage or its advancement, to save money later. Life cycle cost analysis is used to assess these costs through a certain period or whole life of a structure.

Although sudden failures of tunnels do occur rarely they do not present a dominant way of these structures reach their ultimate limit state and eventually end of life. Deterioration of a tunnel is a gradual process through the life of a structure in which routine maintenance and repair actions are performed. While routine maintenance does not improve quality level of a structure but rather keeps it on an operational level repair/remediation works are intended to increase structure performance level. Figure 4 shows how a standard gradual deterioration curve of an ageing structure can be combined with monitoring data to establish threshold values which can then be used for determination of optimal timing for certain measures.

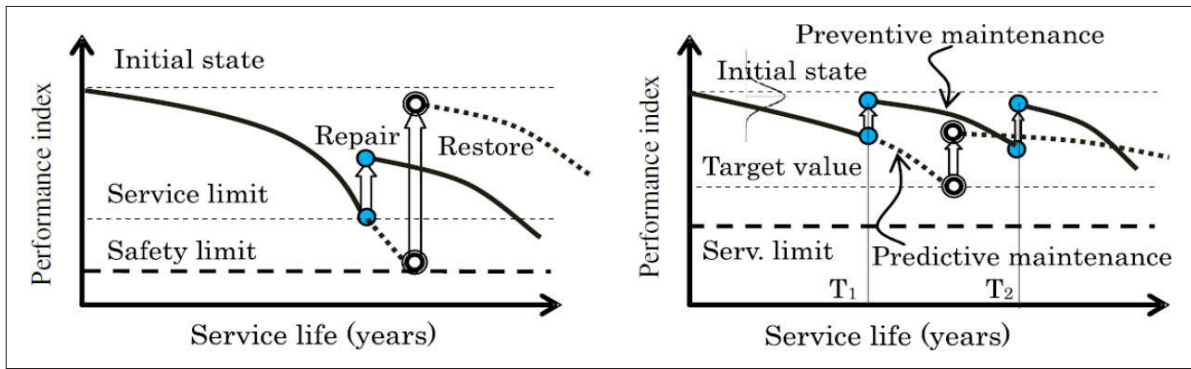


Figure 3 Two types of maintenance philosophies (a) corrective maintenance and (b) preventive and predictive maintenance [2]

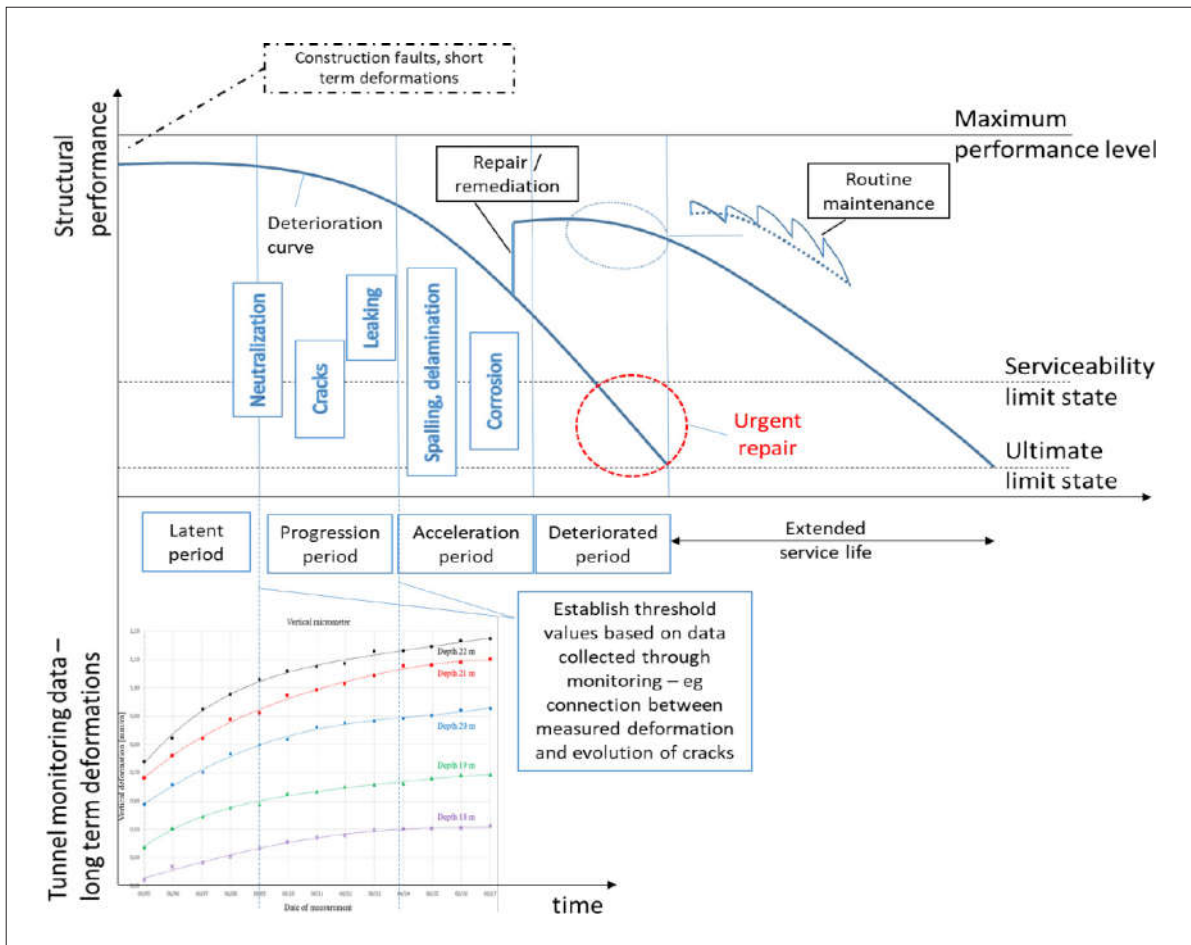


Figure 4 Life cycle of a structure combined with tunnel monitoring data

The Faculty of Civil Engineering in Zagreb installed extensive geotechnical instrumentation in the Bobova tunnel which was constructed in 2005. It is located on the D404 state highway and passes under a part of the Vežica – Sušak town area in Rijeka. Measurements were carried out during excavation works and over the 12 years of operation. The deformation measurements shown in Figure 4, indicate that the largest movements occurred during excavation, however, displacements have continued to the present day, albeit at a continuously reduced rate. The monitoring results are to be used to test a methodology for estimating rheological parameters for the prediction of long-term deformations using monitoring data for Croatian karst. In this paper monitoring results are suggested to be used in the development of life cycle management model for tunnels as shown in Figure 4.

Figure 4 combines a theoretical gradual deterioration curve of structural performance and ageing. In the first period before neutralization it is easy to maintain a structures performance with routine maintenance. Once progression period begins inclination of deterioration curve is increased and maintaining structures performance requires more costs. Establishing the deterioration curve can help decision makers in choosing optimal time for repair works before structural performance reaches a certain level where costs significantly increase. The curve is valid while there are constant conditions and does not present environmental changes such as floods or earthquakes. Long term monitoring of deformations can be used for determination of the phase in which structure is which is what triggers decisions regarding maintenance or repair activities.

4 Conclusion

This research is the beginning of the optimisation of maintenance strategies by decreasing uncertainties in the analysis of life cycle of a tunnel structure. Monitoring data can be used to establish probabilistic deterioration relationships to determine future costs. Future steps are needed to bring together data about defects and timing of defects with the data about long term deformations collected through monitoring.

References

- [1] Vaníček, I., Vaníček, M., Záleský, J.: Monitoring of tunnel lining deformation and deterioration, Proceedings of the 17th International Conference on Soil Mechanics and Geotechnical Engineering 2009, pp. 111-2116
- [2] Wang, J., Koizumi, A., Tanaka, H.: 'Framework for maintenance management of shield tunnel using structural performance and life cycle cost as indicators', Structure and infrastructure engineering, 2017, Vol.13, No.1, 44-54
- [3] Usman, M., Galler, R.: 'Long-term deterioration of lining in tunnels', International Journal of Rock Mechanics & Mining Sciences 64 (2013) 84–89
- [4] 'Technical solution for repair of tunnel lining in tunnel Veliki Glozac, direction Rijeka, highway Rijeka-Zagreb', Institute IGH, 2320-1335/14, 2014.
- [5] ISO 15686-5:2008 Buildings and constructed assets -- Service-life planning -- Part 5: Life-cycle costing
- [6] fib Guide to Good Practice, Concrete Structure Management – The Owners' Guide to Good Practice, Report from Task Group 5.3 'Assessment, maintenance and remediation', 2006
- [7] Ai, Q., Yuan, Y., Mahadevan, S., Jiang, X.: Maintenance strategies optimisation of metro tunnels in soft soil, Structure and Infrastructure Engineering, 13 (2017) 8, pp. 1093-1103, DOI: 10.1080/15732479.2016.1243564
- [8] Yang, W., Baji H., Chun-Qing Li , C.-Q.: Time-dependent reliability method for service life prediction of reinforced concrete shield metro tunnels, Structure and Infrastructure Engineering, DOI: 10.1080/15732479.2017.1401094
- [9] Kovačević, M.S., Gavin, K., Stipanović Oslaković, I., Librić, L., Rossi, N.: 'Monitoring of long term deformations in Bobova tunnel', CETRA 2018, accepted for publishing.
- [10] Sandron, F., Labiouse, V.: Identification and analysis of Swiss National Road tunnels pathologies, Rock Mechanics Laboratory LMR, Ecole Polytechnique Federale de Lausanne EPFL, Switzerland, 2010.