

Monitoring Co₂ Injection into Basaltic Reservoir Formations at the Hellisheiði Geothermal Site in Iceland: Laboratory Experiments

Janssen, M.T.G.; Draganov, D.S.; Bos, Jordan; Farina, B.; Barnhoorn, A.; Poletto, F.; Van Otten, G.; Wolf, K.H.A.A.; Durucan, S.

DOI

[10.3997/2214-4609.202210474](https://doi.org/10.3997/2214-4609.202210474)

Publication date

2022

Document Version

Final published version

Published in

EAGE Annual Conference & Exhibition 2022

Citation (APA)

Janssen, M. T. G., Draganov, D. S., Bos, J., Farina, B., Barnhoorn, A., Poletto, F., Van Otten, G., Wolf, K. H. A. A., & Durucan, S. (2022). Monitoring Co₂ Injection into Basaltic Reservoir Formations at the Hellisheiði Geothermal Site in Iceland: Laboratory Experiments. In *EAGE Annual Conference & Exhibition 2022* (pp. 1-5). European Association of Geoscientists & Engineers. <https://doi.org/10.3997/2214-4609.202210474>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

MONITORING CO₂ INJECTION INTO BASALTIC RESERVOIR FORMATIONS AT THE HELLISHEIÐI GEOTHERMAL SITE IN ICELAND: LABORATORY EXPERIMENTS.

M. Janssen¹, D. Draganov¹, J. Bos², B. Farina³, A. Barnhoorn¹, F. Poletto³, G. Van Otten², K. Wolf¹, S. Durucan⁴

¹ Delft University Of Technology; ² Seismic Mechatronics; ³ Istituto Nazionale di Oceanografia e di Geofisica Sperimentale - OGS; ⁴ Imperial College London

Summary

In the ACT Consortium funded project SUCCEED, researchers study the potential for monitoring the process of (re-)injecting produced and captured CO₂ into the Hellisheiði geothermal field for the aid of enhancing geothermal deployment as well as permanently storing CO₂ through mineralization. The Hellisheiði site provides an excellent opportunity for demonstrating an innovative seismic monitoring technique. Prior to conducting an active-source monitoring survey, we perform acoustic transmission measurements, on Hellisheiði rock samples, at field-representative stress conditions to obtain the seismic-response characteristics of all present formations. Subsequently, we use the acquired velocity data as an input for simulating 2D seismic surveys using a subsurface model representing the Hellisheiði site. Results show that the impact of increasing depth, i.e., stress, on seismic velocities is most apparent for the porous basalt layers due to their relatively large portion of open pore space, allowing for substantial compaction, increasing their bulk density and thus velocity. The poorly-consolidated hyaloclastites reveal a negligible effect of increasing depth on their velocity as the material already reached its maximum compaction at low stresses, thus at shallow depths. Comparison of synthetic and field geophone data reveal that the velocity profiles have to be updated for the shallow depths in the model.

Monitoring CO₂ Injection into Basaltic Reservoir Formations at the Hellisheiði Geothermal Site in Iceland: Laboratory Experiments.

Introduction

Though it is commonly assumed that geothermal energy is a clean and renewable form of energy, the majority of the geothermal power stations do emit carbon dioxide (CO₂), and other greenhouse gases, as part of the produced geothermal fluid (Bayer et al. 2013; Bravi and Basosi, 2014; O’Sullivan et al. 2021). However, as shown by a report published by World Bank in 2016, CO₂ emissions related to geothermal power generation sites are, on average, relatively small compared to traditional coal and gas fired plants (Fridriksson et al. 2016). Nevertheless, CO₂ releases due to geothermal energy production can be quite significant in some areas like in Italy (Bravi and Basosi, 2014), Turkey (Bayer et al. 2013), and in Iceland (Ármansson, 2018). For example, the Hellisheiði co-generation power plant in Iceland, commissioned in 2006, has a 303 MWe electrical production capacity and a 133 MWth thermal capacity. The latter resulting in the production of 417,000 tonnes of CO₂ and approximately 114,000 tonnes of H₂S from the basaltic reservoir formation over its entire production history (Sigfússon et al. 2018), equivalent to average annual emissions of 41,000 and 10,000 tonnes for CO₂ and H₂S, respectively (Gunnarsson et al. 2018).

With our work, we aim to study and validate the feasibility of monitoring the (re-)injection of produced, and captured from the atmosphere, CO₂ (at the Hellisheiði geothermal plant in Iceland) into the geothermal field for pressure maintenance, i.e., enhancing geothermal production, whilst permanently storing the CO₂ through mineralization. This provides a state-of-the-art, cost-effective, and low-environmental impact coupled geothermal-CO₂ storage monitoring technique. At first the CO₂, that got released as a by-product of geothermal energy production, is captured in water, yielding acidic gas-charged re-injection water (Gislason and Oelkers, 2014; Clark et al. 2020). During its re-injection into the basaltic reservoir formation, the acidic water accelerates the dissolution process of the basalts, resulting in the release of divalent cations, i.e., Ca²⁺, Mg²⁺, and Fe²⁺, to the injected aqueous phase. Subsequently, the dissolved CO₂ is now able to react with the freshly added cations, yielding the formation of stable carbonate minerals (Power et al. 2013; Gislason and Oelkers, 2014; Clark et al. 2020). For permanently storing CO₂ inside the Earth’s subsurface, carbon mineralization is seen as the safest storage technique (Gislason and Oelkers, 2014; Clark et al. 2020). The aforementioned (re-)injection strategy has been practised at the Hellisheiði site since 2014. Mass balance calculations performed since then show that bulk of the injected CO₂ was mineralized within a time frame of a few months to a year after injection was initiated (Gunnarsson et al. 2018; Clark et al. 2020). The Hellisheiði site provides a perfect opportunity for demonstrating innovative seismic monitoring techniques using a distributed fibre-optic acoustic sensing system (iDAS) in combination with an electric linear synchronous motor (LSM) seismic vibrator (e-vib). The LSM-based seismic vibrator consists of a 673 kg reaction mass, 265 kg baseplate, maximum driving force 10 kN, and dimensions of 950×1440×1170 mm. Sweeps starting from 2 Hz can be generated. The novel e-vib can be used for generating both compressional and shear waves.

In this work, we combine various scientific methods including laboratory experiments, numerical 2D seismic modelling, and fieldwork for i) collecting reference rock samples, or analogous, of the Hellisheiði geothermal reservoir and ii) seismic monitoring of CO₂ injection. We perform laboratory active-source transmission measurements at field-representative stress conditions on rock samples to obtain the seismic-response characteristics of all formations present at Hellisheiði. Subsequently, we use the acquired seismic velocity data as an input for simulating 2D seismic surveys using a subsurface model representing the project site. The simulation results are then used for defining the field acquisition geometry, but are also used to aid the interpretation of the seismic monitoring survey results. Where in this study we mainly focus on laboratory experiments, in our other contribution to this Conference (Meneghini et al. 2022) we discuss the preliminary results from the multi-tool active-source seismic acquisition. This work is closely related to our previous work where we assessed the velocity characterisation of geothermal reservoir rocks of the Kızıldere geothermal field in Turkey (Janssen et al. 2021).

Methods and Materials

Figure 1 presents an overview of the workflow we use in our study. We sourced several rock samples from various fresh outcrops in the area around the Hellisheiði geothermal site. These included hyaloclastites, dikes/intrusions, and basalts with varying porosities (ranging from 22 to 47%, reflecting different depths within the subsurface where the magma cooled off). After coring the collected samples, we determine several physical properties, i.e., porosity, matrix, and bulk density, for each of the cores. Subsequently, we place the cores in a triaxial Hoek cell (Hoek and Franklin, 1968) for obtaining the seismic velocity characteristics as a function of stress (i.e., depth below surface). A detailed description of the coring and experimental procedures is given in sections 2.2 and 2.4 of Janssen et al. (2021).

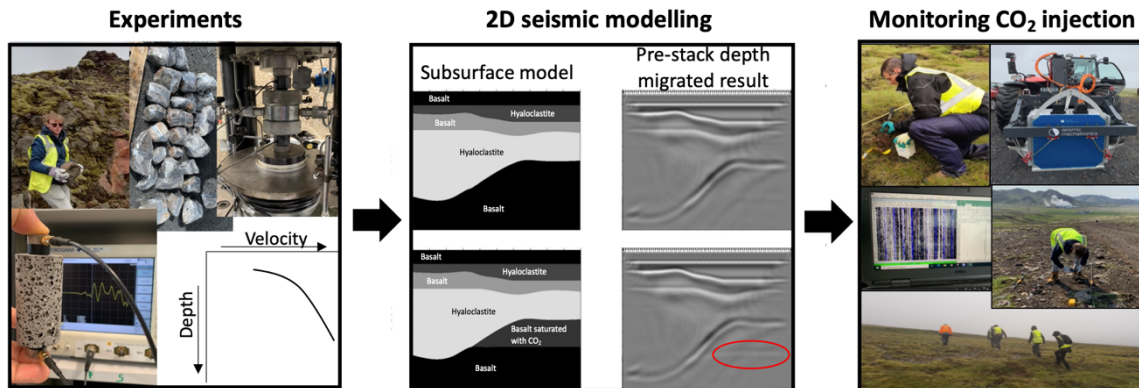


Figure 1 Overview of the workflow. First, we conduct experimental work including sample collection from fresh outcrops and seismic-response characterisation of representative samples (left). Second, we use the obtained velocity profiles as an input for simulating 2D seismic active-source surveys (centre). Finally, we carry out a field acquisition campaign for monitoring the CO₂ injection (right).

Figure 2 shows the results, i.e., compressional (P-)wave velocity (V_p) and shear (S-)wave velocity (V_s) as function of axial stress (σ_1), of the active-source acoustic-assisted confined compressive strength experiments. Results indicate that the effect of increasing depth on V_p is most prominent for the shallow, porous, basalt layers: ~ 1350 m/s per km. It reflects closure of open pore space due to compaction, yielding an increased mineral-to-mineral contact area, thus increasing V_p . Within the basalt samples studied, the rate of increase in V_p gradually reduces to ~ 217 m/s per km for the, relatively, low-porous basalt at >2 km depth. For the hyaloclastites assessed, the effect of increasing stress on V_p seems to be negligible. Most likely, the porous, not well-consolidated, hyaloclastite was already maximum compacted at low absolute stress levels, resulting in negligible amount of compaction at greater depths, thus a fairly constant V_p .

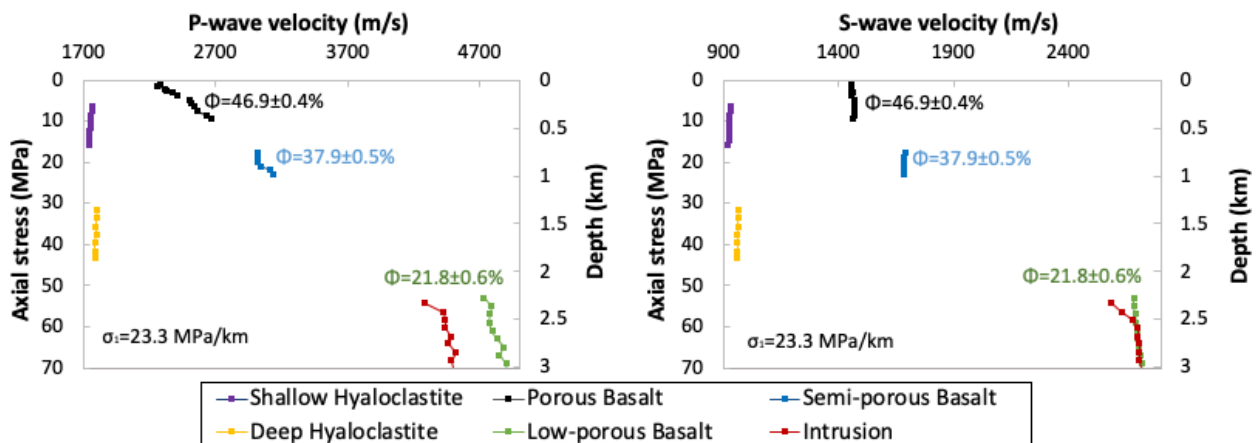


Figure 2 P-wave velocity (left) and S-wave velocity (right) as function of axial stress (σ_1), and thus depth below the surface, for all Icelandic formations studied. Radial stress ($\sigma_2=\sigma_3$) was kept constant at their respective field-representative values: 1 (for depths <153 m) and 5 (depths between 210-412 m) MPa for porous basalt, 7 MPa for shallow hyaloclastite, 18 MPa for semi-porous basalt, 32 MPa for deep hyaloclastite, 53 MPa for low-porous basalt, and 53 MPa for the intrusion. Stress-depth relationships are taken from Batir et al. (2012).

The obtained laboratory results shed light on the stress-dependency of the seismic velocities for all lithologies present at the Hellisheiði geothermal field. The acquired velocity-depth (or velocity-stress) relationships per rock type (Figure 2), which reflect dry pore space conditions, can subsequently be applied to any given stratigraphic section in the vicinity of the Hellisheiði geothermal field for constructing a velocity profile. We do the latter for the area of interest which represents the CO₂ injection location at Hellisheiði (Figure 3). The left part of Figure 3 shows the developed subsurface model, where CO₂ is injected in the basaltic formation at a depth of around 2500±300 m; the centre presents seismic velocity profiles at lateral positions in the model of -2000 m and 1000 m; the right part presents the ratio of V_p over V_s. Note the significant increase in V_p, as function of depth, for the two shallow (<500 m) porous basalt layers, resulting in a similar increase in V_p/V_s ratio as V_s remains relatively constant as function of σ₁ (Figure 2).

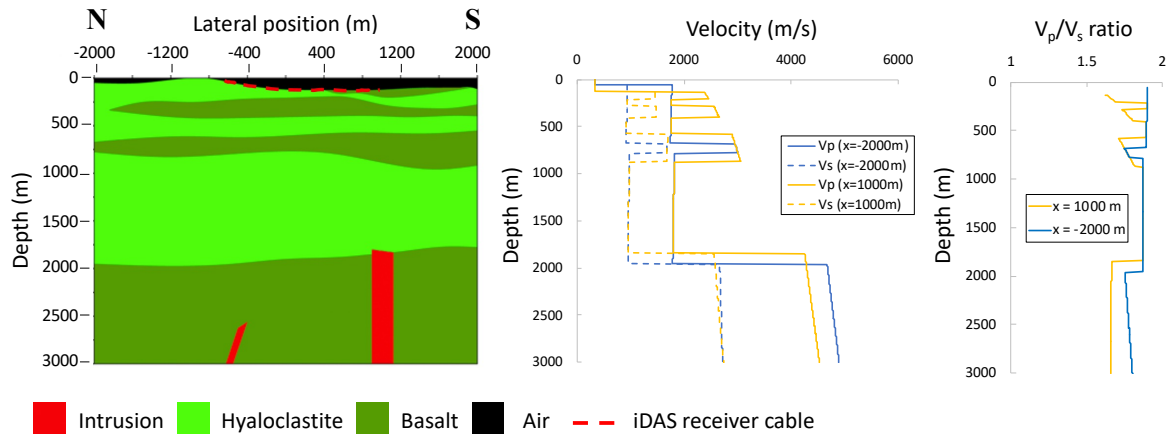


Figure 3 Hellisheiði subsurface model (left), seismic velocity profiles (centre), and V_p/V_s (right) at lateral positions (x) -2000 m and 1000 m.

We then use the obtained stress-dependency of the seismic velocities (Figure 2) for the formations we study as an input for 2D finite-difference modelling (Thorbecke and Draganov, 2011) using the subsurface model presented in Figure 3. Using the preliminary results of the active-source seismic acquisition performed in July 2021 at Hellisheiði (Meneghini et al. 2022), we did some calibration for a revision of the velocity profiles. We used these data as provisional quality-control results. We calculated synthetic seismograms with a 2D finite-difference elastic code (for detail, see Meneghini et al. 2022). Comparison of synthetic and field geophone data revealed that the velocity profiles had to be updated to some extent for the shallow depths in the subsurface model.

Conclusions

We carried out an extensive active-source acoustic-assisted experimental study at field-representative stress conditions in order to obtain the seismic-response characterisation of all rock formations present at Hellisheiði. Results showed that the impact of increasing depth on seismic velocities is most apparent for the shallow porous basalt layers due to its relatively large portion of open pore space, allowing for substantial amounts of compaction. The hyaloclastite formations revealed a negligible effect of increasing depth, thus stress, on its seismic velocity as, most probably, the poorly-consolidated material already reached its maximum compaction at low absolute stress levels, thus at shallow depths. Comparison of synthetic and field geophone data revealed that the velocity profiles had to be updated to some extent for the shallow depths in the model. The processing of the field data is ongoing, and will be used to update the pre-acquisition subsurface model.

Acknowledgements

This project is funded through the ACT – Accelerating CCS Technologies (Project No 294766), the Department for Business, Energy & Industrial Strategy UK (BEIS), the Ministry of Economic Affairs and Climate Policy, the Netherlands, the Scientific and Technological Research Council of Turkey (TUBITAK), Orkuveita Reykjavíkur/Reykjavik Energy Iceland (OR) and Istituto Nazionale di Oceanografia e di Geofisica Sperimentale Italy (OGS). The authors thank Marc Friebel (TU Delft), Jens van den Berg (TU Delft), and Karel Heller (TU Delft) for their technical support.

References

- Ármansson, H. [2018]. An overview of carbon dioxide emissions from Icelandic geothermal areas. *Applied Geochemistry*, **97**, 11-18.
- Batir, J., Davatzes, N.C. and Asmundsson, R. [2012]. Preliminary model of fracture and stress state in the Hellisheidi Geothermal Field, Hengill Volcanic System, Iceland. In *Proceedings of the Thirty-Seventh Workshop on Geothermal Reservoir Engineering, Stanford*.
- Bayer, P., Rybach, L., Blum, P. and Brauchler, R. [2013]. Review on life cycle environmental effects of geothermal power generation. *Renewable and Sustainable Energy Reviews*, **26**, 446-463.
- Bravi, M. and Basosi, R. [2014]. Environmental impact of electricity from selected geothermal power plants in Italy. *Journal of cleaner production*, **66**, 301-308.
- Clark, D.E., Oelkers, E.H., Gunnarsson, I., Sigfússon, B., Snæbjörnsdóttir, S.Ó., Aradóttir, E.S. and Gíslason, S.R. [2020]. CarbFix2: CO₂ and H₂S mineralization during 3.5 years of continuous injection into basaltic rocks at more than 250° C. *Geochimica et Cosmochimica Acta*, **279**, 45-66.
- Fridriksson, T., Mateos, A., Audinet, P. and Orucu, Y. [2016]. *Greenhouse gases from geothermal power production*. World Bank.
- Gíslason, S.R. and Oelkers, E.H. [2014]. Carbon storage in basalt. *Science*, **344**(6182), 373-374.
- Gunnarsson, I., Aradóttir, E.S., Oelkers, E.H., Clark, D.E., Arnarson, M.P., Sigfússon, B., Snæbjörnsdóttir, S.Ó., Matter, J.M., Stute, M., Júlíusson, B.M. and Gíslason, S.R. [2018]. The rapid and cost-effective capture and subsurface mineral storage of carbon and sulfur at the CarbFix2 site. *International Journal of Greenhouse Gas Control*, **79**, 117-126.
- Hoek, E. and Franklin, J. [1968]. Simple triaxial cell for field or laboratory testing of rock. *Transactions of the Institution of Mining and Metallurgy*, **77**, A22-A26.
- Janssen, M.T.G., Barnhoorn, A., Draganov, D., Wolf, K.H.A. and Durucan, S. [2021]. Seismic Velocity Characterisation of Geothermal Reservoir Rocks for CO₂ Storage Performance Assessment. *Applied Sciences*, **11**(8), 3641.
- Meneghini F., Draganov, D., van Otten, G., Poletto, F., Stork, A., Boehm, G., Schleifer, A., Farina, B., Janssen, M.T.G., Bellezza, C., Brynjarsson, B. and Durucan, S. [2022]. Monitoring CO₂ injection: preliminary results from a multi-tool active-seismic acquisition at the Hellisheiði basaltic geothermal reservoir. *83rd EAGE Conference & Exhibition*, extended abstract submitted.
- O'Sullivan, M., Gravatt, M., Popineau, J., O'Sullivan, J., Mannington, W. and McDowell, J. [2021]. Carbon dioxide emissions from geothermal power plants. *Renewable Energy*, **175**, 990-1000.
- Power, I.M., Harrison, A.L., Dipple, G.M., Wilson, S.A., Kelemen, P.B., Hitch, M. and Southam, G. [2013]. Carbon mineralization: from natural analogues to engineered systems. *Reviews in Mineralogy and Geochemistry*, **77**(1), 305-360.
- Sigfússon, B., Arnarson, M.P., Snæbjörnsdóttir, S.Ó., Karlsdóttir, M.R., Aradóttir, E.S. and Gunnarsson, I. [2018]. Reducing emissions of carbon dioxide and hydrogen sulphide at Hellisheidi power plant in 2014-2017 and the role of CarbFix in achieving the 2040 Iceland climate goals. *Energy Procedia*, **146**, 135-145.
- Thorbecke, J. and Draganov, D. [2011]. Finite difference modeling for seismic interferometry: *Geophysics*, **76**, H1-H18, doi: 10.1190/geo2010-0039.1.