

## Adaptive Prescribed Performance Asymptotic Tracking for High-Order Odd-Rational-Power Nonlinear Systems

Lv, Maolong; De Schutter, Bart; Cao, Jinde; Baldi, Simone

**DOI**

[10.1109/TAC.2022.3147271](https://doi.org/10.1109/TAC.2022.3147271)

**Publication date**

2023

**Document Version**

Final published version

**Published in**

IEEE Transactions on Automatic Control

**Citation (APA)**

Lv, M., De Schutter, B., Cao, J., & Baldi, S. (2023). Adaptive Prescribed Performance Asymptotic Tracking for High-Order Odd-Rational-Power Nonlinear Systems. *IEEE Transactions on Automatic Control*, *68*(2), 1047-1053. <https://doi.org/10.1109/TAC.2022.3147271>

**Important note**

To cite this publication, please use the final published version (if applicable). Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

***Green Open Access added to TU Delft Institutional Repository***

***'You share, we take care!' - Taverne project***

**<https://www.openaccess.nl/en/you-share-we-take-care>**

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

# Adaptive Prescribed Performance Asymptotic Tracking for High-Order Odd-Rational-Power Nonlinear Systems

Maolong Lv , Bart De Schutter , *Fellow, IEEE*, Jinde Cao , *Fellow, IEEE*,  
and Simone Baldi , *Senior Member, IEEE*

**Abstract**—Practical tracking results have been reported in the literature for high-order odd-rational-power nonlinear dynamics (a chain of integrators whose power is the ratio of odd integers). Asymptotic tracking remains an open problem for such dynamics. This note gives a positive answer to this problem in the framework of prescribed performance control, without approximation structures (neural networks, fuzzy logic, etc.) being involved in the control design. The unknown system uncertainties are first transformed to unknown but bounded terms using barrier Lyapunov functions, and then these terms are compensated by appropriate adaptation laws. A method is also proposed to extract the control terms in a linear-like fashion during the control design, which overcomes the difficulty that virtual or actual control signals appear in a nonaffine manner. A practical poppet valve system is used to validate the effectiveness of the theoretical findings.

**Index Terms**—Asymptotic tracking, high-order odd-rational-power nonlinear systems, prescribed performance.

## I. INTRODUCTION

Over the last decade, high-order nonlinear dynamics have been attracting great attention. The reason is twofold: first, high-order nonlinear dynamics generalize strict-feedback and pure-feedback dynamics by including more general integrators (with odd integer powers [1]–[3] or ratios of odd integer powers [4]–[11]) in the dynamics; second, high-order nonlinear dynamics appear in some practical systems such as in dynamical boiler-turbine units [12], in classes of hydraulic dynamics

Manuscript received 29 July 2021; accepted 14 January 2022. Date of publication 1 February 2022; date of current version 30 January 2023. This work was supported in part by Double Innovation Plan under Grant 4207012004, in part by the Natural Science Foundation of China under Grant 62073074 and Grant 62003252, in part by the Research fund for international scientists under Grant 62150610499, in part by the Intergovernmental special fund of National Key Research and Development under Grant SQ20121YFE010412, and in part by the Special Funding for Overseas under Grant 6207011901. Recommended by Associate Editor V. Andrieu. (*Corresponding author: Simone Baldi.*)

Maolong Lv is with the College of Air Traffic Control and Navigation, Air Force Engineering University, Xi'an 710051, China, and also with the Delft Center for Systems and Control, Delft University of Technology (TU Delft), 2628 CD Delft, The Netherlands (e-mail: M.Lyu@tudelft.nl).

Bart De Schutter is with the Delft Center for Systems and Control, Delft University of Technology (TU Delft), 2628 CD Delft, The Netherlands (e-mail: b.deschutter@tudelft.nl).

Jinde Cao is with the School of Mathematics, Southeast University, Nanjing 210096, China, and also with Yonsei Frontier Lab, Yonsei University, Seoul 03722, South Korea (e-mail: jdcao@seu.edu.cn).

Simone Baldi is with the School of Mathematics, Southeast University, Nanjing 210096, China, and also with the Delft Center for Systems and Control, Delft University of Technology (TU Delft), 2628 CD Delft, The Netherlands (e-mail: s.baldi@tudelft.nl).

Color versions of one or more figures in this article are available at <https://doi.org/10.1109/TAC.2022.3147271>.

Digital Object Identifier 10.1109/TAC.2022.3147271

[13], or in classes of under-actuated, weakly coupled mechanical systems [1]–[2]. It is well-documented in the literature that high-order nonlinear systems are intrinsically more challenging than strict-feedback and pure-feedback systems, as feedback linearization and backstepping methods fail to work [1]–[2]. A parametric nonlinear adaptive control methodology called adding-one-power-integrator technique, originally proposed in [2], has been successfully applied in stabilizing high-order nonlinear systems [3]–[11]. In the following, let us distinguish and refer to such high-order nonlinear dynamics as high-order odd-integer-power and high-order odd-rational-power nonlinear systems (with high-order odd-integer power being a special case of high-order odd-rational-power).

For high-order odd-rational-power nonlinear systems, both stabilization to zero [5]–[12] and output tracking [3]–[4] have been studied. It is worth remarking that, while stabilization (regulation to zero) can be obtained at the price of imposing growth conditions on the system nonlinearities [5]–[12], no asymptotic tracking results have been reported for these dynamics. All reported results achieve practical tracking in a residual set, either by imposing the aforementioned growth conditions [3]–[4] (see also recent works considering rational or irrational powers [14]–[15]), or by removing growth conditions via the use of universal approximators (e.g., neural networks) [16]. Therefore, two open problems appear for high-order odd-rational-power nonlinear systems: asymptotic tracking is the first one, and avoiding the use of universal approximators is the second one.

The main contribution of this article is to give positive answers to these problems. To this purpose, the unknown system uncertainties are first transformed to some unknown but bounded terms via barrier Lyapunov functions and then these terms are compensated by designing appropriate adaptation laws. To overcome the difficulty that virtual and actual control signals of odd-rational-power dynamics appear in a nonaffine manner and cannot be designed directly, the proposed design is achieved in combination with a newly proposed lemma that allows to deal with the control terms in a “linear-like” fashion. Because the proposed solution is given in the prescribed performance control (PPC) framework, as a further evidence of effectiveness, we show that the proposed result is in line with the state-of-the-art on PPC, since it can also handle the recently studied problem of input quantization [17].

This article is organized as follows: the problem formulation and some useful lemmas are given in Section II. Sections III and IV present the proposed prescribed performance quantized control scheme and asymptotic tracking analysis, respectively. Simulation results are provided in Sections V and VI draws the conclusions.

**Notations:** Notations adopted in this note are:  $\mathbf{R}_{\geq 0}$  denotes the set of nonnegative real numbers,  $\mathbf{R}^i$  represents the Euclidean space with dimension  $i$ , and  $\mathbf{R}_{\text{odd}} \triangleq \{\frac{p}{q} \mid p \text{ and } q \text{ are positive odd integers}\}$ . The symbol “ $\triangleq$ ” means “equal by definition”. Similarly to [10], we define the notation  $[\sigma]^\tau \triangleq |\sigma|^\tau \text{sign}(\sigma)$ ,  $\forall \sigma \in \mathbf{R}$ . For compactness and whenever unambiguous, some variable dependencies might be dropped,

e.g.  $\varepsilon$ ,  $\mu_i$ , and  $\vartheta_i$  can be used to denote  $\varepsilon(x_1, x_2)$ ,  $\vartheta_i(x_1, x_2)$ , and  $\mu_i(x_1, x_2)$ , respectively.

## II. PRELIMINARIES

Let us consider the following uncertain odd-rational-power nonlinear system with input quantization:

$$\begin{cases} \dot{x}_i = \phi_i(\bar{x}_i, t) + \psi_i(\bar{x}_i, t)x_{i+1}^{\frac{p_i}{q_i}}, & i = 1, \dots, n-1 \\ \dot{x}_n = \phi_n(\bar{x}_n, t) + \psi_n(\bar{x}_n, t)(Q(u))^{\frac{p_n}{q_n}} \\ y = x_1 \end{cases} \quad (1)$$

where  $y \in \mathbf{R}$  is the system output;  $u \in \mathbf{R}$  and  $Q(u) \in \mathbf{R}$  are the control input (to be designed) and the quantized control input, respectively;  $\bar{x}_i = [x_1, \dots, x_i]^T \in \mathbf{R}^i$  is an intermediate state, with the full state being  $\bar{x}_n$ . We assume that  $\frac{p_i}{q_i} \in \mathbf{R}_{\text{odd}}$ ,  $i = 1, \dots, n$ , are known odd-rational-powers. The system nonlinearities  $\phi_i(\cdot, \cdot) : \mathbf{R}^i \times \mathbf{R}_{\geq 0} \rightarrow \mathbf{R}$  are locally Lipschitz in  $\bar{x}_i$ . The control-gain functions  $\psi_i(\cdot, \cdot) : \mathbf{R}^i \times \mathbf{R}_{\geq 0} \rightarrow \mathbf{R}$  are locally Lipschitz in  $\bar{x}_i$  and are either strictly positive or strictly negative, and their signs are assumed to be known. Without loss of generality, in the following, we assume  $\text{sign}(\psi_i) = 1$ ,  $i = 1, \dots, n$ . In line with [18]–[20], we assume that there exist continuous and nonnegative functions  $\bar{\phi}_i(\cdot) : \mathbf{R}^i \rightarrow \mathbf{R}_{\geq 0}$ ,  $i = 1, \dots, n$ , such that  $|\phi(\bar{x}_i, t)| \leq \bar{\phi}_i(\bar{x}_i)$ ,  $\forall (\bar{x}_i, t) \in \mathbf{R}^i \times \mathbf{R}_{\geq 0}$ .

$$Q(u) = \begin{cases} \nu_+^k, & \text{if } \begin{cases} \frac{\nu_+^k}{1+\varrho_+} < u < \nu_+^k, \dot{u} < 0, \text{ or,} \\ \nu_+^k < u < \frac{\nu_+^k}{1-\varrho_+}, \dot{u} > 0, \end{cases} \\ \nu_+^k(1+\varrho_+), & \text{if } \begin{cases} \nu_+^k < u \leq \frac{\nu_+^k}{1-\varrho_+}, \dot{u} < 0, \text{ or,} \\ \frac{\nu_+^k}{1-\varrho_+} < u \leq \frac{(1+\varrho_+)\nu_+^k}{1-\varrho_+}, \dot{u} > 0, \end{cases} \\ 0, & \text{if } \begin{cases} 0 \leq u < \frac{\nu_{\min}^+}{1+\varrho_+}, \dot{u} > 0, \text{ or,} \\ \frac{\nu_{\min}^+}{1+\varrho_+} \leq u \leq \nu_{\min}^+, \dot{u} > 0, \end{cases} \end{cases}$$

$$\text{and } \begin{cases} \nu_-^k, & \text{if } \begin{cases} \nu_-^k \leq u < \frac{\nu_-^k}{1+\varrho_-}, \dot{u} > 0, \text{ or,} \\ \frac{\nu_-^k}{1-\varrho_-} \leq u < \nu_-^k, \dot{u} < 0, \end{cases} \\ \nu_-^k(1+\varrho_-), & \text{if } \begin{cases} \frac{\nu_-^k}{1-\varrho_-} \leq u < \nu_-^k, \dot{u} > 0, \text{ or,} \\ \frac{(1+\varrho_-)\nu_-^k}{1-\varrho_-} \leq u < \frac{\nu_-^k}{1-\varrho_-}, \dot{u} < 0, \end{cases} \\ 0, & \text{if } \begin{cases} \frac{\nu_{\min}^-}{1+\varrho_-} < u \leq 0, \text{ or,} \\ \nu_{\min}^- \leq u \leq \frac{\nu_{\min}^-}{1+\varrho_-}, \dot{u} < 0, \end{cases} \\ Q(u(t^-)), & \dot{u} = 0 \end{cases} \quad (2)$$

*Assumption 1* (see[19]): The desired trajectory  $y_r(\cdot)$  is known and bounded, and  $\dot{y}_r(\cdot)$  is bounded but its bound is not necessarily known.

*Remark 1:* Assumption 1 implies that only the desired trajectory (none of its derivatives) can be used for control design.

*Remark 2:* System (1) generalizes the classes of systems considered in literature for PPC: more specifically, (1) reduces to the strict-feedback classes of [17]–[20] when  $r_i = 1$ ,  $i = 1, \dots, n$ , while it reduces to the high-order integer-power classes of [1]–[3] when  $q_i = 1$  and  $p_i \neq 1$ ,  $i = 1, \dots, n$ .

Let us consider the asymmetric hysteresis quantizer (2) originally proposed in [21] (see Remark 3 for details of this choice). As typical in literature (cf. [22]), we denote such quantizer simply as  $Q(u)$ , even though the quantizer formally depends on both  $u$  and its derivative. In (2),  $\nu_+^k = \bar{h}_+^{1-k}\nu_{\min}^+$  and  $\nu_-^k = \bar{h}_-^{1-k}\nu_{\min}^-$ ,  $k = 1, 2, \dots$ , with  $\bar{h}_+ = \frac{1-\varrho_+}{1+\varrho_+}$  and  $\bar{h}_- = \frac{1-\varrho_-}{1+\varrho_-}$ ;  $Q(u(t^-))$  is the latest status prior to  $Q(u(t))$ , and  $\nu_{\min}^+$  and  $\nu_{\min}^-$  denote the size of the dead-zone for  $Q(u)$ . The constants  $\varrho_+$ ,  $\varrho_- \in (0, 1)$  determine the quantization density, i.e., the larger  $\varrho_+$  and  $\varrho_-$ , the coarser the quantizer.

*Remark 3:* The interest in considering an asymmetric hysteresis quantizer is that it generalizes the uniform quantizer [21], logarithmic quantizer [21], and symmetric hysteresis quantizer [22], while its hysteresis property is of paramount importance in guaranteeing the absence of chattering and Zeno behavior. These issues have been thoroughly discussed in [17, Remark 8 and Lemma A.1] and are not further discussed here due to space limitations.

In line with [21], let us decompose (2) as

$$Q(u) = \zeta(u)u + d(u) \quad (3)$$

where  $\zeta(u) = \frac{Q(u)}{u}$  and  $d(u) = 0$  when  $Q(u) \neq 0$ , and  $\zeta(u) = 1$  and  $d(u) = -u$  when  $Q(u) = 0$ .

Before presenting the proposed prescribed performance quantized control, the following lemmas are useful to derive the main results.

*Lemma 1* (see[21]): The control coefficient  $\zeta(u)$  and input quantization error  $d(u)$  in (3) are such that

$$\underline{\zeta}_{\min} \leq \zeta(u) \leq \bar{\zeta}_{\max}, \text{ and } |d(u)| \leq \bar{d} \quad (4)$$

where  $\underline{\zeta}_{\min} = 1 - \max\{\varrho_+, \varrho_-\}$ ,  $\bar{\zeta}_{\max} = 1 + \max\{\varrho_+, \varrho_-\}$  and  $\bar{d} = \max\{\nu_{\min}^+, |\nu_{\min}^-|\}$ .

*Lemma 2* (see[10]): Suppose  $\frac{p}{q} \in \mathbf{R}_{\text{odd}}$ , then for any  $x_1 \in \mathbf{R}$  and  $x_2 \in \mathbf{R}$ , it holds that

$$\left| x_1^{\frac{p}{q}} - x_2^{\frac{p}{q}} \right| \leq 2^{1-\frac{1}{q}} \left| [x_1]^p - [x_2]^p \right|^{\frac{1}{q}}. \quad (5)$$

*Lemma 3* (see[23]–[27]): The following inequality holds for any  $\eta > 0$  and for any  $h \in \mathbf{R}$ :

$$0 \leq |h| - \frac{h^2}{\sqrt{h^2 + \eta^2}} < \eta. \quad (6)$$

*Lemma 4* (see[1]): For any  $x_1, x_2 \in \mathbf{R}$ , any positive integers  $b_1, b_2$  and any real-valued function  $\delta(\cdot, \cdot)$  with  $\varepsilon(x_1, x_2) > 0$ , it holds that

$$|x_1|^{b_1}|x_2|^{b_2} \leq \frac{b_1\varepsilon|x_1|^{b_1+b_2}}{b_1+b_2} + \frac{b_2\varepsilon^{-\frac{b_1}{b_2}}|x_2|^{b_1+b_2}}{b_1+b_2}. \quad (7)$$

*Lemma 5:* For any  $x_1, x_2 \in \mathbf{R}$  and positive odd integers  $p$  and  $q$ , there exist real-valued functions  $\mu(\cdot, \cdot)$  and  $\vartheta(\cdot, \cdot)$ , such that

$$(x_1 + x_2)^{\frac{p}{q}} = (\vartheta(x_1, x_2)x_1^p + \mu(x_1, x_2)x_2^p)^{\frac{1}{q}} \quad (8)$$

where  $\vartheta(x_1, x_2) \subseteq [1 - \bar{\varepsilon}, \max\{1 + \bar{\varepsilon}, 2^{p-1}\}]$  with  $\bar{\varepsilon} = \sum_{k=1}^{p-1} \frac{k}{p} \varepsilon^{\frac{k}{p}}$  a constant that can be made to take value in (0,1) by selecting some appropriately small positive constant  $\varepsilon$ , and where  $\mu(x_1, x_2)$  satisfies  $|\mu(x_1, x_2)| \leq \bar{\nu}$  with  $\bar{\nu} = \max\{1 + \omega, 2^{p-1}\}$  and  $\omega = \sum_{k=1}^{p-1} \frac{p-k}{p} \binom{p}{k} \varepsilon^{\frac{p-k}{p}}$  positive constants that are independent of  $x_1$  and  $x_2$ .

*Proof:* See appendix.  $\blacksquare$

## III. ADAPTIVE PPC DESIGN

Let us begin the control design by defining the state errors [17]

$$e_1(t) = x_1(t) - y_r(t) \quad (9)$$

$$e_i(t) = x_i(t) - \alpha_{i-1}(t), \quad i = 2, \dots, n \quad (10)$$

where  $\alpha_{i-1}$  denotes a virtual control law whose design will be explained later. Define the normalized error variables

$$\zeta_i(t) = \frac{e_i(t)}{\kappa_i(t)} \quad (11)$$

where  $\kappa_i(t) = (\kappa_{i,0} - \kappa_{i,\infty})\exp(-\iota_i t) + \kappa_{i,\infty}$ ,  $i = 1, \dots, n$ , is the so-called *prescribed performance function* [28], where  $\kappa_{i,0} > 0$ ,  $\kappa_{i,\infty} > 0$ , and  $\iota_i > 0$  are design constants, and  $|e_i(0)| < \kappa_{i,0}$ .

The goal is to design a control  $u$  for (1) such that the system output  $y$  asymptotically tracks the reference signal  $y_r$ , while having  $e_i$  satisfying the prescribed performance. Since existing literature [21] and [23] has shown that asymptotic tracking can be realized for some classes of

dynamics in the presence of input quantization, we set an asymptotic tracking goal for dynamics (1) in this article.

Hereafter is the proposed design for the virtual control laws and for the actual control law. The motivation behind this design is explained via the stability analysis in Section IV. Specifically, we devise the virtual and actual control laws as follows:

$$\alpha_i = -\bar{\vartheta}_i^{-\frac{1}{p_i}} \left( k_i \varpi_i + \frac{c_i \varpi_i \hat{\Xi}_i}{\sqrt{\varpi_i^2 + \sigma^2(t)}} \right)^{\frac{q_i}{p_i}}, \quad i = 1, \dots, n-1 \quad (12)$$

$$\triangleq \alpha_i^*(\zeta_i, \hat{\Xi}_i, t) \quad (13)$$

$$u = -\bar{\zeta}_{\max}^{-1} \bar{\vartheta}_n^{-\frac{1}{p_n}} \left( k_n \varpi_n + \frac{c_n \varpi_n \hat{\Xi}_n}{\sqrt{\varpi_n^2 + \sigma^2(t)}} \right)^{\frac{q_n}{p_n}} \quad (14)$$

$$\triangleq \alpha_n^*(\zeta_n, \hat{\Xi}_n, t) \quad (15)$$

where  $\varpi_i = \frac{\zeta_i + \zeta_i^3}{(1 - \zeta_i^2)^3}$ ,  $\bar{\vartheta}_i = \max\{1 + \bar{\epsilon}_i, 2^{p_i-1}\}$  with  $\bar{\epsilon}_i$  being an arbitrary constant in  $(0,1)$ ,  $k_i > 0$ , and  $c_i > 0$  are design constants. The terms  $\hat{\Xi}_i$  in (12) and (14) are updated by the adaptation laws

$$\dot{\hat{\Xi}}_i = \frac{\gamma_i \varpi_i^2}{\sqrt{\varpi_i^2 + \sigma^2(t)}} \triangleq \beta_{n+i}(\zeta_i, t) \geq 0, \quad i = 1, \dots, n. \quad (16)$$

with initial conditions  $\hat{\Xi}_i^0 = \hat{\Xi}_i(0) \geq 0$ , where  $\gamma_i > 0$  is a design constant, and  $\sigma(\cdot)$  is a positive integrable function satisfying  $\int_0^t \sigma(\tau) d\tau \leq \bar{\sigma} < \infty$  and  $|\dot{\sigma}(t)| \leq \sigma^*$  for  $\forall t \geq 0$  with constants  $\bar{\sigma} > 0$  and  $\sigma^* > 0$ .

*Remark 4:* Common forms adopted in the literature for the positive integrable function  $\sigma(\cdot)$  include  $\varpi \exp(-\lambda t)$  as in [23]–[26], and  $\frac{1}{\varpi + t^{2\epsilon}}$  as in [20] and [27], with design constants  $\varpi > 0$ ,  $\lambda > 0$ , and  $\epsilon > 0$ . The numerical simulations in these works typically select small values for  $\lambda$  and  $\epsilon$ , yielding a slow decay rate of  $\sigma(\cdot)$ . This helps avoiding numerical integration problems that might arise when  $\sigma(\cdot)$  becomes smaller and smaller.

#### IV. ASYMPTOTIC TRACKING ANALYSIS

The following theorem summarizes the main results of this article.

*Theorem 1:* Let Assumption 1 hold. Consider the closed-loop odd-rational-power nonlinear system (1) with hysteresis quantizer (2), control laws (12)–(15), and adaptation law (16). Then, it holds that

- 1) the state errors  $e_i(t)$ ,  $i = 1, \dots, n$ , are such that  $|e_i(t)| < \kappa_i(t)$  for all  $t \geq 0$ ;
- 2) the output tracking error  $e_1(t) = y(t) - y_r(t)$  satisfies  $e_1(t) \rightarrow 0$  as  $t \rightarrow +\infty$ ;
- 3) all closed-loop signals remain bounded.

*Proof:* (Time dependence will be kept only for the functions  $\kappa_i$  and  $y_r$ , and will be otherwise omitted whenever unambiguous). It follows from (9) to (11) that the states  $x_1, \dots, x_n$  can be rewritten as

$$x_1 = \zeta_1 \kappa_1(t) + y_r(t) \triangleq \chi_1(\zeta_1, t) \quad (17)$$

$$x_i = \zeta_i \kappa_i(t) + \alpha_{i-1} \triangleq \chi_i(\zeta_{i-1}, \zeta_i, t), \quad i = 2, \dots, n. \quad (18)$$

Differentiating the normalized errors  $\zeta_i$  in (11) with respect to time and using (12)–(16) and the dynamics in (1) gives

$$\begin{aligned} \dot{\zeta}_1 &= \frac{1}{\kappa_1(t)} \left[ \phi_1(\chi_1, t) + \psi_1(\chi_1, t) \chi_2^{\frac{p_1}{q_1}} - \dot{y}_r(t) - \dot{\kappa}_1(t) \zeta_1 \right] \\ &\triangleq \beta_1(\zeta_1, \zeta_2, \hat{\Xi}_1, t) \end{aligned} \quad (19)$$

$$\dot{\zeta}_i = \frac{1}{\kappa_i(t)} \left[ \phi_i(\bar{\chi}_i, t) + \psi_i(\bar{\chi}_i, t) \chi_{i+1}^{\frac{p_i}{q_i}} - \frac{\partial \alpha_{i-1}^*}{\partial t} - \frac{\partial \alpha_{i-1}^*}{\partial \zeta_{i-1}} \beta_{i-1} \right]$$

$$\begin{aligned} & - \frac{\partial \alpha_{i-1}^*}{\partial \hat{\Xi}_i} \dot{\hat{\Xi}}_i - \dot{\kappa}_i(t) \zeta_i \Big] \\ &\triangleq \beta_i(\zeta_1, \dots, \zeta_{i+1}, \hat{\Xi}_1, \dots, \hat{\Xi}_i, t), \quad i = 2, \dots, n-1 \end{aligned} \quad (20)$$

$$\begin{aligned} \dot{\zeta}_n &= \frac{1}{\kappa_n(t)} \left[ \phi_n(\bar{\chi}_n, t) + \psi_n(\bar{\chi}_n, t) (Q(u))^{\frac{p_n}{q_n}} - \frac{\partial \alpha_{n-1}^*}{\partial t} \right. \\ & \quad \left. - \frac{\partial \alpha_{n-1}^*}{\partial \zeta_{n-1}} \beta_{n-1} - \frac{\partial \alpha_{n-1}^*}{\partial \hat{\Xi}_n} \dot{\hat{\Xi}}_n - \dot{\kappa}_n(t) \zeta_n \right] \\ &\triangleq \beta_n(\zeta_1, \dots, \zeta_n, \hat{\Xi}_1, \dots, \hat{\Xi}_n, t) \end{aligned} \quad (21)$$

where  $\bar{\chi}_i \triangleq [\chi_1, \dots, \chi_i]^T$ ,  $i = 1, \dots, n$ . For compactness, let us define  $\xi = [\zeta_1, \dots, \zeta_n, \hat{\Xi}_1, \dots, \hat{\Xi}_n]^T$  and let us rewrite (16) and (19)–(21) in the form of

$$\begin{aligned} \dot{\xi} &= \beta(\xi, t) = \left[ \beta_1(\bar{\zeta}_2, \hat{\Xi}_1, t), \dots, \beta_i(\bar{\zeta}_i, \dots, \hat{\Xi}_i), \dots \right. \\ & \quad \left. \beta_n(\bar{\zeta}_n, \dots, \hat{\Xi}_n), \beta_{n+1}(\zeta_1, t), \dots, \beta_{2n}(\zeta_n, t) \right]^T \end{aligned} \quad (22)$$

where  $\bar{\zeta}_i = [\zeta_1, \dots, \zeta_i]^T$ ,  $\hat{\Xi}_i = [\hat{\Xi}_1, \dots, \hat{\Xi}_i]^T$ ,  $i = 2, \dots, n$ . Define the open set  $\Theta_\xi = \Theta_{\xi,1} \times \dots \times \Theta_{\xi,i} \times \dots \times \Theta_{\xi,n} \times \mathbf{R}^{n \times 1}$  with  $\Theta_{\xi,i} = (-1, 1)$ ,  $i = 1, \dots, n$ . It is straightforward to verify that  $\xi(0) = [\zeta_1(0), \dots, \zeta_n(0), \hat{\Xi}_1^0, \dots, \hat{\Xi}_n^0]^T \subseteq \Theta_\xi$  due to  $|e_i(0)| < \kappa_{i,0}$ . Note that  $\beta(\cdot, \cdot) : \Theta_\xi \times \mathbf{R}_+ \rightarrow \mathbf{R}^{2n \times 1}$  is piecewise continuous in  $t$  and locally Lipschitz in  $\Theta_\xi$ ;  $\phi_i$  and  $\psi_i$  are piecewise continuous in  $t$  and locally Lipschitz in  $\bar{x}_i$ ;  $y_r(\cdot)$  and  $\kappa_i(\cdot)$  are bounded and differentiable. Then, it follows from [29, Th. 54] that there exists a unique maximal solution  $\xi(\cdot)$  of (22) on the time interval  $[0, \tau_{\max})$ , where  $\tau_{\max} < +\infty$  is chosen such that  $\xi(t) \in \Theta_\xi$  for all  $t \in [0, \tau_{\max})$ . In what follows, we first suppose  $\tau_{\max} < +\infty$ , and eventually we prove by a contradiction that  $\tau_{\max}$  must be extended to  $+\infty$ .

Let us consider the barrier Lyapunov function candidates

$$\mathcal{L}_i = \frac{\zeta_i^2}{2(1 - \zeta_i^2)^2} + \frac{1}{2\gamma_i} c_i \varrho_i \hat{\Xi}_i^2, \quad i = 1, \dots, n \quad (23)$$

which are positive definite and continuously differentiable over  $\Theta_\xi$ , where  $\hat{\Xi}_i = \Xi_i - \hat{\Xi}_i$ ,  $\varrho_i > 0$ ,  $\Xi_i$  are unknown constants whose specific expressions are given after (30), and  $\hat{\Xi}_i$  is the estimate of  $\Xi_i$ . Consider the following induction steps on the time interval  $[0, \tau_{\max})$ .

*Step 0:* Note from (17) that  $\alpha_0 \triangleq y_r(t)$ ,  $\dot{\alpha}_0$ , and  $x_1$  are bounded on  $[0, \tau_{\max})$  as a result of  $\zeta_1$ ,  $\kappa_1(t)$ ,  $y_r(t)$ , and  $\dot{y}_r(t)$  being bounded on  $[0, \tau_{\max})$ .

*Step i:* ( $i \in \{1, \dots, n-1\}$ ): Consider that at step  $i-1$ , we have shown  $x_1(\cdot), \dots, x_{i-1}(\cdot)$ ,  $\alpha_{i-1}$ , and  $\dot{\alpha}_{i-1}(\cdot)$  to be bounded on  $[0, \tau_{\max})$ . From (18), we further have that  $x_i(\cdot)$  is bounded on  $[0, \tau_{\max})$ . Then, it follows from (1), (10), (18), and (20) that the time derivative of  $\mathcal{L}_i$  is

$$\begin{aligned} \dot{\mathcal{L}}_i &= \frac{\varpi_i}{\kappa_i(t)} \left[ \phi_i(\bar{x}_i, t) + \psi_i(\bar{x}_i, t) (e_{i+1} + \alpha_i)^{\frac{p_i}{q_i}} - \dot{\kappa}_i(t) \zeta_i \right. \\ & \quad \left. - \dot{\alpha}_{i-1} \right] - \frac{1}{\gamma_i} c_i \varrho_i \hat{\Xi}_i \dot{\hat{\Xi}}_i, \quad t \in [0, \tau_{\max}) \end{aligned} \quad (24)$$

Applying Lemma 5 to  $x_{i+1}^{\frac{p_i}{q_i}}$  gives

$$x_{i+1}^{\frac{p_i}{q_i}} = \left[ \vartheta_i(e_{i+1}, \alpha_i) \alpha_i^{p_i} + \mu_i(e_{i+1}, \alpha_i) e_{i+1}^{p_i} \right]^{\frac{1}{q_i}} \quad (25)$$

where  $\vartheta_i(\cdot, \cdot)$  and  $\mu_i(\cdot, \cdot)$  are some real-valued functions satisfying  $1 - \bar{\epsilon}_i \leq \vartheta_i(\cdot, \cdot) \leq \max\{1 + \bar{\epsilon}_i, 2^{p_i-1}\}$  with  $\bar{\epsilon}_i$  being an arbitrary constant taking value in  $(0,1)$ , and  $|\mu_i(\cdot, \cdot)| \leq \bar{\nu}_i$ , with  $\bar{\nu}_i > 0$  being a constant which is independent of  $e_{i+1}$  and  $\alpha_i$ .

The following inequality results from applying Lemma 2 to (25):

$$\left| x_{i+1}^{\frac{p_i}{q_i}} - (\vartheta_i(e_{i+1}, \alpha_i) \alpha_i^{p_i})^{\frac{1}{q_i}} \right| \leq 2^{1-\frac{1}{q_i}} \left| \mu_i(e_{i+1}, \alpha_i) e_{i+1}^{p_i} \right|^{\frac{1}{q_i}}$$

$$\leq \bar{E}_i, t \in [0, \tau_{\max}) \quad (26)$$

where  $\bar{E}_i > 0$  is an upper bound of  $E_i(e_{i+1}, \alpha_i) \triangleq 2^{1-\frac{1}{q_i}}$ .  $\left| \mu_i(e_{i+1}, \alpha_i) e_{i+1}^{\frac{p_i}{q_i}} \right|^{\frac{1}{q_i}}$ , which is bounded due to the boundedness of  $\mu_i(e_{i+1}, \alpha_i)$ , and  $e_{i+1}(t)$  on  $[0, \tau_{\max})$ . Hence, it follows that:

$$x_{i+1}^{\frac{p_i}{q_i}} = (\vartheta_i(e_{i+1}, \alpha_i) \alpha_i^{\frac{p_i}{q_i}})^{\frac{1}{q_i}} + \ell_i \bar{E}_i, t \in [0, \tau_{\max}) \quad (27)$$

for some function  $\ell_i \subseteq (-1, 1)$ . Substituting the virtual control law  $\alpha_i$  (12) and (27) into (24) yields

$$\begin{aligned} \dot{\mathcal{L}}_i &\leq |F_i(t)| |\varpi_i| - k_i H_i(t) \varpi_i^2 - \frac{c_i \psi_i(\bar{x}_i, t) \varpi_i^2 \hat{\Xi}_i}{\kappa_i(t) \sqrt{\varpi_i^2 + \sigma^2(t)}} \\ &\quad - \frac{1}{\gamma_i} c_i \varrho_i \hat{\Xi}_i \dot{\hat{\Xi}}_i, t \in [0, \tau_{\max}) \end{aligned} \quad (28)$$

where  $|F_i(t)| \triangleq \frac{1}{\kappa_i(t)} [|\phi_i(\bar{x}_i, t)| + |\dot{\alpha}_{i-1}| + |\ell_i \psi_i(\bar{x}_i, t)| \bar{E}_i + |\dot{\kappa}_i(t) \zeta_i|]$  and  $H_i(t) = \frac{\psi_i(\bar{x}_i, t)}{\kappa_i(t)}$ ,  $i = 1, \dots, n-1$ . Using the fact that  $|\zeta_i(t)| < 1$  for all  $t \in [0, \tau_{\max})$ ,  $i = 1, \dots, n$ , and that  $y_r(\cdot)$ ,  $\kappa_i(\cdot)$ ,  $\dot{\kappa}_i(\cdot)$ ,  $x_1(\cdot), \dots, x_i(\cdot)$ ,  $\dot{\alpha}_{i-1}(\cdot)$  are bounded on  $[0, \tau_{\max})$ , we get from the extreme value theorem that there exist unknown constants  $\bar{\psi}_i > 0$ ,  $\underline{\psi}_i > 0$ ,  $\bar{E}_i > 0$ ,  $\underline{E}_i > 0$ ,  $\bar{H}_i > 0$ , and  $\underline{H}_i > 0$  such that

$$\underline{\psi}_i \leq |\psi_i(\cdot, \cdot)| \leq \bar{\psi}_i, \underline{E}_i \leq F_i(\cdot) \leq \bar{E}_i, \underline{H}_i \leq H_i(\cdot) \leq \bar{H}_i \quad (29)$$

on  $[0, \tau_{\max})$ . Substituting (29) and adaptation law (16) into (28) gives

$$\begin{aligned} \dot{\mathcal{L}}_i &\leq -k_i \underline{H}_i \varpi_i^2 + \bar{F}_i |\varpi_i| - \frac{c_i \psi_i(\bar{x}_i, t) \varpi_i^2 \hat{\Xi}_i}{\kappa_i(t) \sqrt{\varpi_i^2 + \sigma^2(t)}} \\ &\quad + \frac{c_i \varrho_i \varpi_i^2 \hat{\Xi}_i}{\sqrt{\varpi_i^2 + \sigma^2(t)}} - \frac{c_i \varrho_i \varpi_i^2 \Xi_i}{\sqrt{\varpi_i^2 + \sigma^2(t)}}, t \in [0, \tau_{\max}) \end{aligned} \quad (30)$$

Note from (16) that  $\hat{\Xi}_i(t) \geq 0, \forall t \geq 0$ . After defining  $\varrho_i = \frac{\psi_i}{\kappa_{i,0}}$  and  $\Xi_i = \frac{\bar{F}_i}{c_i \varrho_i}$ , and applying Lemma 3 to (30) results in

$$\dot{\mathcal{L}}_i \leq -k_i \underline{H}_i \varpi_i^2 + \bar{F}_i \sigma(t), t \in [0, \tau_{\max}). \quad (31)$$

Integrating (31) over  $[0, t)$  leads to

$$\mathcal{L}_i(t) + \int_0^t k_i \underline{H}_i \varpi_i^2(s) ds \leq \mathcal{L}_i(0) + \bar{F}_i \bar{\sigma} \triangleq \bar{\delta}_i, t \in [0, \tau_{\max}) \quad (32)$$

which, combined with (23), implies that

$$\frac{\zeta_i^2}{2(1-\zeta_i^2)^2} \leq \mathcal{L}_i(t) \leq \bar{\delta}_i, \text{ and } \frac{c_i \varrho_i \hat{\Xi}_i^2}{2\gamma_i} \leq \mathcal{L}_i(t) \leq \bar{\delta}_i \quad (33)$$

$\forall t \in [0, \tau_{\max})$ . Solving (33) results in

$$|\zeta_i| \leq \bar{\zeta}_i \triangleq \sqrt{1 - \frac{\sqrt{8\bar{\delta}_i + 1} - 1}{4\bar{\delta}_i}} < 1, t \in [0, \tau_{\max}) \quad (34)$$

$$|\hat{\Xi}_i| \leq \hat{\Xi}_i^* \triangleq \Xi_i + \sqrt{\frac{2\gamma_i \bar{\delta}_i}{c_i \varrho_i}}, t \in [0, \tau_{\max}). \quad (35)$$

Note that (34) implies the boundedness of  $\varpi_i$ , which together with (35) ensures the boundedness of  $\alpha_i$  and  $x_{i+1}$  on  $[0, \tau_{\max})$  according to (12) and (10), respectively. Then, it can be derived that the time derivative of  $\varpi_i$  can be bounded by

$$\begin{aligned} |\dot{\varpi}_i| &\leq \frac{4\zeta_i^2 + 1}{k_i(t) [1 - \zeta_i^2]^2} \left[ |\phi_i(\bar{x}_i, t)| + \bar{\psi}_i \vartheta_i^{\frac{1}{q_i}} \left| \alpha_i^{\frac{p_i}{q_i}} \right| + \bar{\psi}_i |\ell_i| \bar{E}_i \right. \\ &\quad \left. + |\dot{\alpha}_{i-1}| + |\dot{\kappa}_i(t) \zeta_i| \right], t \in [0, \tau_{\max}). \end{aligned} \quad (36)$$

Invoking (12), (36), and the boundedness of  $\varpi_i$ , the time derivative of virtual control law  $\alpha_i$  can be bounded by

$$\begin{aligned} |\dot{\alpha}_i| &\leq \frac{q_i}{p_i} \vartheta_i^{\frac{-1}{p_i}} \left( k_i |\varpi_i| + \frac{c_i \hat{\Xi}_i |\varpi_i|}{\sqrt{\varpi_i^2 + \sigma^2(t)}} \right)^{r_i} \left[ \frac{c_i \hat{\Xi}_i |\dot{\varpi}_i|}{(\varpi_i^2 + \sigma^2)^{\frac{1}{2}}} \right. \\ &\quad \left. + k_i |\dot{\varpi}_i| + \frac{c_i \gamma_i |\varpi_i^3|}{\varpi_i^2 + \sigma^2} + \frac{c_i \hat{\Xi}_i \varpi_i^2 |\dot{\varpi}_i|}{(\varpi_i^2 + \sigma^2)^{\frac{3}{2}}} + \frac{c_i \hat{\Xi}_i \varpi_i \sigma |\dot{\sigma}|}{(\varpi_i^2 + \sigma^2)^{\frac{3}{2}}} \right] \\ &\text{for } t \in [0, \tau_{\max}) \end{aligned} \quad (37)$$

where  $r_i = \frac{q_i - p_i}{p_i}$ .

Step  $n$ : Similarly to Step  $i$ , we obtain the derivative of  $\mathcal{L}_n$  as

$$\begin{aligned} \dot{\mathcal{L}}_n &= \frac{\varpi_n}{\kappa_n(t)} \left[ \phi_n(\bar{x}_n, t) + \psi_n(\bar{x}_n, t) \left( \vartheta_n^{\frac{1}{q_n}} \zeta_n^{\frac{p_n}{q_n}}(u) u^{\frac{p_n}{q_n}} + \ell_n \bar{E}_n \right) \right. \\ &\quad \left. - \dot{\kappa}_n(t) \zeta_n - \dot{\alpha}_{n-1} \right] - \frac{c_n \varrho_n \hat{\Xi}_n \dot{\hat{\Xi}}_n}{\gamma_n}, t \in [0, \tau_{\max}) \end{aligned} \quad (38)$$

where the function  $\ell_n \subseteq (-1, 1)$ , and  $\bar{E}_n = 2^{1-\frac{1}{q_n}} |\mu_n \bar{d}^{p_n}|^{\frac{1}{q_n}}$ . Substituting actual control  $u$  as in (14) into (38) yields

$$\begin{aligned} \dot{\mathcal{L}}_n &\leq |F_n(t)| |\varpi_n| - k_n H_n(t) \varpi_n^2 - \frac{c_n \psi_n(\bar{x}_n, t) \varpi_n^2 \hat{\Xi}_n}{\kappa_n(t) \sqrt{\varpi_n^2 + \sigma^2(t)}} \\ &\quad - \frac{1}{\gamma_n} c_n \varrho_n \hat{\Xi}_n \dot{\hat{\Xi}}_n, t \in [0, \tau_{\max}) \end{aligned} \quad (39)$$

where  $|F_n(t)| \triangleq \frac{1}{\kappa_n(t)} [|\phi_n(\bar{x}_n, t)| + |\dot{\alpha}_{n-1}| + |\ell_n \psi_n(\bar{x}_n, t)| \bar{E}_n + |\dot{\kappa}_n(t) \zeta_n|]$  and  $H_n(t) = \frac{\psi_n(\bar{x}_n, t)}{\kappa_n(t)}$ . Similarly to the analysis after (28), there exist unknown constants  $\bar{\psi}_n > 0$ ,  $\underline{\psi}_n > 0$ ,  $\bar{E}_n > 0$ ,  $\underline{E}_n > 0$ ,  $\bar{H}_n > 0$ , and  $\underline{H}_n > 0$  such that

$$\underline{\psi}_n \leq |\psi_n(\cdot, \cdot)| \leq \bar{\psi}_n, \underline{E}_n \leq F_n(\cdot) \leq \bar{E}_n, \underline{H}_n \leq H_n(\cdot) \leq \bar{H}_n \quad (40)$$

on  $[0, \tau_{\max})$ . Substituting (40) and adaptation law (16) into (39) and conducting the same steps as (31)–(35), it is possible to obtain

$$|\zeta_n| \leq \bar{\zeta}_n \triangleq \sqrt{1 - \frac{\sqrt{8\bar{\delta}_n + 1} - 1}{4\bar{\delta}_n}} < 1, t \in [0, \tau_{\max}) \quad (41)$$

$$|\hat{\Xi}_n| \leq \hat{\Xi}_n^* \triangleq \Xi_n + \sqrt{\frac{2\gamma_n \bar{\delta}_n}{c_n \varrho_n}}, t \in [0, \tau_{\max}) \quad (42)$$

where  $\bar{\delta}_n = \mathcal{L}_n(0) + \bar{F}_n \bar{\sigma}$  and  $\Xi_n = \frac{\bar{F}_n}{c_n \varrho_n}$  with  $\varrho_n = \frac{\psi_n}{\kappa_{n,0}}$ .

Consequently, one can obtain that  $\zeta_n \in [-\bar{\zeta}_n, \bar{\zeta}_n] \subseteq (-1, 1)$ . Following reasonings similar to (36)–(37), the boundedness of  $u$ , and  $\dot{u}$  can be achieved on the time interval  $[0, \tau_{\max})$ . Therefore, all closed-loop signals, including states  $x_i$  in (18),  $i = 1, \dots, n$ , intermediate control laws  $\alpha_i$  and their derivatives  $\dot{\alpha}_i$ ,  $i = 1, \dots, n-1$ , and actual control  $u$  are bounded for all  $t \in [0, \tau_{\max})$ . Moreover, from the above analysis, one can conclude that there exists a compact set  $\Theta_{\xi}^+ = [-\bar{\zeta}_1, \bar{\zeta}_1] \times \dots \times [-\bar{\zeta}_n, \bar{\zeta}_n] \times \mathbf{R}^{n \times 1} \subset \Theta_{\xi}$  such that the maximal solution of (22) satisfies  $\xi(t) \in \Theta_{\xi}^+$  for all  $t \in [0, \tau_{\max})$ . This contradicts the argument of [29, pp. 481 Proposition C. 3.6] (i.e., there exists a time instant  $t^* \in [0, \tau_{\max})$  such that  $\xi(t^*) \notin \Theta_{\xi}^+$ ), which implies that  $\tau_{\max} = +\infty$ . Therefore, all closed-loop signals are bounded and  $\xi(t) \in \Theta_{\xi}^+ \cup \Theta_{\xi}$  for all  $t \geq 0$ , and  $|e_i(t)| < \kappa_i(t)$ ,  $i = 1, \dots, n$ , holds for all  $t \geq 0$ . In addition, it can be concluded from (32) and (37) that  $\int_0^t k_i \underline{H}_i \varpi_i^2(s) ds \leq \bar{\delta}_i$  holds and  $|\dot{\varpi}_1|$  is bounded, respectively. This implies that  $\lim_{t \rightarrow +\infty} \varpi_1(t) = 0$  according to Barbalat lemma [24], which eventually implies  $\lim_{t \rightarrow +\infty} e_1(t) = 0$ . This completes the proof. ■

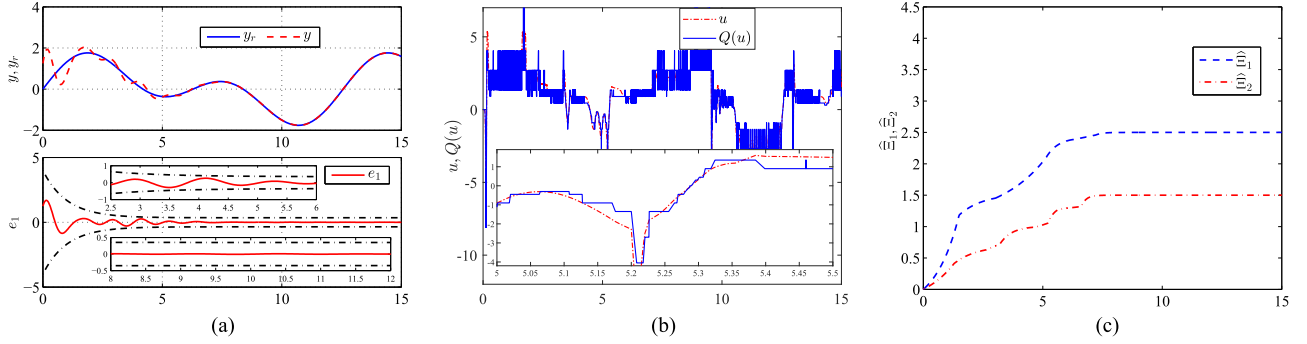


Fig. 1. Numerical Example: (a) Evolution of  $y$ ,  $y_r$ , and  $e_1$ ; (b) Evolution of the actual control signal  $u$  and the quantized control signal  $Q(u)$ ; (c) Evolution of  $\hat{\Xi}_1$  and  $\hat{\Xi}_2$ .

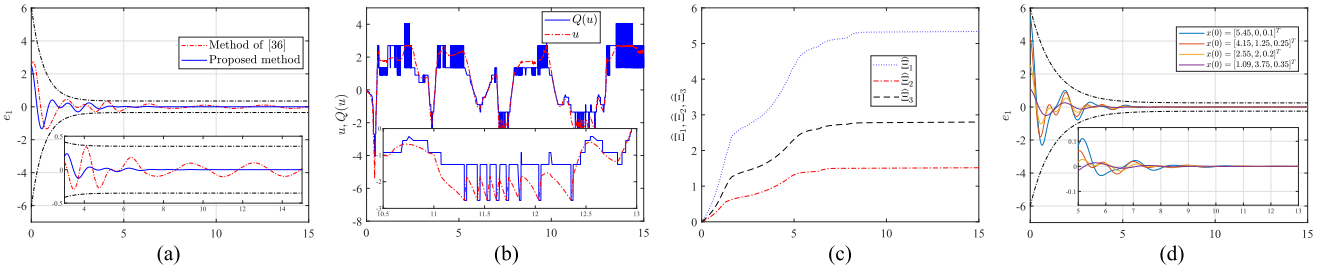


Fig. 2. Practical Example: (a) Evolution of tracking error  $e_1$  under two schemes; (b) Evolution of the actual control signal  $u$  and the quantized control signal  $Q(u)$ ; (c) Evolution of adaptation parameters  $\hat{\Xi}_1$ ,  $\hat{\Xi}_2$ , and  $\hat{\Xi}_3$ ; (d) Evolution of tracking error  $e_1$  under four different sets of initial conditions.

*Remark 5:* Barrier Lyapunov functions have been used in the literature [30]–[34] for constraints satisfaction, whereas the barrier Lyapunov function (23) in our design serves to transform the unknown system nonlinearities in (1) to some known but bounded terms [cf. (29) and (40)]. Then, these terms are compensated by adaptation laws [cf. (30)–(31)] without imposing growth conditions on system nonlinearities (such as [4, Assumption 2], [5, Assumption 2], [6, Assumption 2], [7, Assumption 2], [8, Assumption 1], [9, Assumption 1], [10, Assumption 1], [11, Assumption 1], [14, Assumption 3], and [15, Assumptions 1 and 3]) and without universal approximators.

*Remark 6:* The main innovation of Lemma 5 is to allow handling the control terms in a linear-like manner [cf. (27) and (38)]. With this tool, Theorem 1 shows that prescribed performance asymptotic tracking can be achieved for the challenging class of dynamics (1).

## V. SIMULATIONS

### A. Numerical Example

To illustrate the validity of the proposed control method, consider the following dynamics:

$$\begin{cases} \dot{x}_1 = 2.5x_1^2 \cos(x_1) + (1.5 + \sin(x_1))x_2^{\sin(x_1)} \\ \dot{x}_2 = 1.25 \sin(x_1 x_2) + (2.5 - \cos(x_1 x_2))Q(u) \\ y = x_1 \end{cases} \quad (43)$$

with desired trajectory  $y_r(t) = \sin(t) + \sin(0.5t)$  and initial conditions  $[x_1(0), x_2(0)]^T = [1.25, 0.25]^T$ . We select the prescribed performance functions  $\kappa_i(t) = (4 - 0.35) \exp(-t) + 0.35$ ,  $i = 1, 2$ , the quantizer parameters  $v_{\min}^+ = 0.025$ ,  $v_{\min}^- = -0.035$ ,  $\varrho_+ = 0.2$  and  $\varrho_- = 0.25$ , and the design parameters  $k_1 = 1.5$ ,  $k_2 = 2.5$ ,  $c_1 = 3$ ,  $c_2 = 3.5$ ,  $\gamma_1 = 1.75$ ,  $\gamma_2 = 1.5$ ,  $\bar{\epsilon}_1 = 0.275$ , and  $\bar{\epsilon}_2 = 0.75$ . The initial conditions of adaptive parameters are set as  $\hat{\Xi}_1(0) = \hat{\Xi}_2(0) = 0$ . The

TABLE I  
MACA FOR THREE DIFFERENT SETS OF INITIAL CONDITIONS

$x(0)$ \ Signal	$u_M$	$Q(u)_M$	$u_M - Q(u)_M$
[1.25, 0.25]	2.8631	2.4767	↓ 0.3864
[2.75, -1.75]	2.9743	2.5132	↓ 0.4611
[-2.25, 3.25]	3.0124	2.6659	↓ 0.3465

positive function  $\sigma(\cdot)$  is chosen as  $\sigma(t) = \frac{1}{0.15 + 2t^4}$ . The simulation results are shown in Fig. 1. Fig. 1(a) reveals that the system output  $y$  tracks the desired trajectory  $y_r$  asymptotically, while ensuring that output tracking error  $e_1$  evolves within the prescribed performance interval  $(-\kappa_1(t), \kappa_1(t))$  all the time. Fig. 1(b) depicts the evolution of the actual control signal  $u$  and of the quantized control  $Q(u)$ . Notably, asymptotic tracking is achieved in spite of quantized information. Compared with bounded tracking for similar dynamics, e.g., [35], the output of the quantizer of Fig. 1(b) seems to require higher bandwidth. This is expected since asymptotic tracking results for other input-quantized dynamics, e.g., strict-feedback dynamics [21] and [23] have shown that asymptotic tracking may require faster inputs. Fig. 1(c) shows the evolution of adaptation parameters  $\hat{\Xi}_1$  and  $\hat{\Xi}_2$ . To further investigate the effect of the quantizer, the mean absolute control actions (MACA)  $\frac{1}{T} \int_0^T |u|$  and  $\frac{1}{T} \int_0^T |Q(u)|$  for three different sets of initial conditions are given in Table I, where  $u_M$  and  $Q(u)_M$ , respectively, represent the MACA of  $u$  and  $Q(u)$  (the latter resulting slightly smaller than the former).

### B. Practical Example

A poppet valve is one of the most common components in hydraulic systems [13]. It is typically used to control the timing and quantity of gas or vapor flow into an engine, and its behavior can be modeled by the

TABLE II  
MACA FOR FOUR DIFFERENT SETS OF INITIAL CONDITIONS

Signal $x(0)$	$u_M$	$Q(u)_M$	$u_M - Q(u)_M$
[5.45, 0, 0.1]	2.3653	2.0125	↓ 0.3528
[4.15, 1.25, 0.25]	2.1134	1.9269	↓ 0.1867
[2.55, 2, 0.2]	2.0863	1.7267	↓ 0.3596
[1.09, 3.75, 0.35]	1.9867	1.6235	↓ 0.3632

annular leakage equation. According to [13, pp. 54], the input force  $F$  drives the poppet to move for regulating the volumetric flow rate  $Q_{vol} = \lambda c^3$  of oil from the high-pressure to the low-pressure chamber, where  $\lambda = \frac{\pi r}{6\mu L} \Delta P$  is a lumped coefficient,  $c = \alpha y$  is the effective clearance of the annular passage with  $\alpha$  a constant and  $y$  the displacement of poppet, and where  $r$ ,  $\mu$ , and  $L$  are constants independent of the axial motion of poppet, and  $\Delta P$  is the pressure drop between two chambers. The dynamics of oil volume  $V$  in upper chamber is given by

$$\dot{V}(t) = Q_{vol} - R(t) \quad (44)$$

where  $R$  is the lumped reduction rate of oil attributed to consumption and other leakages. The equation of motion of the poppet is

$$m\ddot{y}(t) = -k\dot{y}(t) + T(t) + F(t) \quad (45)$$

where  $m$  is the mass of the poppet,  $k$  is the viscous friction coefficient,  $T$  is the lumped elastic force, and  $F$  is the input force. At this point, let us introduce the following notation substitutions:

$$x_1 = V, \quad x_2 = y, \quad x_3 = \dot{y}, \quad u = F. \quad (46)$$

Then, the dynamics of systems (46) becomes

$$\dot{x}_1 = \phi_1 + \psi_1 x_2^3, \quad \dot{x}_2 = x_3, \quad \dot{x}_3 = \phi_3 + \psi_3 Q(u) \quad (47)$$

where  $\psi_1 = \lambda \alpha^3$ ,  $\phi_1 = -R$ ,  $\psi_3 = \frac{1}{m}$ , and  $\phi_3 = \frac{1}{m}(T - kx_3)$ . We take the desired trajectory  $y_r(t) = \sin(t) + \sin(0.5t)$  and initial conditions  $[x_1(0), x_2(0), x_3(0)]^T = [2.5, 1.5, -0.75]^T$ . We take  $m = 7.5\text{kg}$ ,  $k = 2.5\text{N/m}$ ,  $R = 5\text{L/min}$ ,  $\Delta P = 10\text{N/m}^2$ ,  $T = 5\text{N}$ ,  $\mu = 2.5$ ,  $L = 5$ ,  $r = 1.25$ ,  $\alpha = 4.5$ , and the prescribed performance function defined by  $\kappa_i(t) = (6 - 0.25) \exp(-t) + 0.25$ ,  $i = 1, 2, 3$ , the quantizer parameters  $v_{\min}^+ = 0.25$ ,  $v_{\min}^- = -0.05$ ,  $\varrho_+ = 0.2$  and  $\varrho_- = 0.25$ , and the design parameters  $k_1 = 5$ ,  $k_2 = 3.5$ ,  $k_3 = 15$ ,  $c_1 = 2.5$ ,  $c_2 = 5$ ,  $c_3 = 10$ ,  $\gamma_1 = 1.25$ ,  $\gamma_2 = 0.75$ ,  $\gamma_3 = 1.5$ ,  $\bar{\epsilon}_1 = 0.5$ ,  $\bar{\epsilon}_2 = 0.25$ , and  $\bar{\epsilon}_3 = 0.75$ . The initial conditions of adaptive parameters are set as  $\hat{\Xi}_1(0) = \hat{\Xi}_2(0) = \hat{\Xi}_3(0) = 0$ . The integral function  $\sigma(\cdot)$  is chosen as  $\sigma(t) = \frac{1}{0.25+t^4}$ . The simulation results are shown in Fig. 2, where the standard PPC approach as in [36] is taken as a means of comparison. Fig. 2(a) shows that the proposed approach exhibits asymptotic tracking differently from the standard PPC approach. Fig. 2(b) and (c) shows the profiles of the control signal  $u$  and the quantized control signal  $Q(u)$ , and adaptation parameters  $\hat{\Xi}_1$ ,  $\hat{\Xi}_2$ , and  $\hat{\Xi}_3$ , respectively. Fig. 2(d) shows that the proposed method achieves asymptotic tracking for different initial conditions, despite quantized information and even with reduced control effort in terms of MACA (cf. Table II).

## VI. CONCLUSION

This article has addressed asymptotic tracking for uncertain high-order odd-rational-power nonlinear systems without imposing growth restrictions on the nonlinearities. The proposed result extends the class of dynamics for which asymptotic tracking is possible with minimum knowledge of the system dynamics. In line with [37], an interesting open problem deserving future investigation is to further reduce the knowledge of the system dynamics by considering completely unknown control directions.

## APPENDIX

*Proof of Lemma 5:* The aim is to first find an upper and lower bound in the form

$$\begin{aligned} & (\underline{\vartheta}(x_1, x_2)x_1^p + \underline{\mu}(x_1, x_2)x_2^p)^{\frac{1}{q}} \\ & \leq (x_1 + x_2)^{\frac{p}{q}} \leq (\bar{\vartheta}(x_1, x_2)x_1^p + \bar{\mu}(x_1, x_2)x_2^p)^{\frac{1}{q}} \end{aligned} \quad (48)$$

for some appropriately bounded functions  $\underline{\mu}(\cdot, \cdot)$ ,  $\underline{\vartheta}(\cdot, \cdot)$ ,  $\bar{\mu}(\cdot, \cdot)$ , and  $\bar{\vartheta}(\cdot, \cdot)$ . Using the binomial theorem [38, Sec. 3.1, page 10], the following inequalities can be derived for  $\forall x_1, x_2 \in \mathbf{R}$ :

$$\begin{aligned} (x_1 + x_2)^{\frac{p}{q}} & \leq \left( x_1^p + x_2^p + \sum_{k=1}^{p-1} \binom{p}{k} |x_1|^k |x_2|^{p-k} \right)^{\frac{1}{q}} \\ & \leq \left( x_1^p + x_2^p + \sum_{k=1}^{p-1} \left( \frac{k}{p} \varepsilon^{\frac{p}{k}} |x_1|^p + \frac{p-k}{p} \binom{p}{k} \varepsilon^{\frac{-p}{p-k}} |x_2|^p \right) \right)^{\frac{1}{q}} \\ & \leq \left( x_1^p + x_2^p + \sum_{k=1}^{p-1} \varepsilon_k |x_1|^p + \sum_{k=1}^{p-1} \omega_k |x_2|^p \right)^{\frac{1}{q}} \\ & \leq ([1 + \bar{\epsilon} \cdot \text{sign}(x_1)] x_1^p + [1 + \omega \cdot \text{sign}(x_2)] x_2^p)^{\frac{1}{q}} \end{aligned} \quad (49)$$

where the second inequality relies on Lemma 4, and where  $\varepsilon_k = \frac{k}{p} \varepsilon^{\frac{p}{k}}$ ,  $\omega_k = \frac{p-k}{p} \binom{p}{k} \varepsilon^{\frac{-p}{p-k}}$ ,  $\omega = \sum_{k=1}^{p-1} \omega_k$ , and  $\bar{\epsilon} = \sum_{k=1}^{p-1} \varepsilon_k$  can be made to satisfy  $0 < \bar{\epsilon} < 1$  by appropriately selecting the small positive constant  $\varepsilon$ .

A lower bound will be sought along the following three situations.

*Situation 1:* When  $x_1 < 0$  and  $x_1 + x_2 \geq 0$ , we immediately have  $(x_1 + x_2)^{\frac{p}{q}} \geq 0 \geq x_1^{\frac{p}{q}}$  as  $p$  is a positive odd integer.

*Situation 2:* When  $x_1 < 0$  and  $x_1 + x_2 < 0$ , it follows that:

$$\begin{aligned} & (x_1^p + x_2^p)^{\frac{1}{q}} = \\ & 2^{\frac{1}{q}} \left[ \sum_{m=1}^{\frac{p-1}{2}} \binom{p}{2m-1} \underbrace{\left( \frac{x_1 + x_2}{2} \right)^{2m-1}}_{<0} \underbrace{\left( \frac{x_1 - x_2}{2} \right)^{p-2m+1}}_{>0} \right. \\ & \left. + \left( \frac{x_1 + x_2}{2} \right)^p \right]^{\frac{1}{q}} \leq 2^{\frac{1-p}{q}} (x_1 + x_2)^{\frac{p}{q}} \end{aligned} \quad (50)$$

which indicates that  $(x_1 + x_2)^{\frac{p}{q}} \geq (2^{p-1} x_1^p + 2^{p-1} x_2^p)^{\frac{1}{q}}$ .

*Situation 3:* When  $x_1 \geq 0$  and  $x_2 \in \mathbf{R}$ , then following similar derivations to (48), it holds that  $(x_1 - x_2)^{\frac{p}{q}} = [x_1 + (-x_2)]^{\frac{p}{q}} \leq ([1 + \bar{\epsilon} \cdot \text{sign}(x_1)] x_1^p - [1 - \omega \cdot \text{sign}(x_2)] x_2^p)^{\frac{1}{q}}$ . Besides, note that  $(x_1 + x_2)^p + (x_1 - x_2)^p = 2[x_1^p + x_2^p]$ . Thus, we have  $(x_1 + x_2)^{\frac{p}{q}} \geq ([1 - \bar{\epsilon} \cdot \text{sign}(x_1)] x_1^p + [1 + \omega \cdot \text{sign}(x_2)] x_2^p)^{\frac{1}{q}}$ .

Having derived all the upper and lower bounds in the form of (48), we conclude that the equality  $[x_1^p \vartheta(x_1, x_2) + x_2^p \mu(x_1, x_2)]^{\frac{1}{q}} = (x_1 + x_2)^{\frac{p}{q}}$  holds for any  $x_1, x_2$ , for some function  $\vartheta(\cdot, \cdot) \subseteq [1 - \bar{\epsilon}, \max\{1 + \bar{\epsilon}, 2^{p-1}\}]$  with  $\bar{\epsilon}$  being a constant that can be made to take value in  $(0, 1)$  by selecting an appropriately small constant  $\varepsilon$ , and  $|\mu(\cdot, \cdot)| \leq \bar{v}$  with  $\bar{v} = \max\{1 + \omega, 2^{p-1}\}$  a positive constant that is independent of  $x_1$  and  $x_2$ . This completes the proof. ■



## REFERENCES

- [1] C. Rui, M. Reyhanoglu, and I. Kolmanovsky, "Nonsmooth stabilization of an underactuated unstable two degrees of freedom mechanical system," in *Proc. 36th Conf. Decis. Control*, San Diego, CA, USA, 1997, pp. 3998–4003.
- [2] W. Lin and C. Qian, "Adding one power integrator: A tool for global stabilization of high-order lower-triangular systems," *Syst. Control Lett.*, vol. 39, pp. 339–351, Apr. 2000.
- [3] Z. G. Liu, L. R. Xue, W. Sun, and Z. Y. Sun, "Robust output feedback tracking control for a class of high-order time-delay nonlinear systems with input dead-zone and disturbances," *Nonlinear Dyn.*, vol. 97, pp. 921–935, May 2019.
- [4] F. Z. Li and Y. G. Liu, "Global practical tracking with prescribed transient performance for inherently nonlinear systems with extremely severe uncertainties," *Sci. China Inf. Sci.*, vol. 62, pp. 1–16, Feb. 2019.
- [5] Z. Y. Sun, T. Li, and S. H. Yang, "A unified time varying feedback approach and its applications in adaptive stabilization of high-order uncertain nonlinear systems," *Automatica*, vol. 70, pp. 249–257, Aug. 2016.
- [6] C. C. Chen and Z. Y. Sun, "A unified approach to finite-time stabilization of high-order nonlinear systems with an asymmetric output constraint," *Automatica*, vol. 111, Jan. 2020, Art. no. 108581. [Online]. Available: <https://www.sciencedirect.com/science/article/abs/pii/S000510981930442X>
- [7] Z. Y. Sun, C. H. Zhang, and Z. Wang, "Adaptive disturbance attenuation for generalized high-order uncertain nonlinear systems," *Automatica*, vol. 80, pp. 102–109, Jun. 2017.
- [8] Z. G. Liu and Y. Q. Wu, "Universal strategies to explicit adaptive control of nonlinear time-delay systems with different structures," *Automatica*, vol. 89, pp. 151–159, Jan. 2018.
- [9] Z. Y. Sun, Y. Y. Dong, and C. C. Chen, "Global fast finite-time partial state feedback stabilization of high-order nonlinear systems with dynamic uncertainties," *Inf. Sci.*, vol. 484, pp. 219–236, Jan. 2019.
- [10] Z. Y. Sun, Y. Shao, and C. C. Chen, "Fast finite-time stability and its application in adaptive control of high-order nonlinear system," *Automatica*, vol. 106, pp. 339–348, Aug. 2019.
- [11] Z. Y. Sun, L. R. Xue, and K. M. Zhang, "A new approach to finite-time adaptive stabilization of high-order uncertain nonlinear system," *Automatica*, vol. 58, pp. 60–66, Aug. 2015.
- [12] C. C. Chen and G. S. Chen, "A new approach to stabilization of high-order nonlinear systems with an asymmetric output constraint," *Int. J. Robust Nonlinear Control*, vol. 30, pp. 756–775, Jan. 2020.
- [13] N. D. Manning and R. C. Fales, *Hydraulic Control Systems*. New York, NY, USA: Wiley, 2019.
- [14] S. J. Yoo, "Simplified global fault accommodation control design of uncertain nonlinear systems with unknown time-varying powers," *Nonlinear Dyn.*, vol. 99, no. 2, pp. 1115–1128, Jan. 2020.
- [15] Y. Man and Y. Liu, "Global adaptive stabilization and practical tracking for nonlinear systems with unknown powers," *Automatica*, vol. 100, pp. 171–181, Feb. 2019.
- [16] Y. Li, K. Li, and S. Tong, "Adaptive neural network finite-time control for multi-input and multi-output nonlinear systems with positive powers of odd rational numbers," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 31, no. 7, pp. 2532–2543, Jul. 2020.
- [17] L. N. Bikas and G. A. Rovithakis, "Combining prescribed tracking performance and controller simplicity for a class of uncertain MIMO nonlinear systems with input quantization," *IEEE Trans. Autom. Control*, vol. 64, no. 3, pp. 1228–1234, Mar. 2019.
- [18] A. Theodorakopoulos and G. A. Rovithakis, "Guaranteeing preselected tracking quality for uncertain strict-feedback systems with deadzone input nonlinearity and disturbance via low-complexity control," *Automatica*, vol. 54, pp. 135–145, Apr. 2015.
- [19] J. X. Zhang and G. H. Yang, "Prescribed performance fault-tolerant control of uncertain nonlinear systems with unknown control directions," *IEEE Trans. Autom. Control*, vol. 62, no. 12, pp. 6529–6535, Dec. 2017.
- [20] Y. H. Liu and H. Y. Li, "Adaptive asymptotic tracking using barrier functions," *Automatica*, vol. 98, pp. 239–246, Dec. 2018.
- [21] G. Y. Lai, Z. Liu, C. L. P. Chen, and Y. Zhang, "Adaptive asymptotic tracking control of uncertain nonlinear system with input quantization," *Syst. Control Lett.*, vol. 96, pp. 23–29, Oct. 2016.
- [22] J. Zhou, C. Wen, and G. Yang, "Adaptive backstepping stabilization of nonlinear uncertain systems with quantized input signal," *IEEE Trans. Autom. Control*, vol. 59, no. 2, pp. 460–464, Feb. 2014.
- [23] Y. Li and G. Yang, "Adaptive asymptotic tracking control of uncertain nonlinear systems with input quantization and actuator faults," *Automatica*, vol. 72, pp. 177–185, Jul. 2016.
- [24] W. Wang, C. Wen, and J. Huang, "Distributed adaptive asymptotically consensus tracking control of nonlinear multi-agent systems with unknown parameters and uncertain disturbances," *Automatica*, vol. 77, pp. 133–142, Jan. 2017.
- [25] Y. Li, "Barrier Lyapunov function-based adaptive asymptotic tracking of nonlinear systems with unknown virtual control coefficients," *Automatica*, vol. 121, Nov. 2020, Art. no. 109181. [Online]. Available: <https://www.sciencedirect.com/science/article/abs/pii/S0005109820303794>
- [26] Y. Li, "Command filter adaptive asymptotic tracking of uncertain nonlinear systems with time-varying parameters and disturbances," *IEEE Trans. Autom. Control*, to be published, doi: [10.1109/TAC.2021.3089626](https://doi.org/10.1109/TAC.2021.3089626).
- [27] J. Huang, W. Wang, C. Wen, and J. Zhou, "Adaptive control of a class of strict-feedback time-varying nonlinear systems with unknown control coefficients," *Automatica*, vol. 93, pp. 98–105, Mar. 2018.
- [28] C. P. Bechlioulis and G. A. Rovithakis, "Robust adaptive control of feedback linearizable MIMO nonlinear systems with prescribed performance," *IEEE Trans. Autom. Control*, vol. 53, no. 9, pp. 2090–2099, Oct. 2008.
- [29] E. D. Sontag, *Mathematical Control Theory: Deterministic Finite Dimensional Systems*. Berlin, Germany: Springer-Verlag, 1998.
- [30] C. P. Bechlioulis and G. A. Rovithakis, "Robust partial-state feedback prescribed performance control of cascade systems with unknown nonlinearities," *IEEE Trans. Autom. Control*, vol. 56, no. 9, pp. 2224–2230, Sep. 2011.
- [31] W. Wang, C. Y. Wen, and J. S. Huang, "Distributed adaptive asymptotically consensus tracking control of nonlinear multi-agent systems with unknown parameters and uncertain disturbances," *Automatica*, vol. 77, pp. 133–142, Jan. 2017.
- [32] Y. Liu, C. Sun, and H. Li, "Adaptive output feedback funnel control of uncertain nonlinear systems with arbitrary relative degree," *IEEE Trans. Autom. Control*, vol. 66, no. 6, pp. 2854–2860, Jun. 2021, doi: [10.1109/TAC.2020.3012027](https://doi.org/10.1109/TAC.2020.3012027).
- [33] K. Tee, S. Ge, and E. Tay, "Barrier Lyapunov functions for the control of output-constrained nonlinear systems," *Automatica*, vol. 45, pp. 918–927, Jan. 2009.
- [34] Y. Liu and S. Tong, "Barrier Lyapunov functions for Nussbaum gain adaptive control of full state constrained nonlinear systems," *Automatica*, vol. 76, pp. 143–152, Dec. 2016.
- [35] M. Lv, W. Yu, J. Cao, and S. Baldi, "Consensus in high-power multiagent systems with mixed unknown control directions via hybrid Nussbaum-based control," *IEEE Trans. Cybern.*, to be published, doi: [10.1109/TCYB.2020.3028171](https://doi.org/10.1109/TCYB.2020.3028171).
- [36] C. P. Bechlioulis and G. A. Rovithakis, "A low-complexity global approximation-free control scheme with prescribed performance for unknown pure feedback systems," *Automatica*, vol. 50, no. 4, pp. 1217–1226, Apr. 2014.
- [37] M. Lv, B. De Schutter, C. Shi, and S. Baldi, "Logic-based distributed switching control for agents in power chained form with multiple unknown control directions," *Automatica*, vol. 137, 2022, Art. no. 110143.
- [38] M. Abramowitz and I. A. Stegun, *Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables, 9th printing*. New York, NY, USA: Dover, 1972.