

Quantification of Shading Tolerability for Photovoltaic Modules

Ziar, Hesam; Asaei, Behzad; Farhangi, Shahrokh; Isabella, Olindo; Korevaar, Marc; Zeman, Miro

DOI

[10.1109/JPHOTOV.2017.2711429](https://doi.org/10.1109/JPHOTOV.2017.2711429)

Publication date

2017

Document Version

Accepted author manuscript

Published in

IEEE Journal of Photovoltaics

Citation (APA)

Ziar, H., Asaei, B., Farhangi, S., Isabella, O., Korevaar, M., & Zeman, M. (2017). Quantification of Shading Tolerability for Photovoltaic Modules. *IEEE Journal of Photovoltaics*, 7(5), 1390-1399. Article 7974760. <https://doi.org/10.1109/JPHOTOV.2017.2711429>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

Quantification of Shading Tolerability for Photovoltaic Modules

Hesan Ziar, *Student Member, IEEE*, Behzad Asaei, *Member, IEEE*, Shahrokh Farhangi, *Member, IEEE*,
Marc Korevaar, Olindo Isabella, and Miro Zeman

Abstract— Despite several decades of research in the field of photovoltaic (PV) systems, shading tolerance has still not been properly addressed. PV modules are influenced by shading concerning many factors, such as number and configuration of cells in the module, electrical and thermal characteristics of the cells, number and type of bypass circuits, electrical characteristics of bypass elements, and shading profile features. Along with the random nature of shading profile over the lifetime of a PV system, it is difficult to choose the best module for a location which is most of the time sunny, partly cloudy, or cloudy. This paper suggests a measurable parameter, the so-called Shading Tolerability (ST), to classify PV modules regarding the ability to oppose shading effects. Based on mathematical and probability analysis, the ST parameter is extracted and then measured using a Large Area Steady State Solar (LASSS) simulator. Finally, the results of on-field experiments are presented as a proof for shading quantification method and its significant contribution to Performance Ratio (PR) improvement.

Index Terms— Photovoltaic (PV) technology, partial shading, performance ratio (PR), maximum power point tracking (MPPT), bypass diode

I. INTRODUCTION

The annual growth for photovoltaic installation has been found to be a stunning rate of 44% in the years between 2000 and 2014 [1]. However, quality of the installed PV systems in terms of Performance Ratio (PR) can be further increased. In the 1990's, typical PR of a PV system was about 70% while in 2010's it has touched 90% [2]. The main reason preventing PR from reaching higher-than-90% values is that PV systems are normally designed and evaluated indoors whereas they should work outdoors for years. One of the difficult-to-predict outdoor circumstances is the partial shading, which is responsible of up to 25% PR and, depending on system design and equipment selection, of substantial output energy yield reduction [3-5].

Non-uniform irradiation on PV module surface means shading, which could cause (i) disproportional power loss [6], (ii) hotspot and thermal instability [7], (iii) module aging [8], and even (iv) overcurrent or nuisance trip [9, 10]. The tremendous increase of Building Integrated PV (BIPV) systems and solar roads [11, 12] makes it practically impossible to eliminate the source of static shading (side

buildings, trees, etc.). Besides, there will always be dynamic shading (moving clouds, birds, etc.). The study of shading and its effects started in 1960's and since then several shading tolerability approaches have been proposed by researchers [13-16]. Some of them are now being utilized in PV industry, such as silicon p-n and Schottky bypass diodes, cell integrated bypass diode, cool bypass switch, and IntegraBus technology [17-21]. The issue of shading tolerability of a photovoltaic system can be addressed at photovoltaic level and subsequently at power electronics level.

Cell-, module-, and array-based approaches are categorized in the photovoltaic level, as they aim to reduce negative effects of shading [22-24]. In other words, approaches at photovoltaic level try to harness the produced but unavailable power by providing alternative passes for the blocked current to flow at shading condition. Photovoltaic level approaches influence the current-voltage (I-V) curve of PV array. Then, power electronic converters should track the maximum available power [25]. This is normally done by maximum power point tracking (MPPT) techniques which could be module-based, string-based, or array-based [26]. Approaches aimed to improve hardware and algorithms of MPPT for fast, efficient and accurate MPP tracking are classified in the power electronics level [27, 28]. Photovoltaic and power electronics approaches work in series in a PV plant, as power electronic converters can only track the MPP provided by the approaches at photovoltaic level.

In this context, the proper selection of PV modules is of dominant importance in the PV system design. The right choice is made more challenging when the location of the installation is prone to shading. In modules datasheet, the ability of the modules to oppose shading effects is normally expressed qualitatively. General statements such as: *better shading response* [29], *outstanding low light behavior* [30], *patented bypass circuit* [31], *excellent performance even when partially shaded* [32], and *shade tolerant* [33] may not help the designer to select the most suitable module for a specific location. On the other hand, a quantified parameter, a *number*, which classifies PV modules in terms of shading tolerability, can be more meaningful. The establishment of such a parameter is the goal of this contribution.

The rest of the paper is organized as follows. In section II, theoretical framework is illustrated and mathematical study is performed to precisely formulate the concept of partial shading. Section III proves the mathematics in two measurement stages and confirms the correlation between the proposed Shading Tolerability (ST) parameter and the PR of a PV system. Last section provides an outlook for the usage of proposed ST method and summarizes the results of this paper.

H. Ziar, B. Asaei, and S. Farhangi are with the School of Electrical and Computer Engineering, College of Engineering, University of Tehran, Tehran 14395/515, Iran (e-mail: h.ziar@ut.ac.ir; basaei@ut.ac.ir; farhangi@ut.ac.ir).

M. Korevaar is with the Kipp & Zonen, Delftechpark 36, 2628 XH, Delft, the Netherlands (email: marc.korevaar@kippzonen.com).

O. Isabella, and M. Zeman are with the Photovoltaic Materials and Devices Group, Delft University of Technology, 2628CD Delft, The Netherlands (e-mail: o.isabella@tudelft.nl; m.zeman@tudelft.nl).

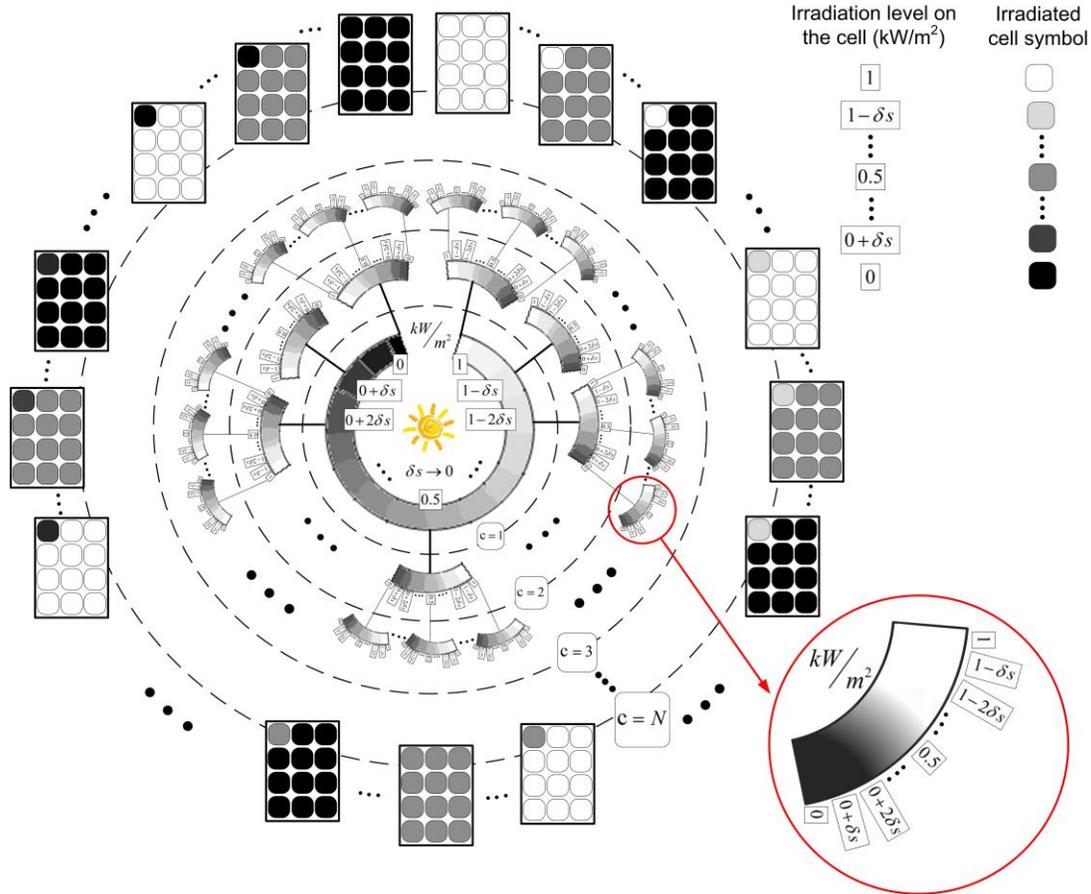


Fig. 1. Circular-tree diagram of sample space for PV modules shading trial. The small letter s represents irradiation levels and δs is the difference value between two consecutive irradiation levels. Since the sample module in the figure has 12 cells, then $c=12$. The outer layer shows a PV module containing 12 cells with possible shading profiles. Since $\delta s \rightarrow 0$, then there will be infinite possible shading profile for the module. Each shading profile has the $\lim_{i \rightarrow \infty} (1/i^c)$ chance to occur.

II. MATHEMATICAL MODELLING OF SHADING PROBLEM

Probability laws provide the proper tools for handling the design of systems that involve randomness [34]. Probability has many applications within electrical engineering (e.g., reliability and device failure rate, noise effect minimization, etc.). Besides, weather forecast is frequently presented in terms of probabilistic variables (e.g., a 30% chance, or probability, of rain). Therefore, shading on PV modules which involves both weather and electrical systems can be seen and studied as a random process in the mathematical framework of probability laws.

A. Sample space development for PV module shading trial

In probability theory, the sample space of a random trial is the collection of all possible events [34]. For PV module shading trial, a major obstacle is the infinite possible shading profiles¹ resulting in an infinitely large sample space. To simplify our shading trial, two sensible assumptions are adopted for a PV module:

- 1) On the surface of a PV cell (encapsulated in a module), irradiation is homogenous and can have any value between 0 and 1 kW/m², and all values of irradiation have an equal chance to occur.

- 2) The chance of shading for different cells of a module is equal and independent from their location in the module or in the array where their module is mounted.

Thus, for a PV module with c cells and i possible irradiation levels, the total number of possible shading profiles is equal to i^c . Since there are infinite numbers of irradiation levels between 0 to 1 kW/m², each unique shading profile has the $\lim_{i \rightarrow \infty} (1/i^c)$ occurring possibility. Fig. 1 shows a circular-tree diagram as graphical illustration of the sample space for shading probability trial. Although the aforementioned assumptions do not reduce the possible number of shading profiles to a finite value, the sample space is now carefully determined².

B. Mathematical expectation of power production at shading

According to probability theory, decision making strictly concerns with mathematical expectation³ [35]. For a PV module, higher mathematical expectation of power production at shading, or higher *shading tolerance*, persuades designers to select that module for, e.g., a cloudy location. Thus, a

² The assumptions ignore irradiance levels above 1 kW/m². This will not affect the model and makes the formulation more understandable.

³ Mathematical expectation, also known as the expected value or expectation is the integration of possible values from a random variable. In other words, it is the product of the probability of an event occurring and the value corresponding with the actual observed occurrence of the event.

¹ Each unique shadow profile makes unique influence on PV module electrical characteristics (I-V).

mathematical expectation value for PV modules is developed in this paper as a benchmark to rate, compare, and select the best module for a specific installation location in terms of cloudiness/shading.

Expected value of a random variable x with the occurring chance of $p(x)$ is obtained by [35]:

$$E(x) = \sum_{k=1}^{\infty} x_k p(x_k) \quad (1)$$

Using (1) the Shading Tolerability of a PV module is defined as:

$$ST_{(i,c)} = \frac{1}{P_{mod_mpp}} \sum_{k=1}^{k=i^c} P_k \left(\frac{1}{i^c} \right) \quad (2)$$

where $ST_{(i,c)}$ stands for shading tolerability. c and i are the total number of PV cells (within the module) and irradiation levels, respectively. P_k corresponds to the MPP at each shading profile (in W), while P_{mod_mpp} is the maximum power of PV module (in W). P_{mod_mpp} normalizes the value of mathematical expectation and makes it possible to compare PV modules with different rated powers. So far, the PV module which gains higher value from equation (2), acts better at shading. However, the value of equation (2) is not measurable experimentally, because of the infinite possible irradiation levels between 0 and 1 kW/m².

C. How to make ST practically measurable

Although equation (2) is not practically measurable for $i \rightarrow \infty$, it is indeed measurable for $i = 2$. If we prove that the module which provides higher ST at $i = 2$ it will also give higher ST at $i \rightarrow \infty$, then $ST_{(i=2,c)}$ can be measured instead of $ST_{(i \rightarrow \infty,c)}$ as a standard for PV module's ability to withstand shading. Fig. 2 illustrates the probability distribution $p(s)$ of irradiance levels (s) from discrete binary distribution ($i = 2$) to uniform continuous distribution ($i \rightarrow \infty$).

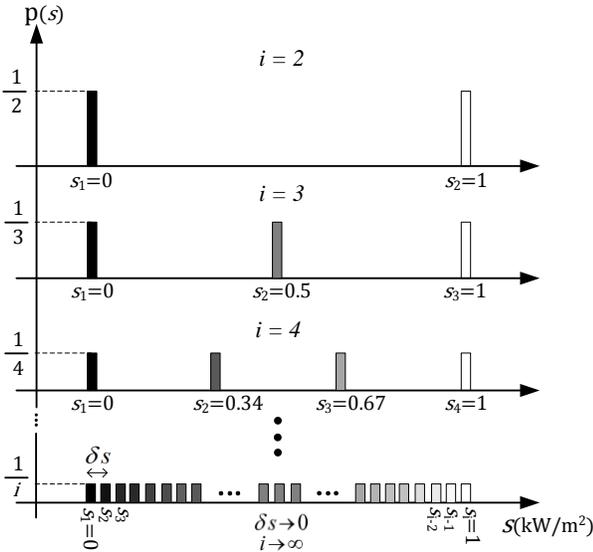


Fig. 2. Probability distributions $p(s)$ of PV module shading problem for different number of irradiation levels i . δs is the difference value between two consecutive irradiation levels.

To find a general equation for $ST_{(i,c)}$, one can obtain $ST_{(i=2,c)}$ (irradiance level is either 0 or 1 kW/m²), $ST_{(i=3,c)}$ (irradiance level is either 0, 0.5, or 1 kW/m²), and continue

this procedure to obtain the equation for $ST_{(i,c)}$. By means of mathematical permutation, the general equation for shading tolerability of PV modules is as follows:

$$ST_{(i,c)} = \left(\frac{m}{c} \right) \left(\frac{1}{i^n} \right) \left[\sum_{k=1}^{k=j} \left(\frac{n}{j} \right) k + \sum_{a=1}^{a=j-1} n \left(\frac{j-a}{j} \right) \sum_{b=1}^{b=n-1} \left(\frac{n}{b} \right) a^{n-b} \right] \quad (3)$$

where n is the number of series-connected PV cells, m is the number of PV cell strings in a module ($c = n \times m$), and $j = i-1$. In equation (3), where its mathematical demonstration can be found in Appendix A, the first series term corresponds to the shading profiles in which all cells receive the same amount of irradiation, while the second term stands for the shading profiles with non-uniform irradiation. Equation (3) shows that the shading tolerability of a PV module is independent from the number of PV cell strings (i.e. independent from m). In fact, using fix-point numerical calculation method [36], one can demonstrate that as $i \rightarrow \infty$, equation (3) converges to $I / (n+1)$. Remarkably, this means that the shading tolerability of a PV module is inversely proportional to the factor of $(n+1)$. Such result can be also extended to array level, $ST_{Array} = ST_{Module} / (q+1)$, where q indicates the number of series connected PV modules ($q > 1$) in an array (see Appendix B). For instance, a PV array formed by 8×3 PV modules is 28.6% more vulnerable to shading than a 6×4 PV array configured with the same PV modules ($(8+1) \div (6+1) = 1.286$).

$ST_{(i=2,c)}$ is a special case of equation (3). Simply, by substituting $i = 2$ in equation (3):

$$ST_{(i=2,c)} = \left(\frac{1}{2^n} \right). \quad (4)$$

Considering both equations (3) and (4), it is easy to comprehend that when $ST_{(i=2,c)}$ is higher for module₁ than for module₂, then $n_1 < n_2$ which results in higher $ST_{(i \rightarrow \infty,c)}$ for module₁ than module₂. In other words:

$$ST_{(i=2,c)}^{(module_1)} > ST_{(i=2,c)}^{(module_2)} \Rightarrow ST_{(i \rightarrow \infty,c)}^{(module_1)} > ST_{(i \rightarrow \infty,c)}^{(module_2)}. \quad (5)$$

Equation (5) shows that ST can be measured for $i = 2$ and used instead of ST for $i \rightarrow \infty$. However, equation (3) may not fully guarantee that testing PV modules for $i = 2$ condition in laboratory can stand for shading tolerability for $i \rightarrow \infty$ in real outdoor circumstances. The reason is, different modules come with different approaches to oppose shading (such as number and type of bypass circuits) while equation (3) only considers PV cells and their series-parallel configuration in a module. All the approaches which contribute to shading tolerability enhance the value of ST . Therefore, a coefficient, $\lambda_{(i,c)}$ is defined for equation (3) to model the facilities that the manufacturer has used to make the module more tolerable to shade. Since λ may vary by number of cells in a module and number of possible irradiation levels on the surface of a cell, it is defined as function of i and c . By considering this coefficient, the final general equation for shading tolerability of a PV module is written as follows:

$$ST_{(i \rightarrow \infty,c)} = \lambda_{(i \rightarrow \infty,c)} \left(\frac{1}{n+1} \right) \quad (6)$$

where λ depends on the PV module's design and manufacturing. Obtaining a general equation for $\lambda_{(i,c)}$ is

difficult because each module has its own way to oppose shading effects and an approach's effectiveness may vary by irradiation distribution and number of cells. However, it is possible to find the boundaries of $\lambda_{(i,c)}$. Its minimum value is 1, meaning that the adopted shading tolerability approach has no influence on the PV module performance. The maximum of $\lambda_{(i,c)}$ means that the shaded cells in a module have no effects on the performance of sunny cells. Simply stated, the cells can produce energy independently. Now, the maximum $ST_{(i \rightarrow \infty, c)}$ for a single cell is equal to 1/2 because average irradiation on a cell is 0.5 kW/m^2 (at any uniform probability distribution depicted in Fig. 2). Hence, for a PV module in which solar cells work independently, the maximum $ST_{(i \rightarrow \infty, c)}$ is also equal to 1/2. For example, when probability distribution of irradiation matches the subplot $i=3$ in Fig. 2, for a single PV cell the maximum ST is equal to: $ST_{(i=3, c=1)} = (1/P_{cell}) \times (1/3^1) \times (0+0.5+1) \times P_{cell} = 0.5$, and for a module with two PV cells the maximum ST is also equal to: $ST_{(i=3, c=2)} = (1/(2 \times P_{cell})) \times (1/3^2) \times (0+0.5+0.5+1+1+1+1.5+1.5+2) \times P_{cell} = 0.5$. By substituting $ST_{(i \rightarrow \infty, c)} = 1/2$ in equation (6), the boundaries of $\lambda_{(i,c)}$ are obtained as:

$$1 \leq \lambda_{(i \rightarrow \infty, c)} \leq \frac{n+1}{2}. \quad (7)$$

When the function of $\lambda_{(i,c)}$ is determined, then it is possible to mathematically investigate whether it is correct to measure $ST_{(i=2, c)}$ instead of $ST_{(i \rightarrow \infty, c)}$ for all type of modules or not. Since there is no immediate way to model $\lambda_{(i,c)}$ mathematically for different commercial PV modules, this paper investigates the correctness of equation (5) through experiments in the next section.

III. EXPERIMENTAL WORK

The experiments measure the value of $ST_{(i=2, c)}$ for various commercial PV modules through indoor tests. After extracting the quantified value of shading tolerability for each module, some of them are chosen to be tested under real outdoor condition (as a circumstance in which $i \rightarrow \infty$). Afterwards, based on gathered experimental data, correctness of equation (5) is investigated.

A. Indoor Measurements

To cover a wide range of PV markets, various PV modules with different technologies, number of cells and bypass techniques, were selected. In the experiments, c is six for all modules. It means that the active area of each PV module has been divided into six parts, proportional to the size of that PV module. The reason for selection of $c = 6$ is that for higher values of c , the number of required tests (and subsequently required measurement time and energy) for each single module increases exponentially (number of tests = 2^c) and reduces the chance of industrial application of ST . Besides, six is an even number, which makes it easy to divide module's length and width into three times two sections. Note that although PV modules come in a variety of shapes, the most common is the rectangular one [37]. All $2^6 = 64$ shading profiles, as shown in Fig. 3, have been applied to each selected module and I-V characteristics of the modules have been measured for each case using an EternalSun Large Area Steady State Solar (LASSS) AAA-class simulator. Every single test has been performed at 1 kW/m^2 , AM 1.5, and 25°C . It is worth pointing out that 25°C is the imposed ambient temperature instead of the module temperature. The reason is

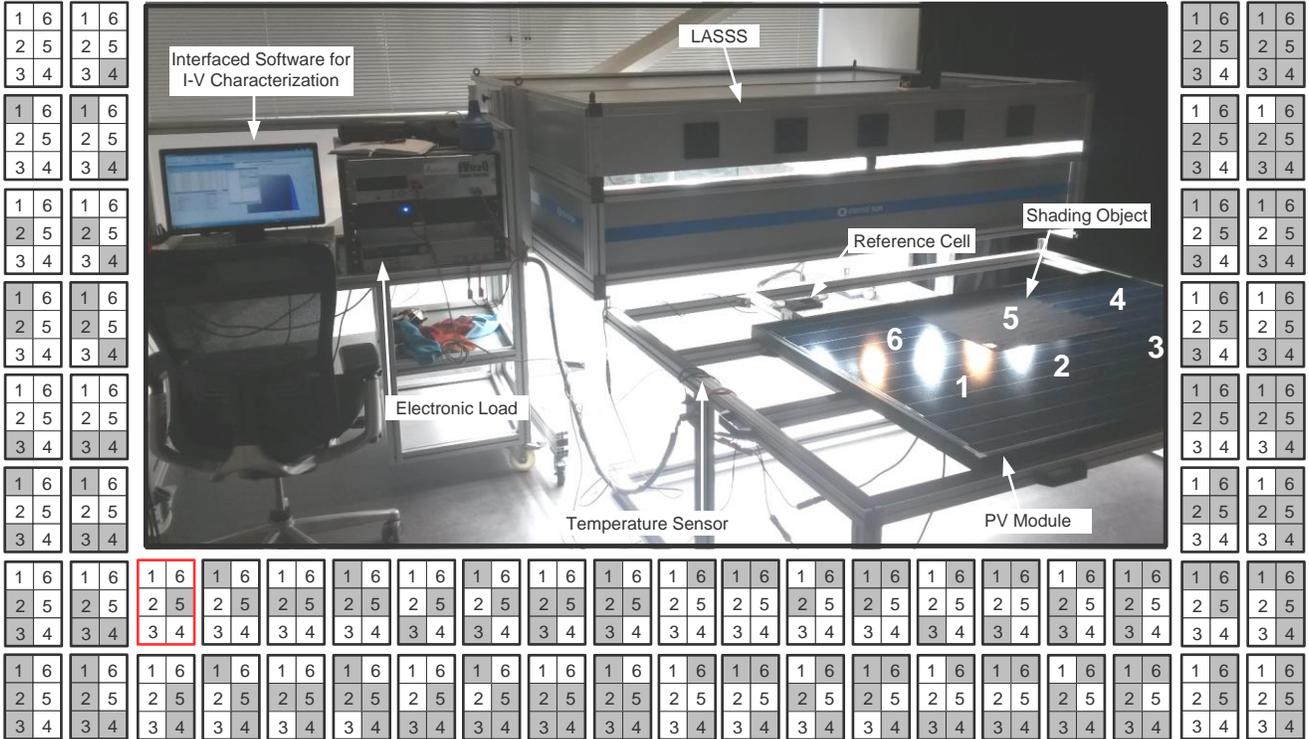


Fig. 3. Indoor experimental setup for testing shading tolerability along with 64 shading profile codes from 000000 to 111111. The depicted module under test (#4, see Table I) has 54 cells and is divided into 6 sections. The 010000 shading profile code is shown in the figure. In the figure, sections 1, 2, 3, 4, and 6 are about to receive rated irradiation (1000 W/m^2) while section 5 is shaded and receives 250 W/m^2 . The shading object for this specific module shades simultaneously 9 cells.

that shading causes hotspot and power dissipation in the module, resulting in temperature rise. In such a condition, some modules perform better some worse. Therefore, in this special test, keeping the modules temperature fixed would cause inaccuracy. Moreover, because of various shading profiles, the temperature varies significantly within the area of the module which makes it difficult to keep the temperature of whole module stable and uniform.

Shading profiles are coded in a binary format as a representative for applied discrete irradiation. Since shadows

in real condition are not perfectly dark (caused by diffuse irradiation), a dark material which passes 1/4 of the received irradiation (250 W/m^2) has been chosen as shading object. It is worth mentioning that total indoor measurement time for all eleven modules was about 63.11 hours, average of 5.73 hours for each module (including data saving and exportation).

Datasheet information of the tested PV modules together with corresponding obtained ST s and $\%ST$ s are given in Table I. To obtain $\%ST$, defined as the percentage value of ST , measured ST from equation (2) were divided by the

TABLE I
DETAILED SPECIFICATION OF TESTED PV MODULES AND CORRESPONDING MEASUREMENT RESULTS

	Company/ Commercial Name	Technology	Electrical specification	Mechanical size Weight Flexibility	Notes on module's datasheet regarding shading tolerance	Measured $ST^{(\#)}$	Percentage value of $ST^{(\#)}$	Suggested Shading Class Symbol
1	Neste/ Module PV A12	a-Si	MPP=7.5 W Voc=22 V Vmpp=15 V Isc=0.6 A Imp=0.5 A Bypass diodes: None Total 29 cells-one string	614×309×22 mm ³ 3.0 kg (Rigid)	None	0.36	58%	 Partly-cloudy
2	Victron Energy/ SPM30-12	Mono c-Si	MPP= 30 W Voc= 22.5 V Vmpp= 18 V Isc=2 A Imp=1.67 A Bypass: One silicon p-n diode Total 36 cells-one string	450×540×25 mm ³ 2.5 kg (Rigid)	None	0.24	38%	 Sunny
3	Würth Solar/ GeneCIS module 80W	CIS	MPP=80 W Voc=44 V Vmpp=35 V Isc=2.5 A Imp=2.29 A Bypass: One silicon p-n diode Total 132 cells- two parallel strings	605×1205×35 mm ³ 12.7 kg (Rigid)	<i>Optimum energy yield through outstanding temperature and low light behavior</i>	0.57	91%	 Cloudy
4	Scheuten/ Multisol P6-54 series 200	Poly c-Si	MPP=200 W Voc=33 V Vmpp=25.9 V Isc=8.22 A Imp=7.71 A Bypass: Three Schottky diodes Total 54 cells-one string	1500×1000×42 mm ³ 20.0 kg (Rigid)	<i>Junction box with patented connection system and 3 bypass diodes</i>	0.22	35%	 Sunny
5	Calyxo/ CX3-77 Thin film solar module	CdTe/CdS	MPP=77.5 W Voc=62.5 V Vmpp=46.7 V Isc=1.98 A Imp=1.68 A Bypass diodes: None Total 156 cells-two parallel strings	1200×600×6.9 mm ³ 12.0 kg (Rigid)	None	0.39	63%	 Partly-cloudy
6	SunPower/ SPR X20 327-BLK	Mono c-Si	MPP=327 W Voc=67.6 V Vmpp=57.3 V Isc=6.07 A Imp=5.71 A Bypass: Three silicon p-n diodes Total 96 cells-one string	1559×1046×46 mm ³ 18.6 kg (Rigid)	<i>Designed to deliver the most energy in partial shade and hot rooftop temperatures</i>	0.21	33%	 Sunny
7	Masdar PV/ MPV-T	Tandem a-Si/a-Si	MPP=109.81 W Voc=137.54 V Vmpp=107.03 V Isc=1.21 A Imp=1.02 A Bypass: One silicon p-n diode Total 636 cells-three parallel strings	1300×100×7 mm ³ 29.5 kg (Rigid)	<i>Excellent energy output even during diffuse or low light conditions</i>	0.25	40%	 Sunny
8	IKS Photovoltaik/ STA14 SolarTrainer 10W module	Poly c-Si	MPP=10 W Voc=22 V Vmpp=17 V Isc=0.72 A Imp=0.52 A Bypass: One silicon p-n diode Total 36 cells-one string	345×294×23 mm ³ Not specified (Rigid)	None	0.25	40%	 Sunny
9	Solland/ SunWeb module- 235 W _p	Poly c-Si	MPP=235 W Voc=36.97 V Vmpp=30.05 V Isc=8.44 A Imp=7.82 A Bypass: Three Schottky diodes Total 60 cells- one string	1613×984×35 mm ³ 22 kg (Rigid)	None	0.24	39%	 Sunny
10	Hanergy/ PowerFlex 90W	CIGS	MPP=90 W Voc=22 V Vmpp=16.5 V Isc=6.3 A Imp=5.4 A Bypass: Diodes at each cell; one at j-box. Total 36 cells-one string	2017×494×3 mm ³ 3.3 kg (Flexible)	<i>Shade tolerant</i>	0.31	50%	 Partly-cloudy
11	Uni-Solar/ PowerBond ePVL	Multi- junction a- Si	MPP=27.4 W Voc=10.44 V Vmpp=7.8 V Isc=4.28 A Imp=3.52 A Bypass: Diodes at each cell Total 5 cells-one string	1325×373×3 mm ³ 1.8kg (Flexible)	<i>Excellent performance even when partially shaded</i>	0.37	59%	 Partly-cloudy

(#) ST and $\%ST$ values are rounded to the closest integer.

maximum theoretical value of ST . Note that, since shading objects pass 1/4 of the received irradiation, in this case the maximum theoretical value of ST is 0.625 instead of 0.5. Inspired by meteorology [38], Table I suggests three shading tolerability classes/symbols for PV modules: sunny ($\%ST < 50\%$), partly-cloudy ($50\% \leq \%ST < 80\%$), and cloudy ($80\% \leq \%ST$). The boundaries, 50% and 80%, are selected based on Linear Support Vector Machine (LSVM) algorithm, which maximizes the distance between boundaries and closest data [39]. Fig. 4 shows the $\%ST$ data set together with calculated *hyperplanes* and proposed boundaries. Since industry needs straightforward and effective boundaries, the calculated hyperplanes have been displaced a little to obtain proposed boundaries.

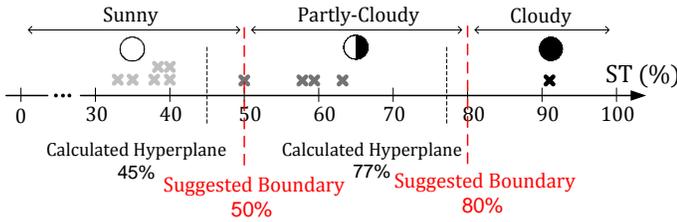


Fig. 4. Proposed shading classification boundaries for PV modules

Table I reveals that modules #3 and #5, which consist of long and narrow cells, perform better at ST measurement than modules #10 and #11, despite using one bypass diode per cell. Therefore, the number of bypass diodes in a module is not always a valid benchmark for shading tolerability comparison. If modules which have performed better at indoor ST test keep on providing higher output at on-field outdoor tests, then it would be rational to say that the ST parameter and its measurement procedure are valid.

B. Outdoor Measurements

For outdoor tests, three types of PV modules (two identical modules of each type, for a total of six modules) were selected from different shading tolerability classes (PV modules #3, #6, and #10 from Table I). Modules were separated into two identical groups and placed at two locations on the same roof, as illustrated in Fig. 5. To obtain more valid results, both groups should experience similar circumstances, except the shading condition. Hence, the two groups of modules were installed on two locations as close as possible while one location is mostly sunny during day-time and the other one is frequently shaded by side trees, a chimney, and a fence. For all modules, tilt and azimuth angles were selected to be 0° and 100° (for easy installation and safety reasons), respectively. Since the aim of this test is performance comparison of PV modules, there is no need for title and azimuth optimization.

For twelve days, the electrical output characteristics of all PV modules, irradiation, ambient temperature, and wind speed were measured from 8.00 to 17.00 using a portable I-V curve tracer (at predetermined time intervals). Position of the modules were exchanged within each same group every day, therefore all the three modules in shading group experienced similar random shading scenarios.

Performance ratio, as a figure of merit for PV system comparison [40], is calculated using the following equation:

$$PR = \frac{G_0}{P_0} \times \frac{\sum_t P_{out}}{\sum_t G_{module}} \quad (8)$$

where $G_0 = 1 \text{ kW/m}^2$ is the reference irradiance and G_{module} is the in-plane irradiance received at module surface (in W/m^2). P_0 is nominal watt-peak (W_p) on the datasheet of the PV module and P_{out} is the in-field output power of the PV module (in W). Note that, same output cables with negligible ohmic resistance were used for all modules. Also, power electronic interface was removed to eliminate the influence of converters efficiency on PR values. Therefore, only modules performance is compared.

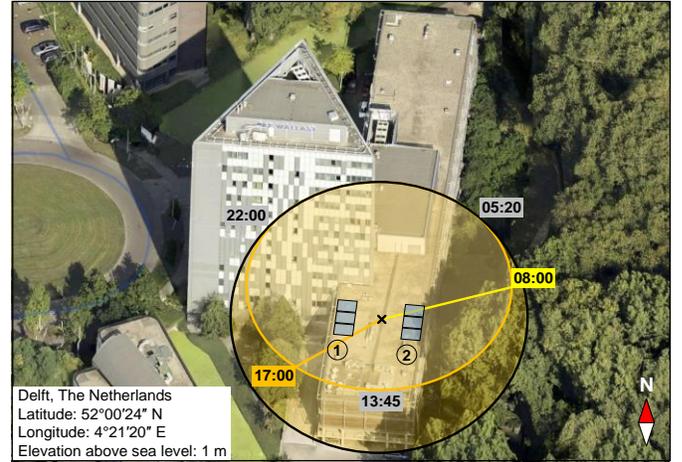


Fig. 5. Outdoor measurements location: installation location of two groups of PV modules (blue rectangles). Black x indicates the location in which outdoor experiments took place. The orange curve is the sun trajectory in June 2016, and the yellow area around (between black and orange curves) is the variation of sun trajectories during the year. According to sun path during 8.00 to 17.00, PV modules in group 2 experience shading most of the time while group 1 modules are exposed to sun. Average local times of sunset (22:00), sunrise (05:00), and solar noon (13:45) during June 2016 are also depicted to provide better perspective of the sun position during outdoor measurements.

Fig. 6 shows daily and 12-day PR values for tested PV modules together with detailed specifications of the measurements. Results show that the module with higher value of ST (module #3) provides higher value of PR at shading condition and the module with lower value of ST (module #6) shows the weakest performance at shading. Therefore, the ranking of the modules for ST (which is measured indoors) appears to be the same as the PR ranking of PV modules at real outdoor shading conditions. Moreover, ratio of differences of the measured outdoor PR values are surprisingly close to the ratio of differences of the obtained indoor ST values: $(PR^{(module3)} - PR^{(module10)}) \div (PR^{(module10)} - PR^{(module6)}) \approx (ST^{(module3)} - ST^{(module10)}) \div (ST^{(module10)} - ST^{(module6)})$ or $(93.75 - 78.98) \div (78.98 - 73.31) \approx (91.4 - 49.6) \div (49.6 - 33.4)$. This fact proves that the value of the $ST_{(i=2,c)}$ can be used instead of $ST_{(i \rightarrow \infty,c)}$ for comparison of shading tolerance of PV modules. Therefore, per outdoor measurement results, equation (5) possibly holds true for all PV modules.

During the measurements, module #3, #6, and #10 produced 1.96, 7.50, and 2.03 kWh in sunny location, and 1.86, 6.17, and 1.61 kWh in shading location, respectively. Since module #6 has higher value of nominal W_p , it produced

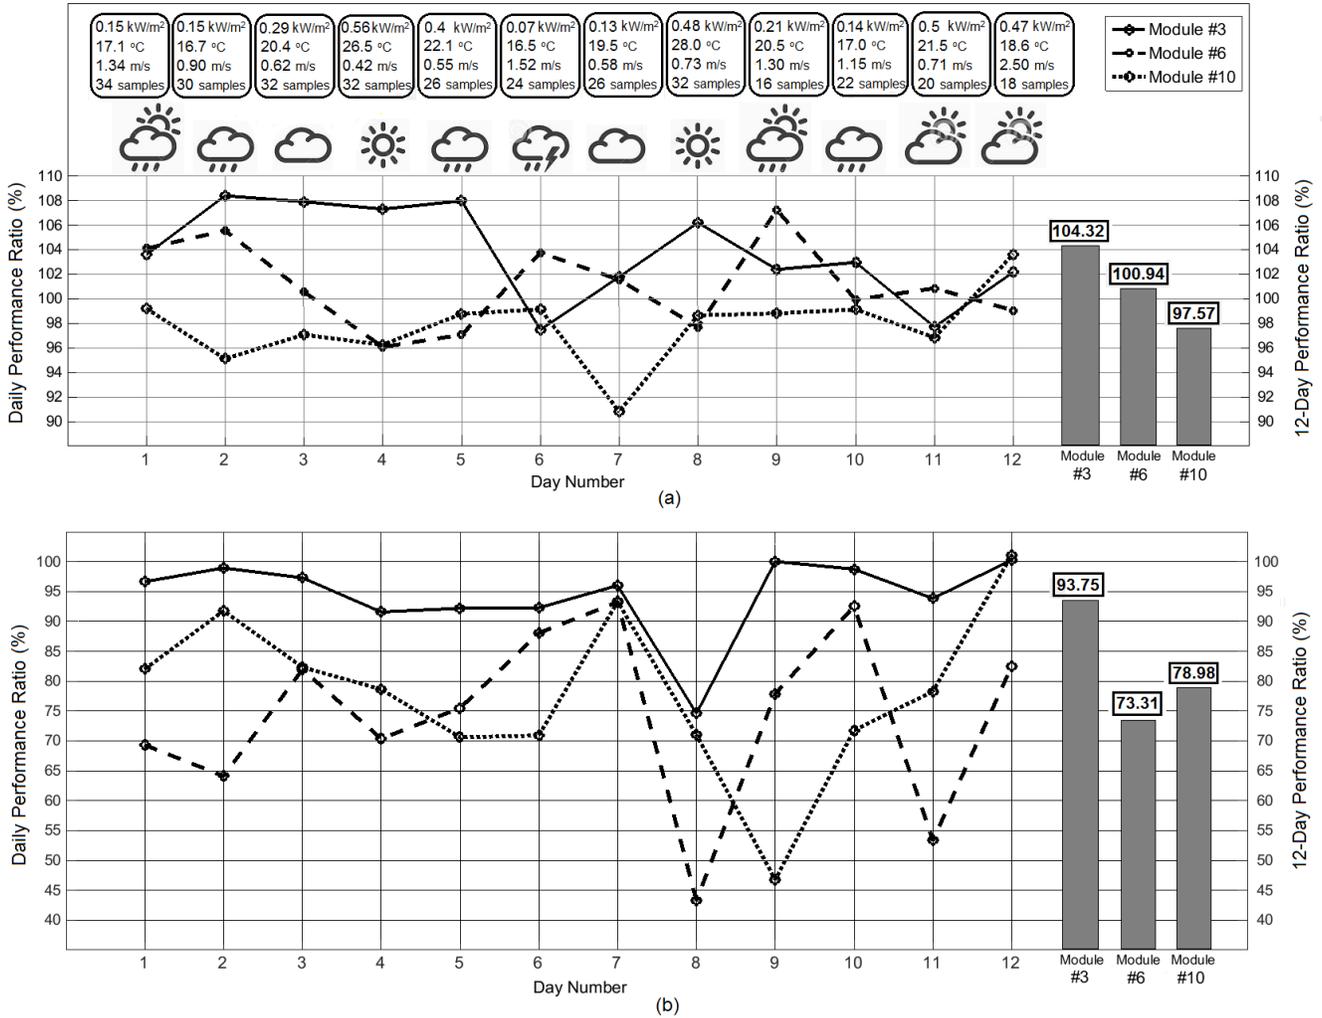


Fig. 6. Outdoor test results: (a) daily (lines) and 12-day (bars) performance ratio values for three tested PV modules exposed to sunny condition; (b) daily (lines) and 12-day (bars) performance ratio values for three tested PV modules exposed to shading condition. Weather condition are: average irradiance (at the same angle), ambient temperature, and wind speed (at modules installation altitude). Sky condition during the measurement time is also indicated. Harsh weather condition and safety policy forced us to skip sampling occasionally. Therefore, the 12-day performance ratio is calculated considering the number of samples on each day. Above hundred percent values of PR for PV modules in (a) is mostly because of the low ambient temperature. In order to obtain more accurate PR values for the modules exposed to shading condition, we did not trust in datasheet figures. Hence, for the modules in the shading-condition group, instead of datasheet nominal values, in-lab measured values of MPP at STC (1 kW/m², AM 1.5, and 25 °C) is used for PR calculation (module #3 = 78.7 W, module #6 = 347.6 W, module #10 = 78.2 W). Whereas for the sunny-condition group, it was confined to datasheet values because study of modules' performance exposed to sunny condition were not the aim of the outdoor experiments.

more energy. While the PR of modules at sunny location are relatively close to each other, there is a huge gap between PR values at shading location. Thus, as the PR difference between best and worst PV modules at shading is more than 20% (93.75-73.31), improper selection of PV modules may lead to considerable yield reduction of the PV system (see Appendix B for an example of ST application in PV system design).

IV. CONCLUSION

This paper has introduced the shading tolerability, *ST*, as a measurable parameter to accurately classify the capability of a PV module to withstand shading. It was mathematically proven that the shading tolerability of a PV module can be modelled by the function of $\lambda / (n+1)$. Experimental results showed that accurate selection of PV modules (based on *ST*), can boost the performance ratio of a PV system by over 20 percentage points. For each tested PV module, shading

tolerability was determined in less than 6 hours. Consequently, it is industrially feasible to perform *ST* test on a single or couple of modules which are randomly selected from an identical group of modules. In this way, for a small amount of energy consumed within six hours, a huge extra energy will be extracted from the sun during the PV system lifetime by selecting correct PV modules. Therefore, it is suggested to add *ST* on photovoltaic modules datasheet as a benchmark to distinguish PV modules regarding shading tolerability.

Measured data has also ignited the idea of a possible linear correlation between *ST* and PR. If such a formula is found, then it is even possible to accurately calculate the output energy of a PV system which is exposed to random shading profiles. This is one of our future research goals together with mathematical modelling of λ . Extracting the mathematical function of λ helps to comprehend how each physical feature of a PV module contributes to the module's performance at shading.

A. Demonstration of the general equation for shading tolerability of PV modules, ($ST_{(i,c)}$)

An ideal PV cell can be modelled by a current source along with an anti-parallel diode. Output power of the PV cell at a constant temperature is almost linearly proportional to received irradiation and each cell provides P_{cell} watts at 1 kW/m². Consider a hypothetical PV module consisting of 2 series-connected solar cells. Assume that irradiation has only two possible values at each PV cell's surface, either 0 or 1 kW/m² (uniform binary distribution, as depicted in Fig. 2). Then, there would be 4 working conditions in which the output power of the module is equal to $2 \times P_{cell}$, $0 \times P_{cell}$, $0 \times P_{cell}$, and $0 \times P_{cell}$ (since cells are modelled as ideal current source, the power of the module is determined by the power of the cell which receives the lowest amount of irradiation). Therefore, shading tolerability value is equal to $ST_{(i=2,c=2)} = (1/2^2)(2+0+0+0) \times P_{cell}$. Fig. A.1 (a) shows the four working conditions for hypothetical 2-cell PV module with two irradiation levels. Further, keeping the number of cells to 2 but increasing the possible irradiation levels to three (0, 0.5, and 1 kW/m²), $ST_{(i=3,c=2)} = (1/3^2)(2+1+1+1+0+0+0+0) \times P_{cell}$ (See Fig. A.1(b)). By following this pattern, increasing the possible irradiation levels and keeping the number of cells constant, the formula of shading tolerability ST for a module with 2 series-connected cells is obtained as:

$$ST_{(i,c=2)} = \left(\frac{1}{2 \times P_{cell}} \right) \left(\frac{1}{i^2} \right) P_{cell} \left[\sum_{k=1}^{k=j} \left(\frac{2}{j} \right) k + \sum_{a=1}^{a=j-1} 2 \left(\frac{j-a}{j} \right) 2a \right] \quad (A.1)$$

where c is the total number of PV cells in the module and $j = i - 1$.

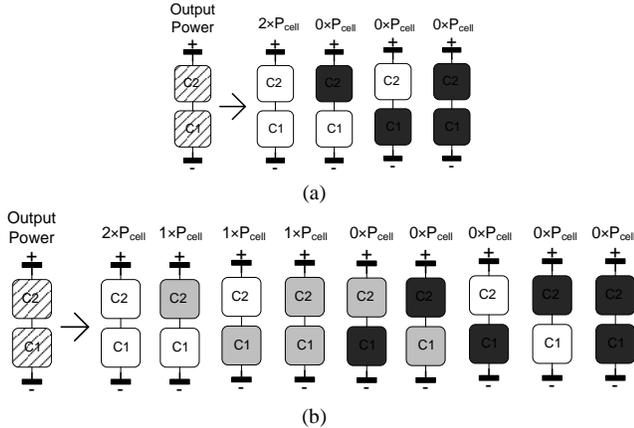


Fig. A.1. Graphical demonstration of ST formulation procedure: (a) PV module with two series-connected cells and two possible irradiation levels (0 and 1 kW/m²) which results in total 2² working conditions, (b) PV module with two series-connected cells and three possible irradiation levels (0, 0.5, and 1 kW/m²) which results in total 3² working conditions. Output power of PV modules at each working condition is also depicted.

Now, one can do the same procedure for a module with 3 series-connected cells and obtain the following formula:

$$ST_{(i,c=3)} = \left(\frac{1}{3 \times P_{cell}} \right) \left(\frac{1}{i^3} \right) P_{cell} \left[\sum_{k=1}^{k=j} \left(\frac{3}{j} \right) k + \sum_{a=1}^{a=j-1} 3 \left(\frac{j-a}{j} \right) (3a+3a^2) \right] \quad (A.2)$$

Or extend it further to a module with 4 series-connected cells:

$$ST_{(i,c=4)} = \left(\frac{1}{4 \times P_{cell}} \right) \left(\frac{1}{i^4} \right) P_{cell} \left[\sum_{k=1}^{k=j} \left(\frac{4}{j} \right) k + \sum_{a=1}^{a=j-1} 4 \left(\frac{j-a}{j} \right) (4a^3+6a^2+4a) \right] \quad (A.3)$$

Considering equations (A.1), (A.2), and (A.3), it is possible to come up with a general equation in which the number of cells is also a parameter:

$$ST_{(i,c)} = \left(\frac{1}{n} \right) \left(\frac{1}{i^n} \right) \left[\sum_{k=1}^{k=j} \left(\frac{n}{j} \right) k + \sum_{a=1}^{a=j-1} n \left(\frac{j-a}{j} \right) \sum_{b=1}^{b=n-1} \binom{n}{b} a^{n-b} \right] \quad (A.4)$$

As it can be seen, the term P_{cell} has been removed from both numerator and denominator of equation (A.4). Keep in mind that in equation (A.4), n is the number of series-connected solar cells and the PV module has only one string of series connected cells. To expand the formula for a PV module with more than one string of cells, we can consider m as the number of parallel strings ($c = n \times m$). Knowing that, expected value of m identical probability trials (m as the number of PV cell strings) is equal to m times the expected value of each trial (each string), then the general normalized shading tolerability equation is obtained as:

$$ST_{(i,c)} = \left(\frac{m}{n \times m} \right) \left(\frac{1}{i^n} \right) \left[\sum_{k=1}^{k=j} \left(\frac{n}{j} \right) k + \sum_{a=1}^{a=j-1} n \left(\frac{j-a}{j} \right) \sum_{b=1}^{b=n-1} \binom{n}{b} a^{n-b} \right] \quad (A.5)$$

B. ST application in PV system calculation and design

In order to show how the ST number can help designers to select proper PV module type for a certain PV system, consider the following example: A local load of 3 kW requires a PV system to be installed in an area with occasional shades. A suitable PV inverter (2-string, 3 kW, 600 V, 5 A) is chosen for the system. There are three options for PV modules with same efficiency and price:

Module #1:

100 W, 40 V, 2.5 A, $ST=65\%$ → Array #1: 15×2

Module #2:

125 W, 50 V, 2.5 A, $ST=55\%$ → Array #2: 12×2

Module #3:

150 W, 60 V, 2.5 A, $ST=45\%$ → Array #3: 10×2

According to the obtained results in the paper, the PV array which provides higher value of $ST_{Array} = ST_{Module} / (q+1)$ possibly produces more energy per W_p during its lifetime (assuming that all arrays have the same lifetime). Then:

$$\text{Array \#1: } 65 / (15+1) = 4.06$$

$$\text{Array \#2: } 55 / (12+1) = 4.23$$

$$\text{Array \#3: } 45 / (10+1) = 4.09$$

Therefore, module #2 should be chosen for the PV system.

ACKNOWLEDGMENT

The authors gratefully acknowledge the helpful support of Kipp & Zonen company and its staff, especially Mr. Oleksii Marianenko, for providing measurement platform and real-time metrological data. They would also like to thank Stefaan Heirman for his effort in preparing the experimental test setup.

DISCLAIMER

Results presented in this work strictly concern the individual photovoltaic modules available and tested in the PV Laboratory of the PVMD group of TU Delft. The performance of such modules might not reflect that of similar or updated modules from the same brand and/or under different circumstances.

REFERENCES

1. Photovoltaics report. March 2016, Fraunhofer institute for solar energy systems ISE: Germany. p. 1-43.
2. Reich, N.H., et al., Performance ratio revisited: is PR > 90% realistic? *Progress in Photovoltaics: Research and Applications*, 2012. 20(6): p. 717-726.
3. Jahn, U. and W. Nasse, Operational performance of grid-connected PV systems on buildings in Germany. *Progress in Photovoltaics: Research and Applications*, 2004. 12(6): p. 441-448.
4. Woyte, A., J. Nijs, and R. Belmans, Partial shadowing of photovoltaic arrays with different system configurations: literature review and field test results. *Solar energy*, 2003. 74(3): p. 217-233.
5. García, M., et al., Solar-tracking PV plants in Navarra: A 10 MW assessment. *Progress in photovoltaics: Research and Applications*, 2009. 17(5): p. 337-346.
6. Rodrigo, P., et al., A simple accurate model for the calculation of shading power losses in photovoltaic generators. *Solar Energy*, 2013. 93: p. 322-333.
7. Bishop, J., Microplasma breakdown and hot-spots in silicon solar cells. *Solar Cells*, 1989. 26(4): p. 335-349.
8. Brooks, A.E., et al. PV system power loss and module damage due to partial shade and bypass diode failure depend on cell behavior in reverse bias. in *Photovoltaic Specialist Conference (PVSC), 2015 IEEE 42nd*. 2015. IEEE.
9. Ziar, H., et al., Analysis of overcurrent occurrence in photovoltaic modules with overlapped by-pass diodes at partial shading. *Photovoltaics, IEEE Journal of*, 2014. 4(2): p. 713-721.
10. Ziar, H., S. Farhangi, and B. Asaei, Modification to Wiring and Protection Standards of Photovoltaic Systems. *Photovoltaics, IEEE Journal of*, 2014. 4(6): p. 1603-1609.
11. Henemann, A., BIPV: Built-in solar energy. *Renewable Energy Focus*, 2008. 9(6): p. 14-19.
12. Shekhar, A., et al. Solar road operating efficiency and energy yield-An integrated approach towards inductive power transfer. in *Proceedings of the 31st European Photovoltaic Solar Energy Conference and Exhibition, Hamburg, 14-18 Sept., 2015; Authors version*. 2015.
13. Luft, W., Partial shading of silicon solar cell converter panels, in presented at the AIEE Conference. Oct. 1961.
14. Baron, W.R. and P.F. Virobik, Solar array shading and a method of reducing the associated power loss, in *IEEE 4th Photovoltaic Specialists Conference*. Aug. 1964.
15. Rauschenbach, H.S., Electrical output of shadowed solar arrays. *Electron Devices, IEEE Transactions on*, 1971. 18(8): p. 483-490.
16. Green, M., E. Gauja, and W. Withayachamnankul, Silicon solar cells with integral bypass diodes. *Solar cells*, 1981. 3(3): p. 233-244.
17. Silvestre, S., A. Boronat, and A. Chouder, Study of bypass diodes configuration on PV modules. *Applied Energy*, 2009. 86(9): p. 1632-1640.
18. Ziar, H., et al. Bypass diode characteristic effect on the behavior of solar PV array at shadow condition. in *Power Electronics and Drive Systems Technology (PEDSTC), 2012 3rd*. 2012. IEEE.
19. Acciari, G., D. Graci, and A. La Scala, Higher PV module efficiency by a novel CBS bypass. *Power Electronics, IEEE Transactions on*, 2011. 26(5): p. 1333-1336.
20. IntegraBus increases reliability of new BP Solar module. *Photovoltaics Bulletin*, 2003. 2003(11): p. 6.
21. Hasyim, E.S., S. Wenham, and M. Green, Shadow tolerance of modules incorporating integral bypass diode solar cells. *Solar cells*, 1986. 19(2): p. 109-122.
22. Kerschaver, E.V. and G. Beaucarne, Back-contact solar cells: A review. *Progress in Photovoltaics: Research and Applications*, 2006. 14(2): p. 107-123.
23. Bauwens, P. and J. Doutrelaigne, Reducing partial shading power loss with an integrated Smart Bypass. *Solar Energy*, 2014. 103: p. 134-142.
24. Srinivasa Rao, P., G. Saravana Ilango, and C. Nagamani, Maximum power from PV arrays using a fixed configuration under different shading conditions. *Photovoltaics, IEEE Journal of*, 2014. 4(2): p. 679-686.
25. Bidram, A., A. Davoudi, and R.S. Balog, Control and circuit techniques to mitigate partial shading effects in photovoltaic arrays. *Photovoltaics, IEEE Journal of*, 2012. 2(4): p. 532-546.
26. García, M., et al., Partial shadowing, MPPT performance and inverter configurations: observations at tracking PV plants. *Progress in Photovoltaics: Research and Applications*, 2008. 16(6): p. 529-536.
27. Esram, T. and P.L. Chapman, Comparison of photovoltaic array maximum power point tracking techniques. *IEEE Transactions on Energy Conversion EC*, 2007. 22(2): p. 439.
28. Subudhi, B. and R. Pradhan, A comparative study on maximum power point tracking techniques for photovoltaic power systems. *Sustainable Energy, IEEE transactions on*, 2013. 4(1): p. 89-98.
29. First Solar technology advantage brochure. 2015, First Solar. p. 1-7.
30. GeneCIS solar module 80W datasheet. 2008, WürthSolar p. 1.
31. Multisol P6-54 Series datasheet. 2010, Scheuten. p. 1-2.
32. PowerBond ePVL datasheet. 2011, Uni-Solar p. 1-2.
33. PowerFlex BIPV datasheet. 2013, Hanergy. p. 1-2.
34. Leon-Garcia, A. and A. Leon-Garcia, Probability, statistics, and random processes for electrical engineering. 2008: Pearson/Prentice Hall.
35. Inoue, L., Decision theory: Principles and approaches. 2009: Wiley.
36. Levy, D., Introduction to numerical analysis. Department of Mathematics and Center for Scientific Computation and Mathematical Modeling, CSCAMM, University of Maryland, 2010.
37. Best Practice Guide-Photovoltaics (PV). Sep. 2010, Sustainable Energy Authority of Ireland (SEAI). p. 1-70.
38. Weather charts, Fact sheet 11 — Interpreting weather charts (version 01). 2012, UK National Meteorological Library and Archive p. 1-56.
39. Burges, C.J., A tutorial on support vector machines for pattern recognition. *Data mining and knowledge discovery*, 1998. 2(2): p. 121-167.
40. Performance ratio quality factor for pv plants. 2010, SMA Solar Technology AG. p. 1-9.