



Delft University of Technology

Modelling the excavation damaged zone using a hydro-mechanical double-scale model

van den Eijnden, Bram; Bésuelle, P.; Collin, F.; Chambon, R.; Desrues, J.

Publication date
2016

Published in
Proceedings of the 2nd Petrus-OPERA PhD and early stage researcher conference 2016

Citation (APA)

van den Eijnden, B., Bésuelle, P., Collin, F., Chambon, R., & Desrues, J. (2016). Modelling the excavation damaged zone using a hydro-mechanical double-scale model. In P. J. Vardon, & D. Bykov (Eds.), *Proceedings of the 2nd Petrus-OPERA PhD and early stage researcher conference 2016: Radioactive Waste Management and Disposal* (pp. 36-39). Delft University of Technology.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Modelling the excavation damaged zone using a hydro-mechanical double-scale model

A.P. van den Eijnden¹, P. Bésuelle^{2,3}, F. Collin⁴, R. Chambon², J. Desrues²

¹Delft University of Technology, Section of Geo-Engineering, Delft, Netherlands

²Univ. Grenoble Alpes, 3SR, 38000 Grenoble, France

³CNRS, 3SR, 38000 Grenoble, France

⁴ArGEnCo dept, Univ. of Liège, 4000 Liège, Belgium

Abstract

The principle of deep geological repositories for the disposal of radioactive waste relies among others on the low permeability of the host rock. As the permeability is influenced by mechanical damage of the material, the coupling between hydraulic and mechanical behaviour of the host rock is of importance in the study of radioactive waste repositories. In this context an approach is investigated for the modelling hydro-mechanical coupled behaviour of Callovo-Oxfordian claystone, a potential host rock for repositories in France. The presented approach is a double-scale finite element method (FE²) using a representative elementary volume (REV) to model the material behaviour at the micro-scale. The global response of this REV serves as a homogenised numerical constitutive law for the macro-scale, to be used in the modelling of the excavation damaged zone (EDZ) around the repository galleries.

The double-scale model

On the macro-scale, a poro-mechanical continuum is defined with fully coupled hydro-mechanical behaviour. Boundary value problems (BVP) are solved using the finite element method, regularized using a local second gradient model [1].

On the micro-scale, the microstructure of the material in the REV contains elastic deformable solids separated by cohesive interfaces, thereby allowing material softening with deformation. Additionally, the interfaces form a porous network allowing fluid transport prescribed by the variation in interface opening. With fluid pressure acting on the solid parts, this gives a coupled hydro-mechanical system at the micro level.

The two scales are linked in the framework of computational homogenization [4,2]. This technique provides a consistent scale transition, taking into account the homogenization of a granular microstructure to a macroscale continuum (Figure 1).

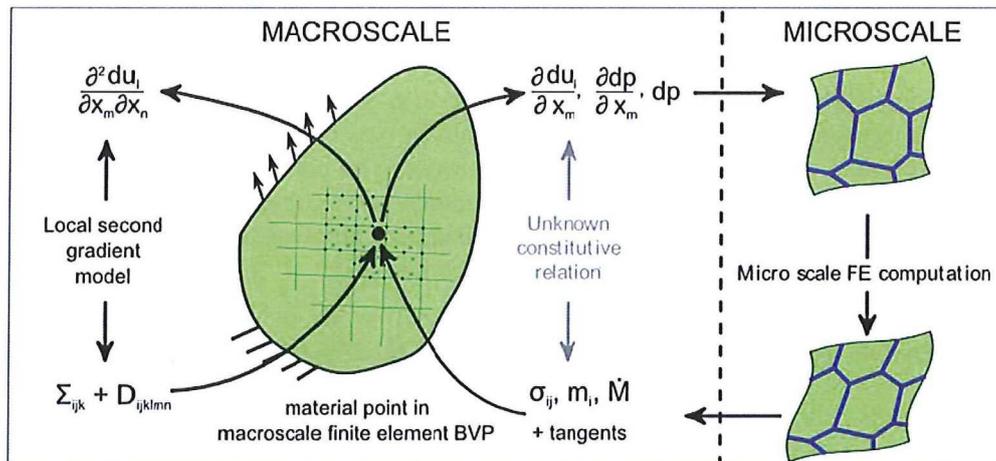


Figure 1: Outline of the double-scale model for hydro-mechanical coupling in the framework of computational homogenization with a poro-mechanical continuum at the macroscale and a granular microstructure with pore channels at the microscale [2].

- [2] A.P. van den Eijnden, "Multiscale modelling of the hydromechanical behaviour of argillaceous rocks", *PhD Thesis*, Université Grenoble Alpes, France, 2015.
- [3] A.P. van den Eijnden, P. Bésuelle, F. Collin, J. Desrues, "Modeling the strain localization around an underground gallery with a hydro-mechanical double scale model; effect of anisotropy", *under review*
- [4] V. Kouznetsova, W.A.M. Brekelmans, F.P.T. Baaijens, 2001. "An approach to micro-macro modeling of heterogeneous materials". *Computational Mechanics* 27 (1), 37–48.
- [5] D. Seyed, G. Armand, A. Noiret, 2016. "'Transverse action' - a model benchmark exercise for numerical analysis of the Callovo-Oxfordian clay-stone hydromechanical response to excavation operations", *under review*