

## Mass and heat flow in deformable fracturing porous media

Musivand Arzanfudi, Mehdi; Al-Khoury, Rafid

**Publication date**

2019

**Document Version**

Final published version

**Citation (APA)**

Musivand Arzanfudi, M., & Al-Khoury, R. (2019). *Mass and heat flow in deformable fracturing porous media*. 1-1. Abstract from COUPLED PROBLEMS 2019, Sitges, Spain.

**Important note**

To cite this publication, please use the final published version (if applicable).  
Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.  
We will remove access to the work immediately and investigate your claim.

# Mass and heat flow in deformable fracturing porous media

Mehdi Musivand Arzanfudi\* and Rafid Al-Khoury<sup>†</sup>

\*, <sup>†</sup> Faculty of Civil Engineering and Geosciences, Delft University of Technology, P.O. Box 5048, 2600 GA Delft, The Netherlands

e-mail: M.MusivandArzanfudi@tudelft.nl, web page: www.tudelft.nl

## ABSTRACT

A coupled thermo-hydrodynamic-mechanical (THM) computational model for multiphase flow in a fracturing porous medium has been developed [1]. It considers mass flow, convective and conductive heat transfer, solid and fluids compressibility, buoyancy, phase change, thermal interactions, wall friction, slip between phases and leakage. The conceptual model ascribe the geometry to be constituted of three domains: a matrix domain, a fracture domain, and a matrix-fracture domain. The averaging theory has been utilized for describing the balance equations in the matrix domain, and the Navier-Stokes equations have been utilized for the fluid flow in the fracture domain. The governing equations are solved using a mixed discretization scheme in which the standard finite element method (FEM) and the extended finite element (XFEM) are coupled. The model has been utilized to simulate the thermo-hydrodynamic-mechanical forces in driving crack propagation during CO<sub>2</sub> geosequestration process. The domain is assumed 70m x 70m, consisting of three layers with an initial crack as shown in Fig. 1a. Fig. 1b shows the distribution of CO<sub>2</sub> saturation, with emphasis on the leakage at the crack tip, and Fig. 2c shows the crack opening.

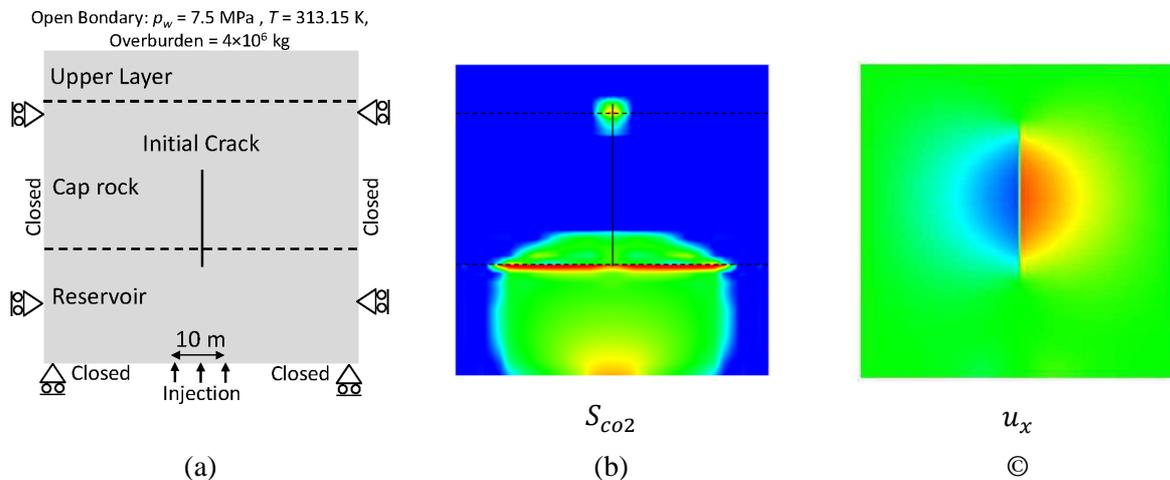


Fig.1 CO<sub>2</sub> geosequestration: (a) geometry and boundary conditions, (b) CO<sub>2</sub> saturation and (c) horizontal displacement.

## REFERENCES

- [1] M.M. Arzanfudi, R. Al-Khoury, "Thermo-hydrodynamic-mechanical multiphase flow model for crack propagation in deformable porous media", *International Journal for Numerical Methods in Fluids*, Vol. **84**: pp. 635-674, (2017).