

**Polarimetric X-Band weather radar
High-resolution rainfall estimation**

Reinoso-Rondinel, R.; Russchenberg, H.; Unal, C.

Publication date

2015

Document Version

Final published version

Published in

Rainfall in Urban and Natural Systems

Citation (APA)

Reinoso-Rondinel, R., Russchenberg, H., & Unal, C. (2015). Polarimetric X-Band weather radar: High-resolution rainfall estimation. In *Rainfall in Urban and Natural Systems: Proceedings of the 10th International Workshop on Precipitation in Urban Areas (UrbanRain 2015)* Article UR15-64 ETH Zürich.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Polarimetric X-Band weather radar: high-resolution rainfall estimation

R. Reinoso-Rondinel^{1*}, H. Russchenberg¹, C. Unal¹

¹ Department of Geoscience and Remote Sensing, Delft University of Technology, Delft, The Netherlands

*Corresponding author: r.r.reinosorondinel@tudelft.nl

Abstract

Weather observations are conventionally performed by C-band weather radars with spatial and temporal resolution of 1 km and 5 min, respectively. However, in recent years, C-band weather radars have been upgraded from single to dual-polarimetric to improve the quality of their measurements. Still, these spatial and temporal resolutions might be undesirable for the detection of localized heavy rainfall which might be necessary to model fast rainfall-runoff processes in urbanized areas. Therefore, X-band weather radars have been introduced to increase the resolution of rainfall rate (R) estimation. For example, in the USA, a network of dual-polarimetric X-band radars has been used to estimate rainfall rates of severe storms at high-resolution (Wang and Chandrasekar, 2010). In Western Europe, the RainGain project includes a network of X-band radars to obtain high-resolution rainfall rates to cope with urban flooding (<http://www.raingain.edu>).

For dual-polarimetric radars, several rainfall rate estimators have been based on the specific differential phase (K_{dp}) because of its independence to radar miscalibration and attenuation. However, typical estimations of K_{dp} require a substantial amount of smoothing processes. In this work, a new method to estimate K_{dp} for X-band frequencies is introduced. The method is a modified version of the one given by Otto and Russchenberg (2011) in order to control its inherent bias-variance dilemma. In addition, the variance of the K_{dp} estimator was mathematically formulated for a quality control scheme. For moderate and convective storms, the estimation of rainfall rate was given by a R - K_{dp} power-law relation.

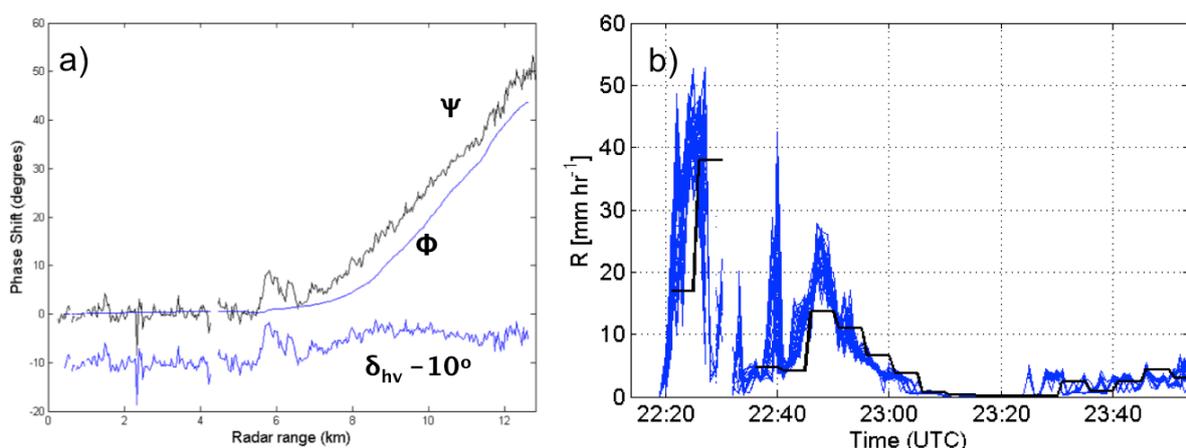


Fig 1: a) Propagation differential phase, Φ_{dp} , constructed from the new estimation of K_{dp} . b) Rainfall rate intensities by IDRA (blue lines) and simulated C-band (black line).

The new method was applied to a storm event observed by the dual-polarimetric X-band weather radar, IDRA hereafter, in the Netherlands on June 28 2011. To show the performance of the K_{dp} estimator, the propagation differential phase (Φ_{dp}) was successfully reconstructed as shown in Fig 1a). Moreover, the impact of spatial and temporal resolutions on the variability of rainfall rates is shown in Fig 1b). Estimated rainfall rates at 30 m and 1 min resolutions using IDRA were averaged

and under-sampled at 1 km and 5 min, respectively, to simulate rainfall rates from C-band radars. Results have shown that the estimated K_{dp} and rainfall rate were able to retain the spatial variability of the storm at scales of tens of meters. Furthermore, they were able to produce a variance similar to or less than those of conventional methods. It is foreseen that the proposed method for dual-polarimetric X-band weather radars will improve the quality of radar-based rainfall estimations in real-time as recommended by the urban-hydrology community.

Acknowledgements

This work was supported by INTERREG IVB NWE project RainGain.

References

- Otto, T., and Russchenberg, H. (2011), Estimation of the specific differential phase and differential backscatter phase from polarimetric weather radar measurements of rain. *IEEE Geoscience and Remote Sensing Letters*, 8, 988 – 992.
- Wang, Y., and Chandrasekar V. (2010), Quantitative precipitation estimation in the CASA X-band dual-polarization radar network. *Journal of Atmospheric and Oceanic Technology*, 27, 1665 – 1676.