TU Delft

Delft University of Technology

Integration of Active Morphing Technology With Smart Morphing Wing Concept for Simultaneous In-Flight Performance Optimisation, Load Alleviation and Flight Dynamic Control (PPT)

Mkhoyan, T.; Stuber, V.L.; Nazeer, N.; De Breuker, R.; Groves, R.M.; Groen, W.A.; van der Zwaag, S.; Sodja, J.; Wang, X.

Publication date
2020

Document Version
Final published version

Citation (APA)
Mkhoyan, T., Stuber, V. L., Nazeer, N., De Breuker, R., Groves, R. M., Groen, W. A., van der Zwaag, S., Sodja, J., & Wang, X. (2020). *Integration of Active Morphing Technology With Smart Morphing Wing Concept for Simultaneous In-Flight Performance Optimisation, Load Alleviation and Flight Dynamic Control (PPT)*. ASME 2020 Conference on Smart Materials, Adaptive Structures and Intelligent Systems, SMASIS 2020.

Important note
To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright
Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy
Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

This work is downloaded from Delft University of Technology.
For technical reasons the number of authors shown on this cover page is limited to a maximum of 10.

Integration of Active Morphing Technology With Smart Morphing Wing Concept for Simultaneous In-Flight Performance Optimisation, Load Alleviation and Flight Dynamic Control

Tigran Mkhoyan,Vincent Stuber, Nakash Nazeer, Roeland De Breuker Roger Groves, Pim Groen, Sybrand van der Zwaag, Jurij Sodja, Xuerui Wang

TU Delft

Aeroelastic Structures

TU Delft

Introduction

Trend towards flexible configurations:

Adaptive Compliant Trailing Edge

(source: NASA)

Variable camber continuous trailing edge flap flap

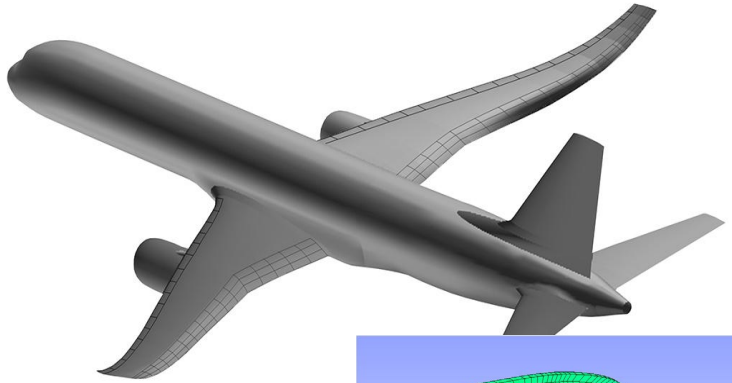

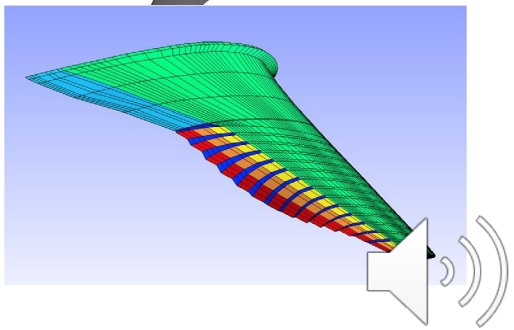

(source: NASA)

Applications: slender flexible (morphing) aircraft

Cellular morphing wing

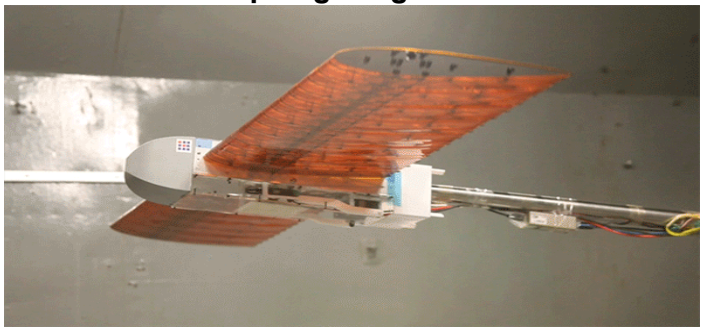

(source: NASA/MIT)

HALE solar power aircraft

(source: NASA)

Facebook drone aquila

(source: Facebook)

SmartX : SmartX-Alpha

TU Delft

Goal: the Smart Morphing Wing

How can we use multidisciplinary integration of novel control laws, sensing methods, and actuation mechanism for real-time, in-flight, multi-objective optimisation of actively morphing wing?

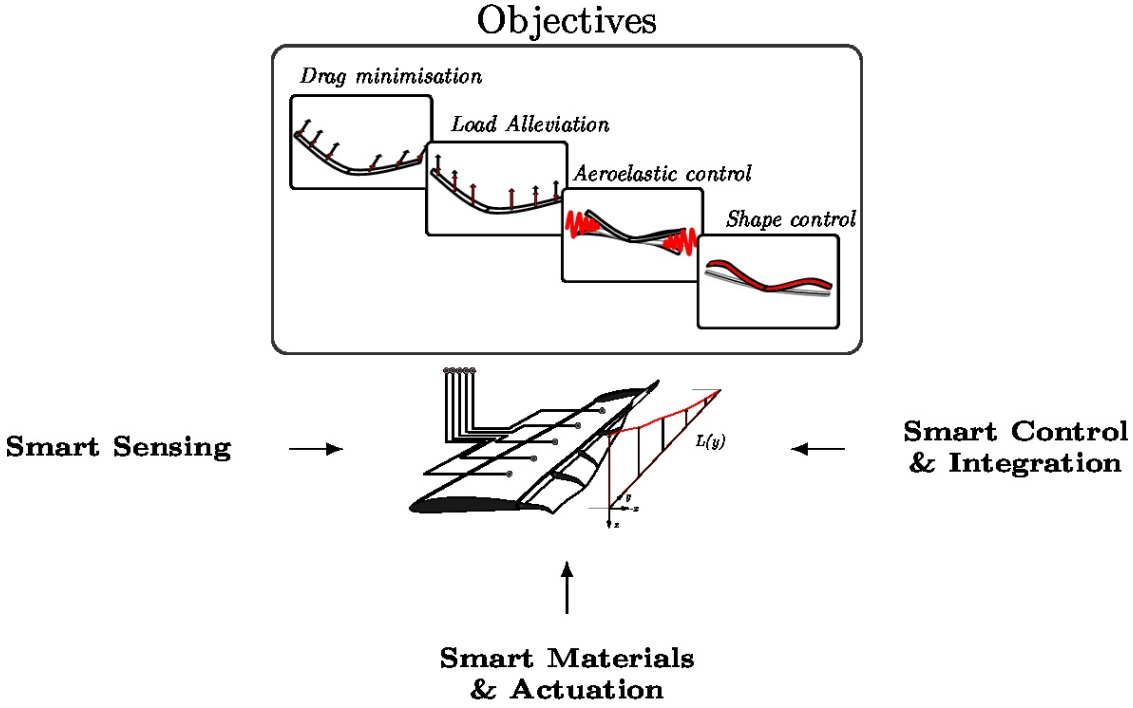

Smart-X: multidisciplinary collaboration

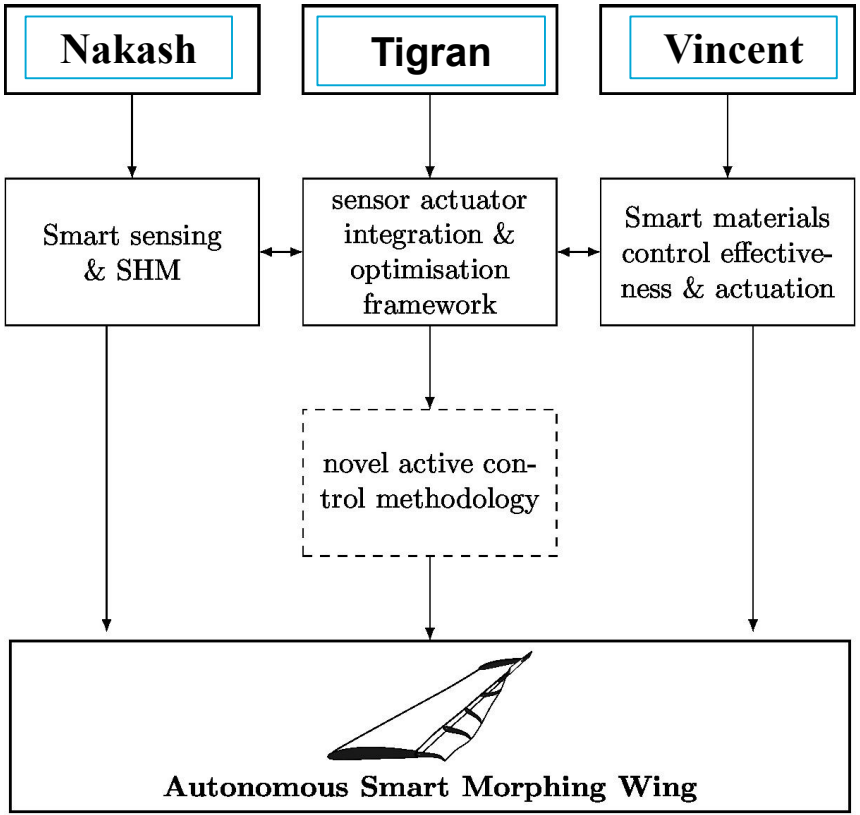

TU Delft

Smart-X rationale

Real-time multi-objective performance optimisation

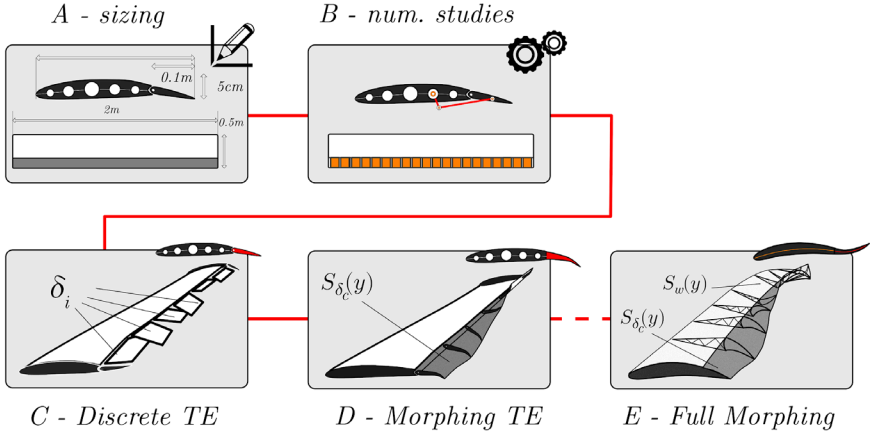

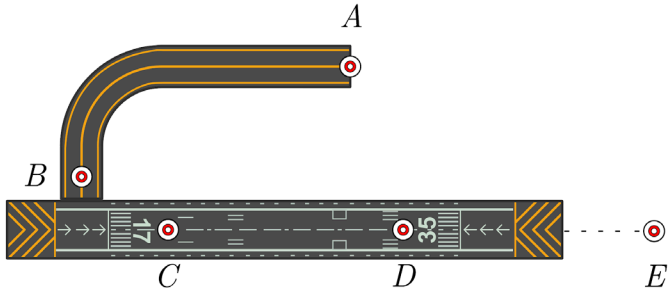

Real-time multi-objective performance optimisation

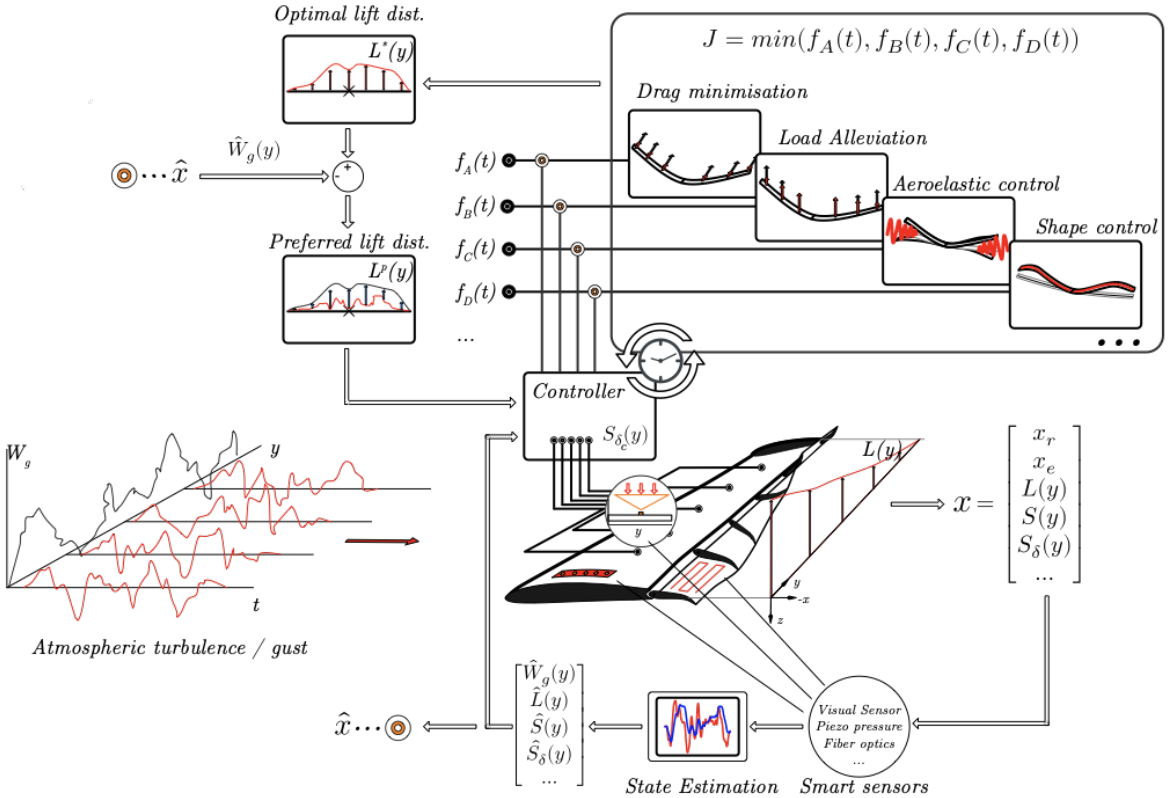

Morphing Design

TU Delft

FSI FRAMEWORK

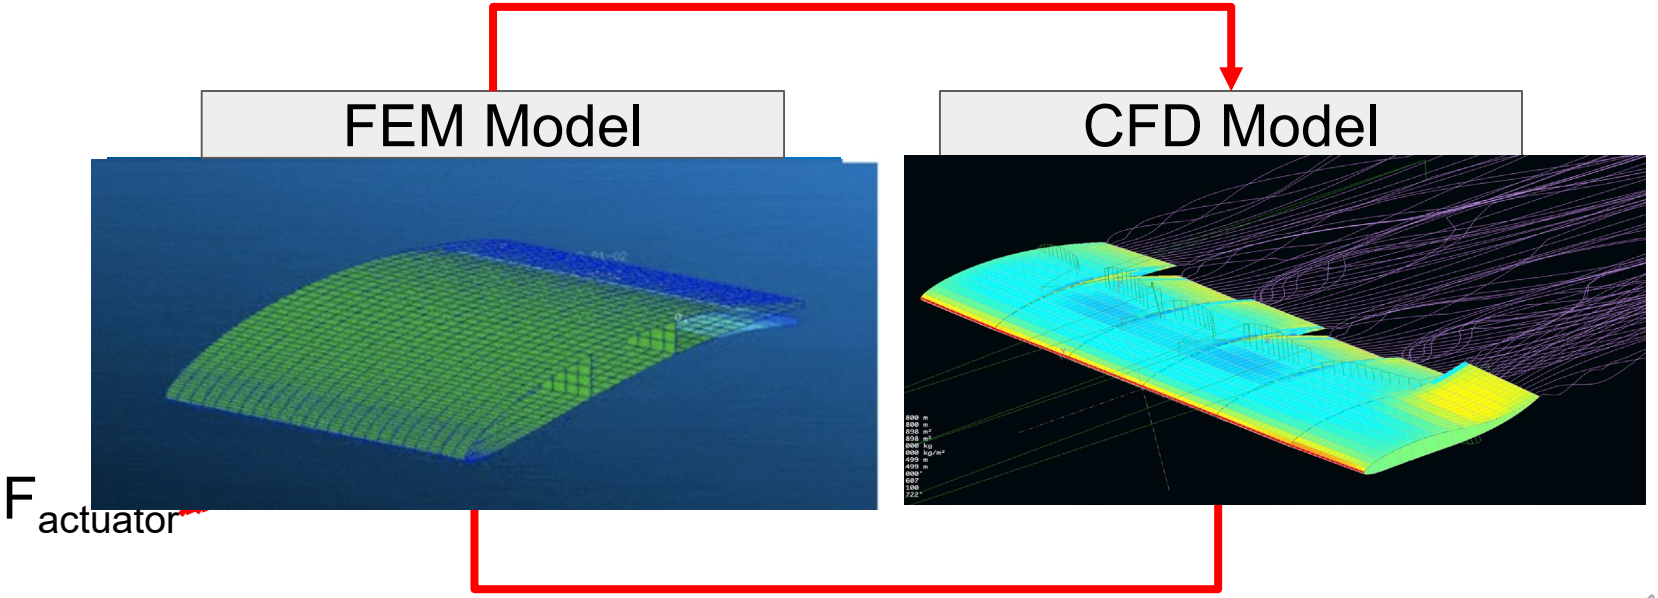

Distributed TRIC concept with spanwise continuity

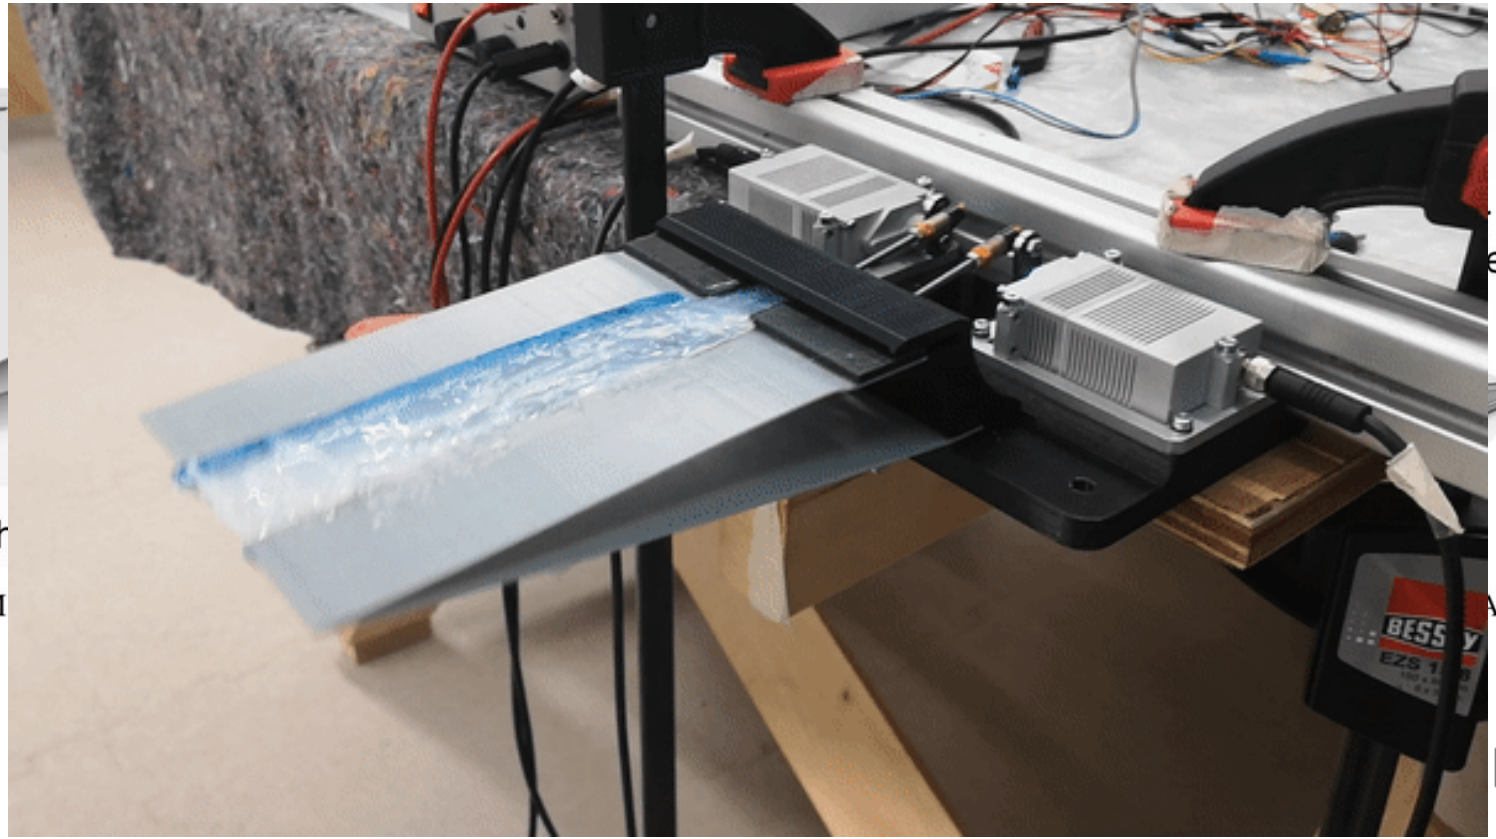

Laminate design with ply dropping

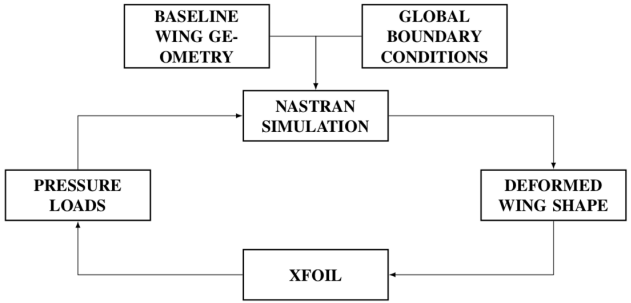

BEND UP +30mm

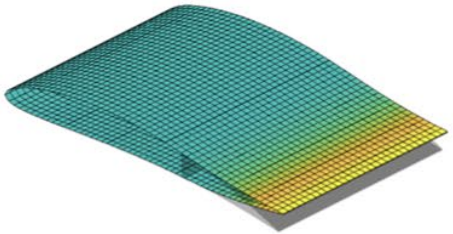

BEND DOWN -20mm

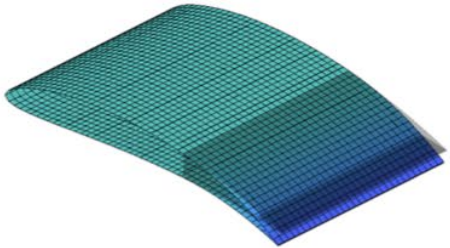

Manufacturing process

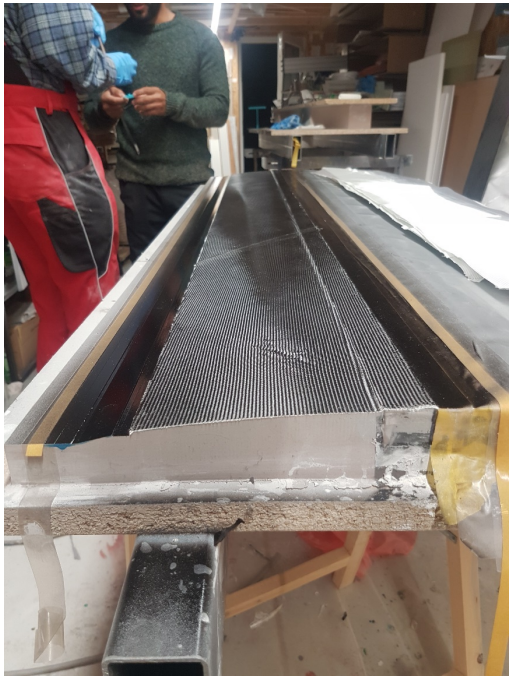

Manufacturing process

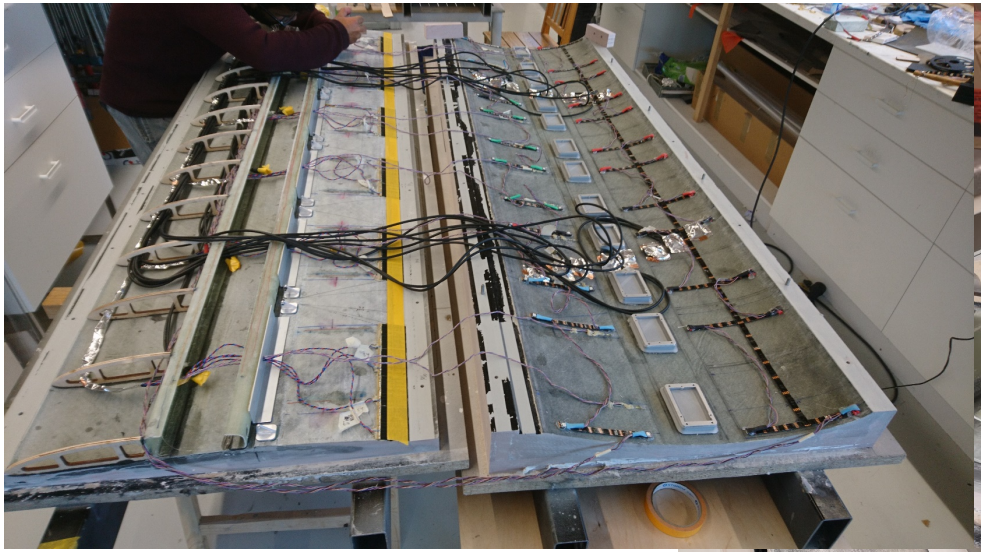

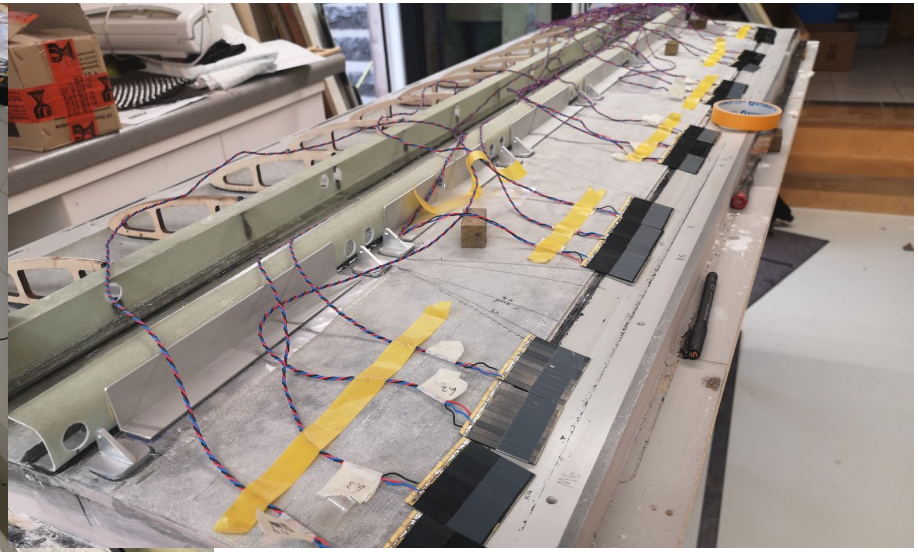

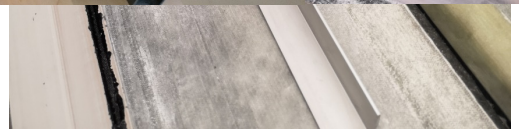

Piezoelectric Stall Sensor and Actuator

TU Delft

Piezoelectric Flow Sensors

Sensors directly measure oscillations in the boundary layer

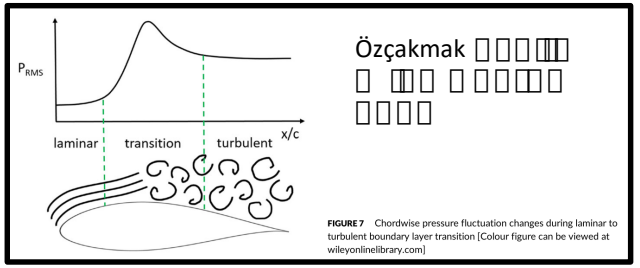

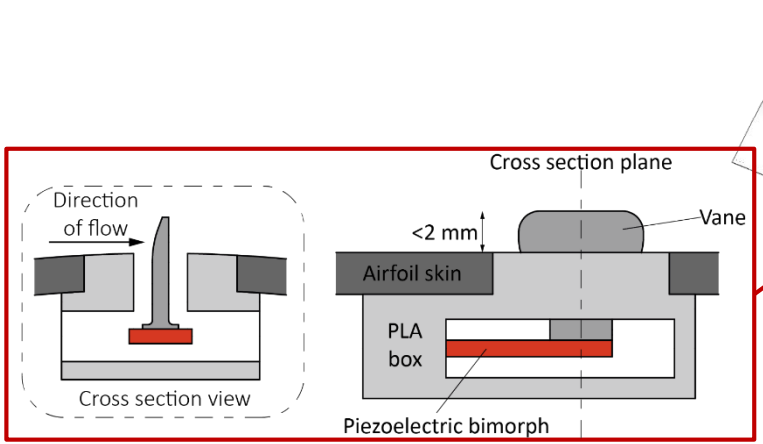

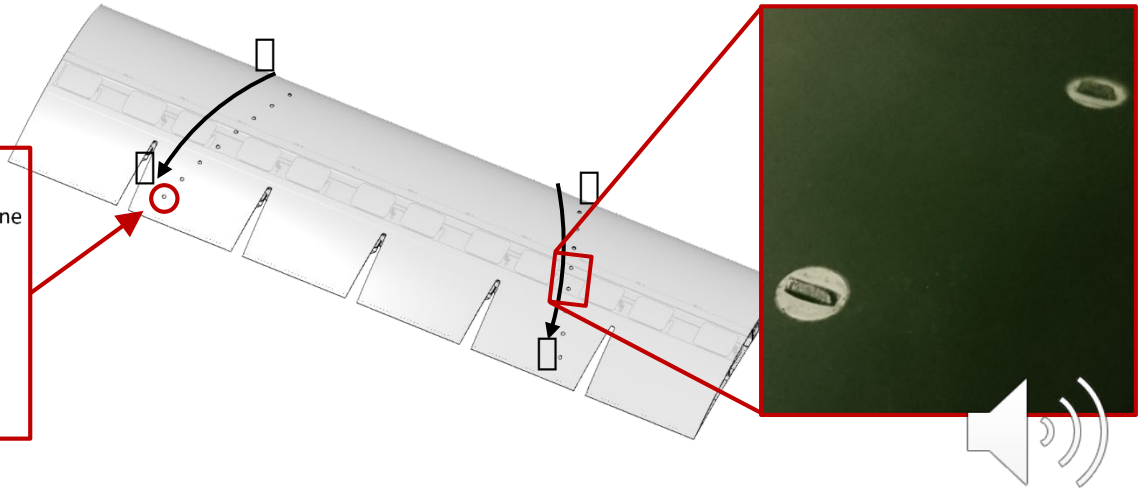

TU Delft

Locating Transition (not-morphing)

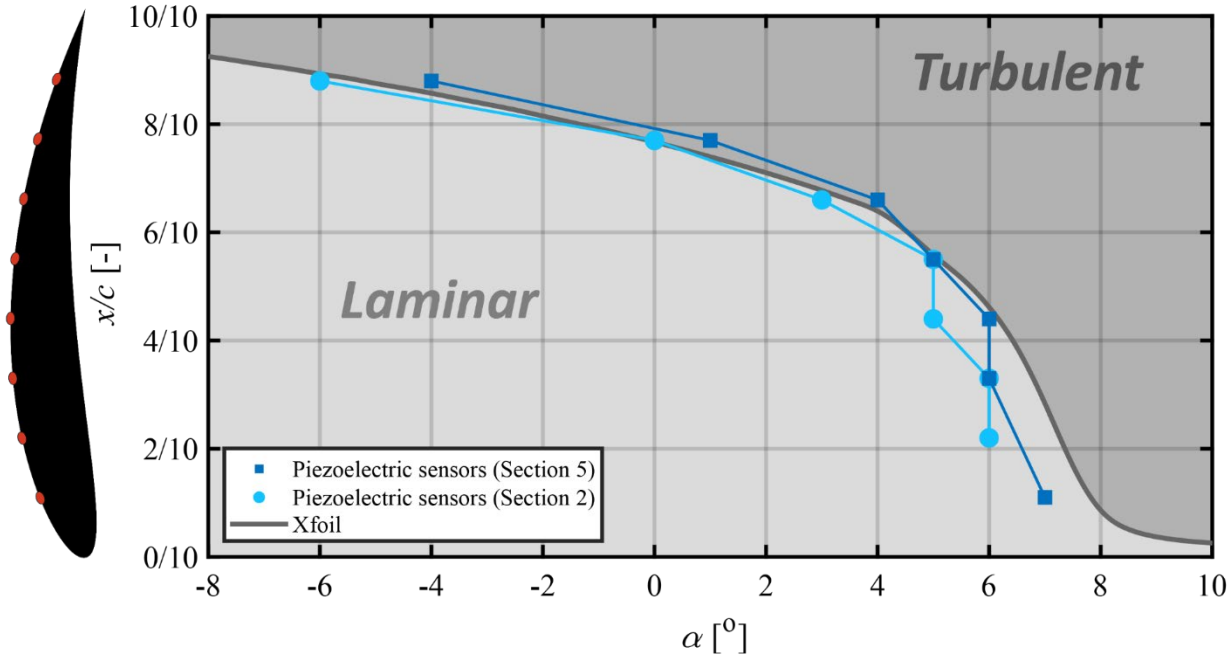

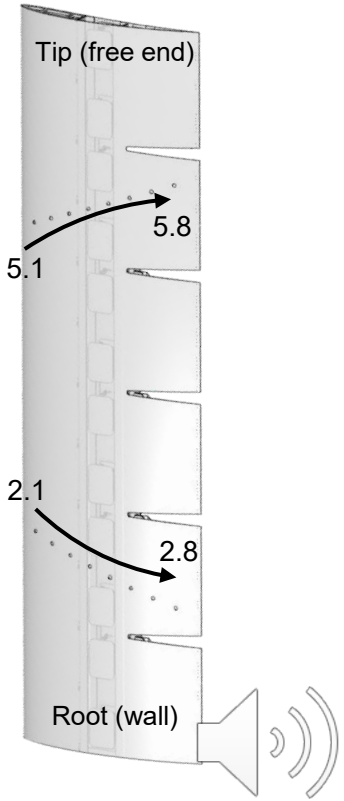

Locating Transition (morphing?)

How will morphing affect the location of transition?

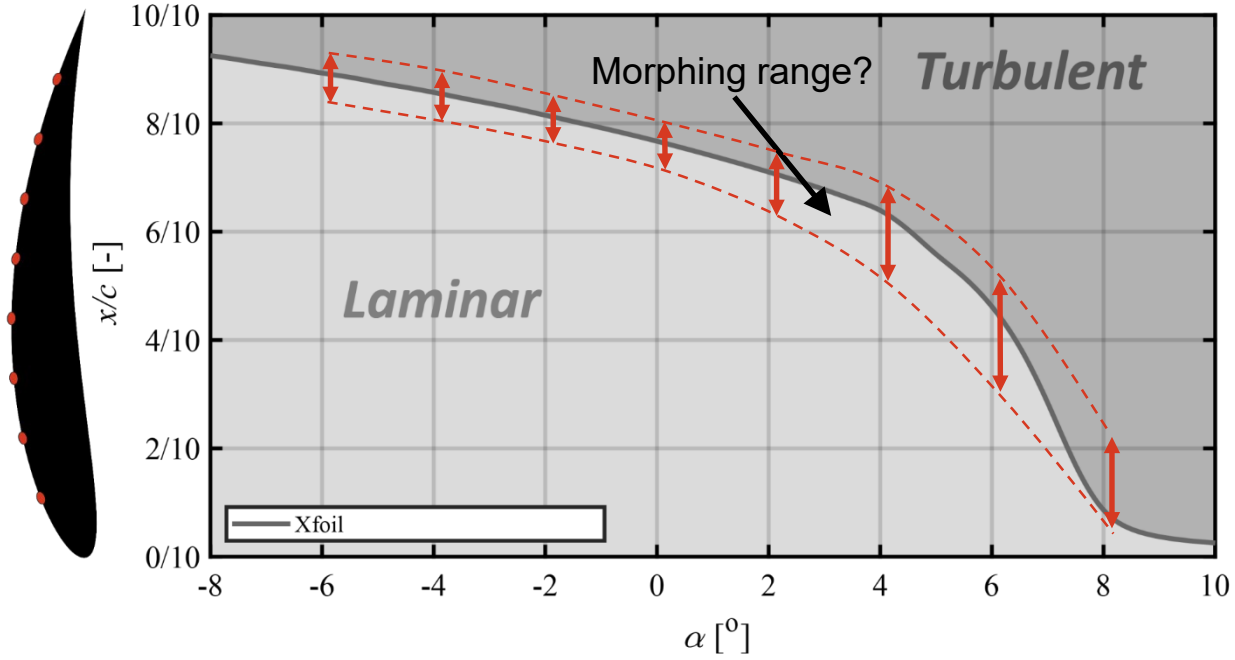

Piezoelectric Actuators

- Little space required
- Fast response (capped at 25 Hz)
- Small deflections (couple of mm)

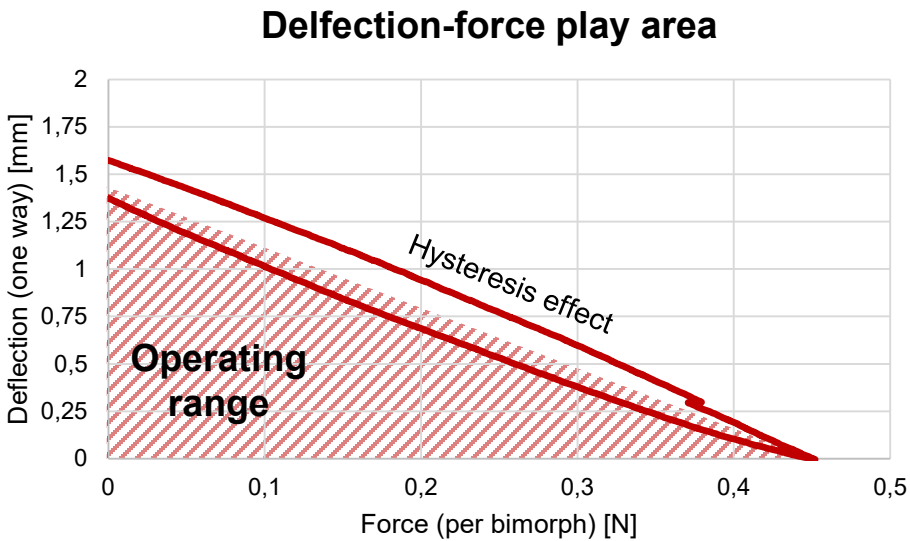

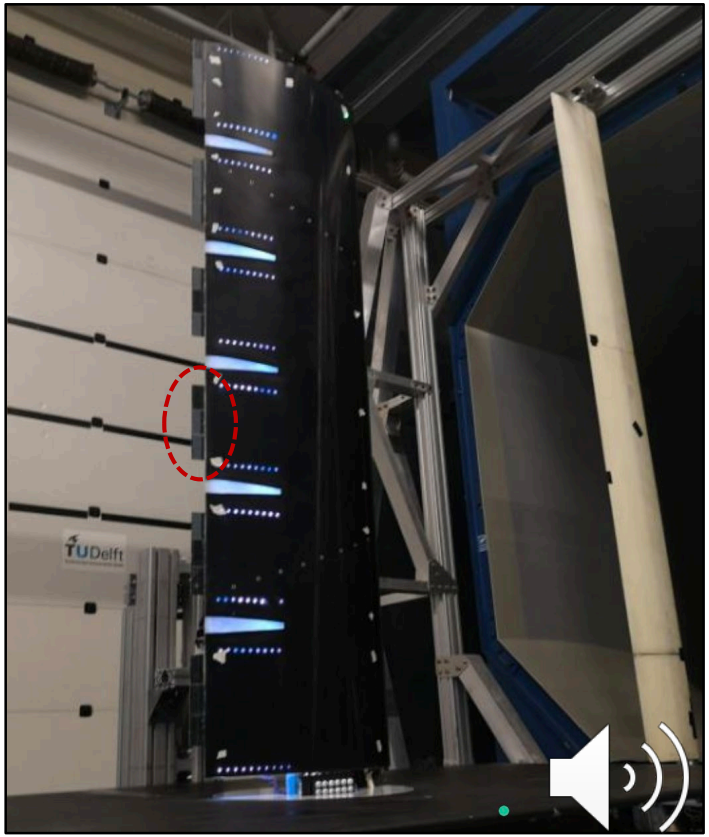

Fibre optics
Shape sensing

TU Delft

Methodology

Bragg grating (FBG)

$$\lambda_B = 2n_{eff}\Lambda$$

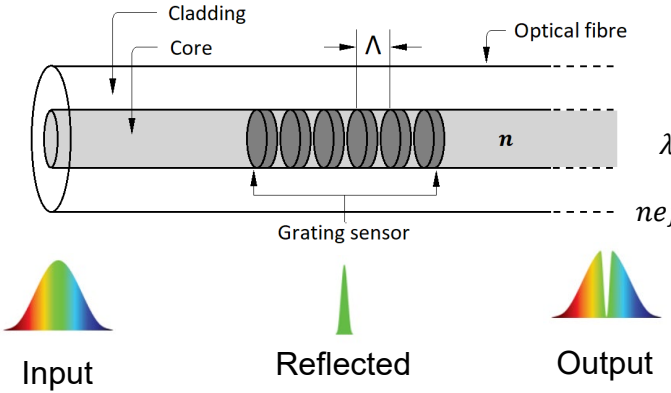

Λ: Periodic spacing

λB: Grating wavelength

$neff$: Core refractive index

Fabry-Pérot (FP)

$$\Delta\varepsilon = \frac{\Delta\lambda_{BS}}{(1-\rho_a)\lambda_B} \qquad \varepsilon = \frac{\Delta d}{L}$$

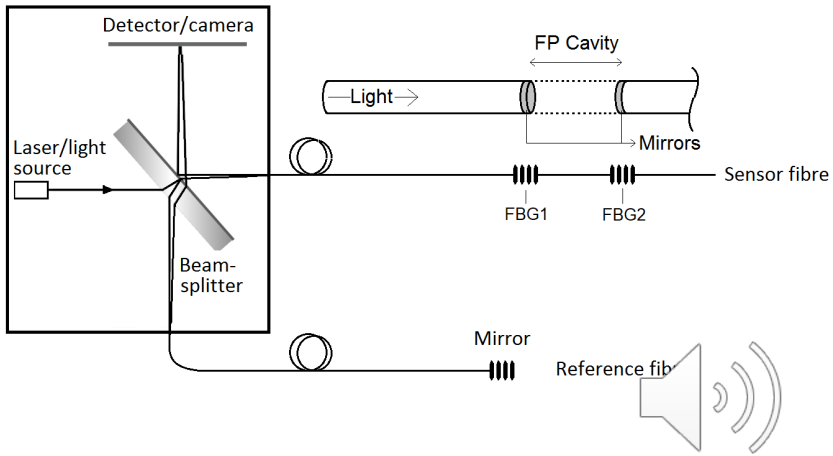

Setup

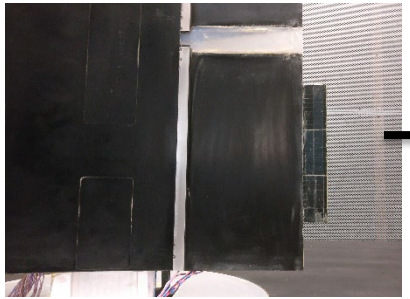



Lower-surface

14 sensing fibres
2 fibres per morphing section
2 fibres in spanwise direction

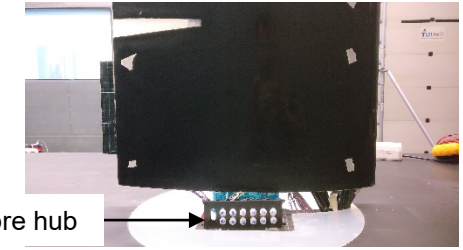

Upper-surface

Wing section

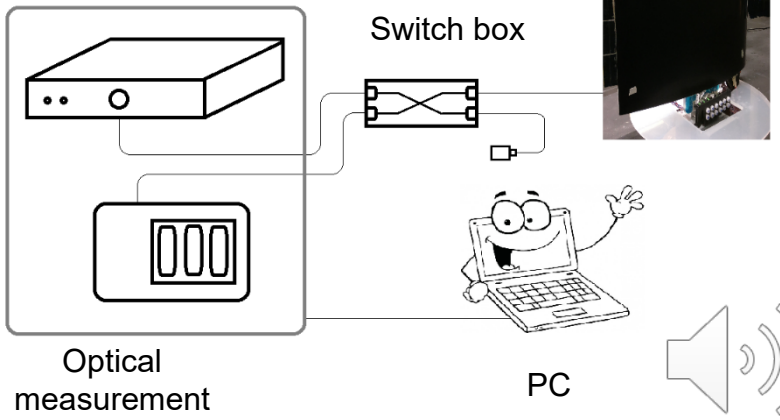

TU Delft

Deflection estimation

Measured vs estimated values in mm for bend up, bend down and twist configuration *

Bend up

Measured	Estimated
2	2,1
6	1,93
9	8,48

Bend down

Measured	Estimated
5	3,16
10	11,58
15	13,31

Twist - right tip

Measured	Estimated
2	0.66
4	5.18
6	5,98

Twist - left tip

Measured	Estimated
2	1.25
4	4.65
6	5.97

- Average error of 1.3 mm for bend up & down with a maximum error of -4 mm
- Average error of -0.05 mm for twist with a maximum error of -1.34 mm

TU Delft

* *'Multi-modal fibre optic shape sensing for the SmartX morphing wing demonstrator'* - Nakash Nazeer, ASME 2020 SMASIS

Morphing Control and Real-time Visual Tracking

TU Delft

Visual tracking for control feedback

- Novel tracking methods (KCF-AEKF)
- Unsupervised clustering methods

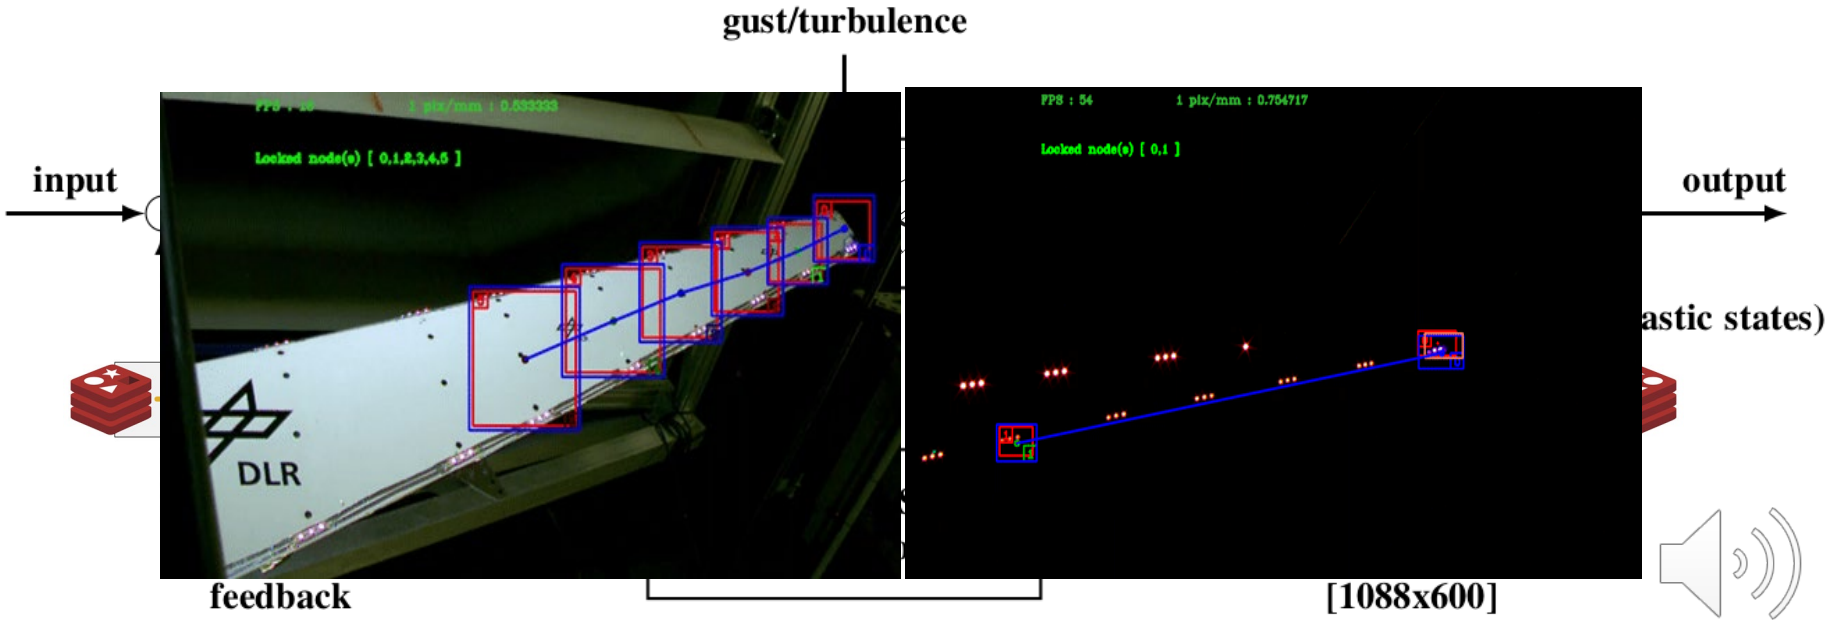

Visual tracking for control feedback

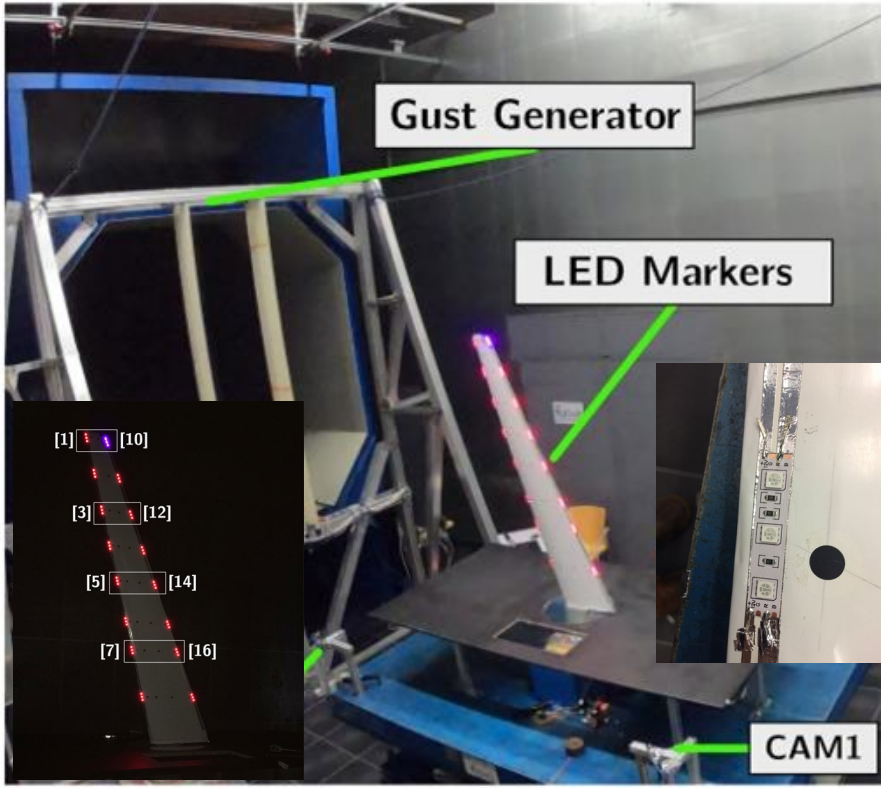

Control Methods

Linear quadratic Gaussian (LQG) control

- Classical Model-based control
- Requires Kaman filter for state observation

Incremental control

- Novel sensor-based control
- Replaces a part of model information by senso
- Enhanced robustness against model uncertain disturbances

Gust Load Alleviation

Gust generator

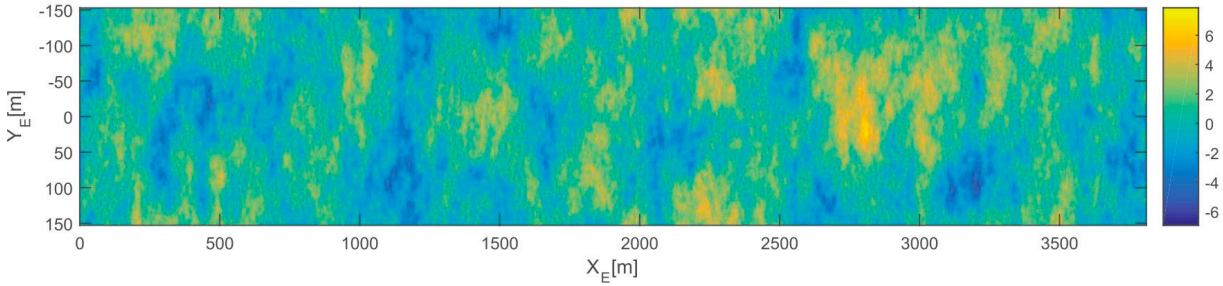

Figure 1. 2D von Kármán vertical turbulence field with $L_g = 762m, \sigma = 3m/s$.

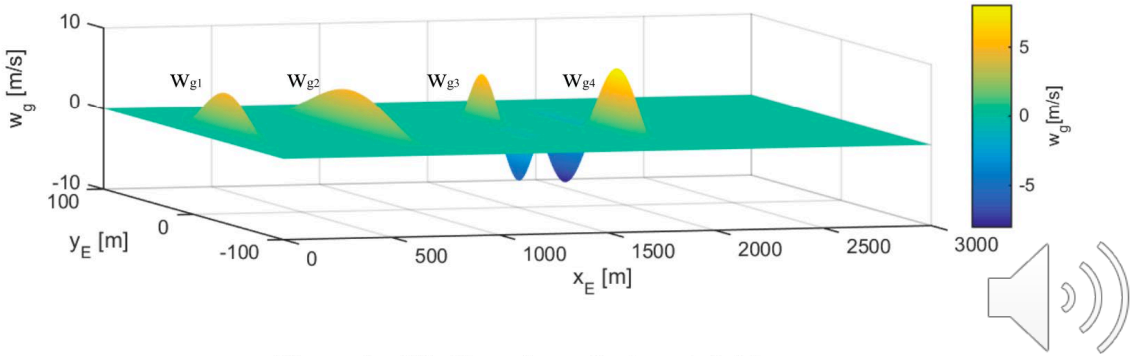

Figure 2. 2D "1-cos" vertical gust field.

Maneuver Load Alleviation

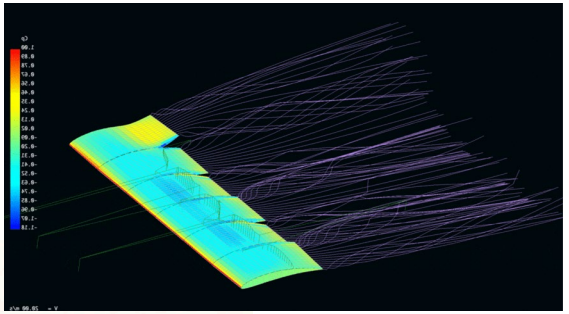

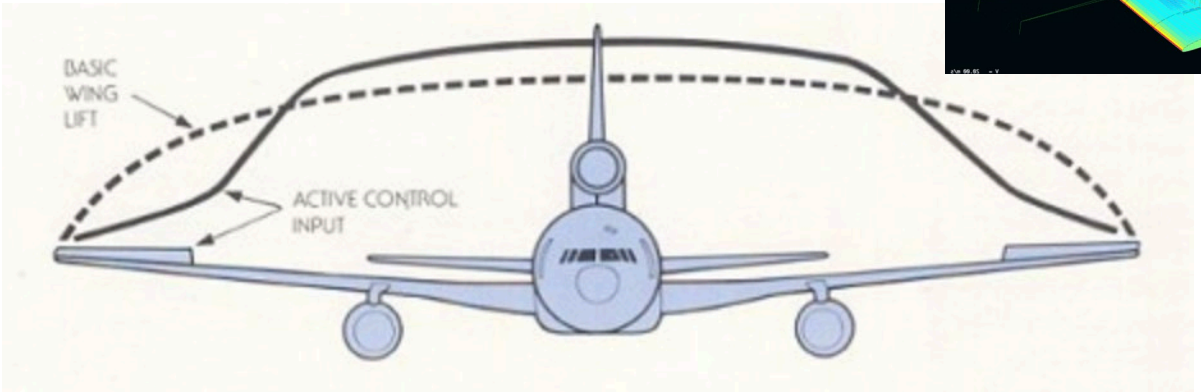

Use distributed morphing modules to redistribute the lift in spanwise direction

Alleviate the loads during maneuvers

Conclusions

- Active morphing design with multidisciplinary state-of-the art technology development
- Morphing design is challenging in terms of design and manufacturing
- Piezo electric materials are suitable for novel sensor and actuator designs
- Fiber optic sensing methods for novel morphing structures
- Control and real-time feedback of morphing deflections is needed for morphing control

Future Work

TU Delft

Smart-X adaptive morphing control





THANK YOU

TU Delft