

## Effects of metocean conditions on selecting optimal location for wave energy production

Lavidas, G.; Loukogeorgaki, Eva; Michailides, Constantine ; Chatjigeorgiou, Ioannis K.

**Publication date**

2021

**Document Version**

Final published version

**Published in**

Proceedings of the 11th European Wave and Tidal Energy Conference

**Citation (APA)**

Lavidas, G., Loukogeorgaki, E., Michailides, C., & Chatjigeorgiou, I. K. (2021). Effects of metocean conditions on selecting optimal location for wave energy production. In *Proceedings of the 11th European Wave and Tidal Energy Conference : 5-9th Sept 2021, Plymouth, UK* Article 1906 EWTEC.

**Important note**

To cite this publication, please use the final published version (if applicable). Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

# Effects of metocean conditions on selecting optimal location for wave energy production

George Lavidas, Eva Loukogeorgaki, Constantine Michalides, and Ioannis K. Chatjigeorgiou

**Abstract**—Wave Energy Converters (WEC) have seen a wide variety of innovations capable to harness the vast untapped energy source of the seas. This wide range of WECs often has varied applicability and power production capabilities, making the selection of a device overwhelming. These uncertainties are increased when considering the interactions and suitability of the device with local metocean conditions, and the impacts to long-term reliable operation. The study focuses on the Mediterranean region and presents a comprehensive approach in selecting a WEC, using a novel Selection Index for Wave Energy Deployments (SIWED), which accounts for resource, extreme events, power production capabilities, reducing uncertainties and biases. As a case study our approach explores: (i) the viability of WECs at milder resource (ii) the use of SIWED to select the “optimal” location and (iii) an approach to optimise considering the multi-faceted resource impacts. The study provides a comprehensive assessment of the “hidden” benefits of wave energy in the Mediterranean and its methodology is universally replicable. Finally, a discussion and overview on the importance of this interdisciplinary method for WEC deployments is underlined.

**Index Terms**—Mediterranean Sea, Capacity factors, Optimal site selection, Wave energy

## I. INTRODUCTION

CLIMATE Change impacts are expected to have disastrous effects on human societies, with increased probabilities for extreme events, flooding, severe weather, and the socio-economic strata of human societies [1]. Amongst necessary steps to mitigate Climate Change, including the reduction of  $CO_2$  emissions, several countries committed to ambitious targets at the Conference of Parties in 2015 [2]. European Union Member States have set ambitious targets for 2020 and 2030, with regards to greenhouse gas emissions and renewable energy [3]. Currently, National Energy and Climate Plans (NECPs) are under consultation, and it is clear that much has to be done in order to achieve the targets [4]. Common thread in all NECPs is the premise that all local renewable

George Lavidas, is an Assistant Professor leading the Marine & Hydro Energies at Faculty of Civil Engineering and Geosciences, Department of Hydraulic Engineering, Offshore Engineering Group, Delft University of Technology (TU Delft), Steinweg 1, 2628 CN Delft, The Netherlands (e-mail: g.lavidas@tudelft.nl)

Eva Loukogeorgaki, is an Associate Professor at the Department of Civil Engineering, Aristotle University of Thessaloniki, P.O 54124 Thessaloniki, Greece (e-mail: eloukog@civil.auth.gr)

Constantine Michalides, is a Lecturer at the Department of Civil Engineering and Geomatics, Cyprus University of Technology, Limassol, 3036, Cyprus (e-mail: c.michalides@cut.ac.cy).

Ioannis K. Chatjigeorgiou, is a Professor & Vice Rector at the School of Naval Architecture and Marine Engineering, National Technical University of Athens, 9 Heroon Polytechniou Ave., Zografos Campus, 15780, Athens, Greece National (e-mail: chatzi@naval.ntua.gr)

energy sources have to be used more. However, this premise encompasses several oversights and the need for innovative energies to be further incorporated.

In most studies wind is expected to be a “base” load plant, with local resources availability differentiating the mixture. Some studies, included high fidelity assessment of multi generation [5], [6], showing that as the energy fraction increases, a system can attain “stability” with wave energy, stabilising variable wind and limited solar production. Such an example is the case of Denmark, where it was estimated that as wind increases PV and wave are needed, with wave obtaining a large significance due to its production profile [5]. The fact that wave energy is a complementary resource for wind, increases its value and potential for utilisation.

Wave energy presents a multi-layered challenge due to complexities in power production, and balances that must be achieved. Success in Wave energy converter (WEC) deployment is a combination of three main pillars: resource, extractable energy and economics (see Figure 1).

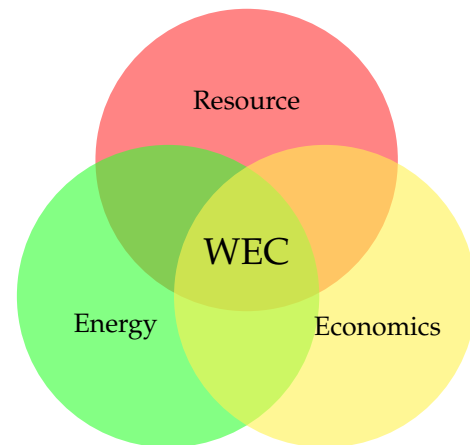


Fig. 1. Principles of balance for the development of any renewable energy technology.

The wave energy resource ( $P_{wave}$ ) corresponds to the energy per unit of wave crest width, expressed in watts/meter (W/m).  $P_{wave}$  does not represent a value that is fully usable but only the resource potential, useful energy produced depends on WEC characteristics such as efficiency. Extracted energy is highly dependent on WEC geometry and hydrodynamic interactions with local metocean conditions [7], [8]. Energy refers to extracted energy (power produced) by a WEC, using a power matrix [9], based on the statistical properties from significant wave height ( $H_{m0}$ ), wave

direction ( $P_{kDir}$ ), and wave period(s) (energy ( $T_{m10}$ ), peak ( $T_{peak}$ )).

Economics refers predominately to the capital require for the development of a WEC. Majority of expenditure in a WEC is the Capital Expenditure (CapEx) which is a “one-off” cost. There is a diverse selection of WECs that are applicable at different depths, and have distinct construction requirements. For example a coastal WEC will require more CapEx for structures, while for a floating WEC at deeper waters large portion of CapEx correspond to moorings.

In the present study, a novel formulation to account for all different aspects, by reducing uncertainties and biases in wave energy is used. The formulation is the Selection Index for Wave Energy Deployments (SIWED) and aims to account for the metocean and extreme conditions as they affect energy production. The index does not exclude expert judgement, but is rather an unbiased tool for the selection of an appropriate WEC.

## II. MATERIALS & METHODS

The issue of selecting a WEC until now depend mostly on subjective expert judgement. Several authors have developed methodologies to select a WEC [10], [11] and/or the suitable region for deployment [12]–[18]. Such approaches focus only on specific resource or device characteristics. WEC production relies on resource availability, and it is often unique or within certain WEC(s) that share similar characteristics [19]. A high energy content does not indicate that it will be a appropriate location to install a WEC. Limitation of methodologies are that they either focus on resource, or only on energy production. They often do not investigate metocean trend interactions with energy production, wave stability, and omit to consider extreme events.

### A. Selection Index for Wave Energy Deployments (SIWED)

The Selection Index for Wave Energy Deployments (SIWED) (see Eq 1) [20], aims to reduce the uncertainties and bridge the power capabilities with resource dependence, providing an unbiased selection of WEC.

$$SIWED = \frac{e^{-CoV_{H_{m0}} \cdot CF}}{\frac{H_{EVA}}{H_{max}}} \quad (1)$$

In Eq. 1  $CoV_{H_{m0}}$  is the Coefficient of Variation,  $CF$  is the capacity factor,  $H_{EVA}$  the value of return waves based on extreme value analysis, and  $H_{max}$  is the maxima value of wave height from the dataset.

If a region has high variability is “penalised” by reducing expected power performance, since a higher volatility indicates a potential larger rate of change in metocean conditions. In the denominator, the ratio of estimated extreme return wave value over the maximum significant wave height, assists in quantifying the extent of which return values deviate from recorded maxima. This affects WEC survivability, and if the ratio is too high it will probably require more CapEx to ensure long-term and safe operation. Theoretically, SIWED can obtain values close to unity, the exponential

of  $CoV_{H_{m0}}$  goes from 1 to zero, with a zero  $CoV_{H_{m0}}$  i.e. no expected variation the term obtains a positive high value. In the event of a high  $CoV_{H_{m0}}$ , the exponential drops near 0. The CF of a device can also acquire values up to 1 (100%), although for renewable energies this is not realistic. Finally, if no variation exists then the expected return value will be close to the maximum  $H_{m0}$ , theoretically obtaining a value up to 1. Therefore, when SIWED obtains a higher value that indicate that the site and selected WEC have a better “match” and can deliver reliable power production.

Another important consideration when it comes to devices located in offshore sites, is their ability to survive extreme events. Estimation of wave return values are valuable for sizing of moorings, and strengthening work needed. Given the wide array of WECs that exist, return wave values can have a significant effect on CapEx.

The method for data preparation in this extreme value analysis is the Peak Over Threshold (POT), that can handle datasets of various temporal duration and lengths. Ensuring the recordings are not influenced by each other (identically independently distributed (i.i.d)) [21], [22], threshold was set with the 99.5<sup>th</sup> percentile of  $H_{m0}$  with a 72 hours windows. This choice took into account the available data and record its effects of the final data length [23], [24].

$$z_p = u + \frac{\hat{\sigma}}{\xi} \left[ (N \cdot \lambda_u)^\xi - 1 \right] \quad (2)$$

$$\lambda_u = \frac{k}{n_{years}} \quad (3)$$

In the above equations,  $N$  (investigated) is the return value in years,  $\lambda_u$  is the rate of threshold,  $\kappa$  is the length of dataset by POT,  $n_{years}$  is the sample duration, while  $\hat{\sigma}$  (scale) and  $\xi$  (shape) the Generalised Pareto Distribution (GPD) parameters. The return wave period is calculated by utilizing the fitted GPD parameters of each location and based on the reduced sample rate as estimated in Eqs 3 and 2 with the Maximum Likelihood. Most WECs have an expected lifetime of 20-25 years, so a return value of 30 year ( $H_{EVA} = H_{30}$ ) is deemed appropriate. This allows not to over-estimate extreme events and therefore increase CapEx.

### B. Area of Investigation and datasets

Metocean conditions for 35 years (1980-2014, end of 2014) are utilised to estimate all climate, power production and SIWED parameters. The datasets belong to a calibrated and validated two way nested system [25]–[27], based on the phased averaged Simulating WAVes Nearshore (SWAN), that was adapted to the region. The locations (see Figure 2) used in this study are obtained by the second nested higher fidelity domains for Greece, Italy, Spain, France, Tunisia, Libya with a spatial resolution  $\approx 2$  Kilometres.

The locations used in this study, represent depths  $50 \leq d \leq 150$  meter (m), thus the wave energy converters considered are applicable at nearshore to deep waters. Table I displays the representative WECs [20].





Fig. 2. Distribution of locations. (Google Earth, JS Dept of State Geographer, Data SIO, NOAA, US Navy, NGA, GEBCO, Image Landsat/Copernicus, 2021 Google.)

TABLE I  
WECs USED IN THIS STUDY

Name	Type
WaveStar (600 kW)	Point Absorber
F2HB (1000 kW)	Point Absorber
AquaBuoy (250 kW)	Point Absorber
AWS (2470 kW)	Point Absorber
BSHB (260 kW)	Point Absorber
FHBA (3619 kW)	Point Absorber
OceanTech (500 kW)	Attenuator
FOWC (2880 kW)	Oscillating Water Column
WaveDragon (7000 kW)	Overtopping

### III. RESULTS

The Mediterranean sea is home to several coastal nations, its general wave climate can be characterised as moderate to low, with sharp gradients of bathymetric changes. This suggests that the bathymetry around Mediterranean countries can be challenging, as changes can occur at close proximity to each other. Accessibility as a metric is defined as the percentage of time for which the conditions met at a location are equal or less than a specific threshold. This ensures that the deployment of vessels, crews, and offshore works is performed under safe conditions. In the Mediterranean, near the coastlines and below 150 m depth accessibility is  $\geq 80\%$ , see Figure 3. Deeper water locations  $\geq 200$  meter depth show reduced levels, however, currently WEC and other offshore renewables are not expected to be deployed at such conditions.

For all locations, key metocean conditions were firstly estimated (see Table II), locations P1-P10 belong to the Hellenic sea space. The region is at the North East part of the Mediterranean and can be divided into

4 regions, which is at the North Aegean (P1,P8,P6,P7), the Central Aegean (P2,P9-P11)), the South Aegean (P3,P4,P5,P12,P13) and the Ionian Sea. In terms of  $H_{m0}$  mean values for most locations are  $\leq 1$  meter, however, this does not mean that their conditions are always low. In fact, the standard deviation and coefficient of variation indicate that the wave conditions have large volatility. In terms of maxima, almost all locations have  $H_{max} \geq 5.5$  meters, with Central Aegean locations reaching up to 7.79 meters. Throughout extracted locations mean  $P_{wave}$  is 3.51 kW/m, with maxima values  $\geq 12$  kW/m.

TABLE II  
DESCRIPTIVE METOCEAN STATISTICS FOR LOCATIONS IN GREECE

Location	$H_{m0}$	$H_{max}$	$H_{STD}$	$P_{wave}$
				kW/m
		meters		
Athos (P1)	0.81	6.82	0.79	3.89
Attika (P2)	0.62	5.60	0.52	1.71
Crete1 (P3)	0.80	6.26	0.64	3.54
Crete2 (P4)	1.05	6.65	0.75	5.28
E1mea (P5)	0.72	6.20	0.61	2.87
Eubolia (P6)	0.67	6.55	0.68	2.96
Kythnos (P7)	0.86	6.26	0.73	3.68
Lesvos (P8)	0.89	6.99	0.77	4.06
Mykonos (P9)	0.88	5.18	0.61	2.87
Naxos (P10)	0.79	4.21	0.60	2.44
Paros (P11)	0.86	4.50	0.63	2.89
Pylos (P12)	0.94	7.79	0.73	4.74
Santorini (P13)	1.01	5.84	0.71	4.64

Locations in the Italian Seas (P15-37, P52) (see Table III) have similar mean  $H_{m0}$  with South-West locations being have the highest. Variation and standard deviation of the conditions indicate changes annually, with highest waves ( $H_{max}$ ) values  $\approx 1$  meter higher than Greece. The 99<sup>th</sup> percentiles indicate that all location



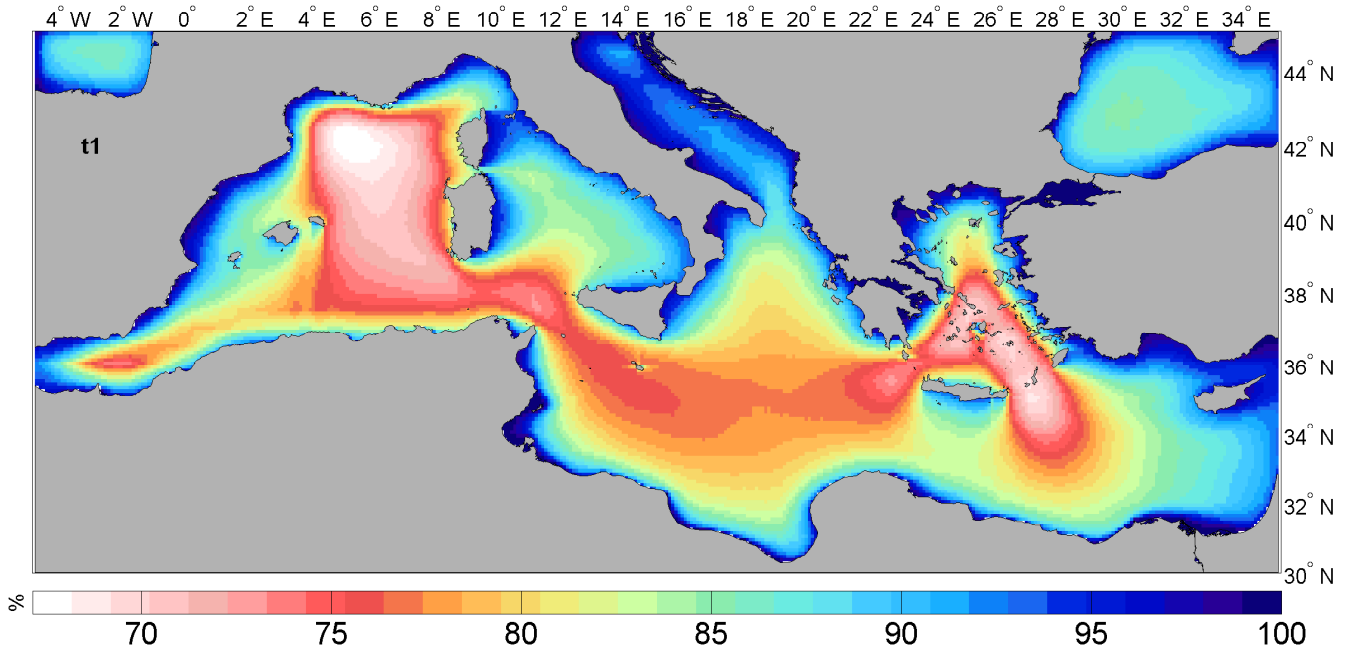


Fig. 3. Accessibility for  $H_{m0} \leq 1.5$  meters (m).

are below 4.13 meters. However, their most maxima are  $\geq 6$  meter with the highest value being at 8.15 meters (P24). That location has a big disparity between mean and max value, reaffirming the volatility of the resource. Wave energy content is in most cases slightly  $\geq 4$  kW/m.

TABLE III  
DESCRIPTIVE METOCEAN STATISTICS FOR LOCATIONS IN ITALY

Location	$H_{m0}$	$H_{max}$	$H_{STD}$	$P_{wave}$
	meters			kW/m
Catania (P14)	0.37	4.66	0.39	1.02
Cetraro (P15)	0.60	7.49	0.56	2.50
Desil (P16)	1.08	7.65	0.86	6.86
GasilA (P17)	0.95	6.20	0.71	4.95
GasilB (P18)	1.05	6.86	0.78	6.06
Italy1 (P19)	0.84	6.22	0.67	4.10
Italy2 (P20)	0.80	6.54	0.72	4.13
Italy3 (P21)	0.68	4.97	0.51	2.50
Italy4 (P22)	0.81	5.62	0.58	3.26
Italy5 (P23)	0.50	6.51	0.50	1.78
Italy6 (P24)	0.59	8.15	0.57	2.55
Italy7 (P25)	0.62	6.83	0.56	2.24
Mazzaro (P26)	0.93	6.74	0.75	5.12
Palermo (P27)	0.93	6.74	0.75	5.12
Ronmaz (P28)	0.93	6.74	0.75	5.12
Tauro (P29)	0.51	7.74	0.53	1.97
ItalyAl (P52)	0.91	7.19	0.87	6.56

Seldom explored locations in Tunisia and Libya are also examined (see Table IV).  $H_{max}$ , especially near the Straits of Messina are above 7 meters, with most locations in Libya showing similar levels of maxima. Mean conditions follow the patterns in Greece and Italy. However, due to positioning, especially for Libya, most swells are dissipated and dispersed with 99<sup>th</sup> percentiles below 2.7 meters. Wave power is only highest at the Northern Tunisian location (P30) with a mean value of 6.16 kW/m, while at the remainder locations in the regions is  $\approx 3.35$  kW/m.

Spain and France have a diverse resource, in terms of mean  $H_{m0}$  across all examined locations the lowest

TABLE IV  
DESCRIPTIVE METOCEAN STATISTICS FOR LOCATIONS IN TUNISIA & LIBYA

Location	$H_{m0}$	$H_{max}$	$H_{STD}$	$P_{wave}$
	meters			kW/m
Tunisia1 (P30)	1.04	7.25	0.81	6.16
Tunisia2 (P31)	0.63	4.14	0.42	1.69
Libya1 (P32)	0.87	6.95	0.58	3.94
Libya2 (P33)	0.89	7.34	0.65	4.58
Libya3 (P34)	0.86	5.53	0.49	3.24
Libya4 (P35)	0.86	5.53	0.49	3.24
Libya5 (P36)	0.84	5.32	0.49	3.38

conditions are found in P38-P39 (see Table V). French Mediterranean locations also have lower means well below 0.8 meter. However, variations in the conditions are higher than expected, P45 experiences one of the highest  $H_{max}$  of 8.05 meters with a mean of only 1.01 meters, with 99<sup>th</sup> percentile being at 4.49 meters. Spanish locations have the lowest standard deviation amongst the examined locations; however, the coefficient of variation is similar to Greece and Italy.

Power production has been estimated for every year and for each location, considering the bivariate distributions. All WECs are tested at all locations; however, consistently the following four converters are most preferred: Wavestar, F2HB, Aquabuoy and OceanTech. In Figure 5 the results for both capacity factor and SIWED are displayed for all marine locations in Greece. In terms of CF, Wavestar is the best WEC for all locations, except locations P9-P11 (Table II) in Central Aegean and P13 (Santorini in South Aegean), where OceanTech is better. However, if all the metocean interactions, variability and extremes are considered long term then WaveStar out performs even at location where power performance favours OceanTech, see Figure 5.

Locations at Italy, Tunisia, Libya, Spain and France show similar behaviour in terms of favourable WECs, see Figures 6-9. In Italy (Figure 6) expected power pro-

TABLE V  
DESCRIPTIVE METOCEAN STATISTICS FOR LOCATIONS IN SPAIN & FRANCE

Location	$H_{m0}$	$H_{max}$	$H_{STD}$	$P_{wave}$
				$kW/m$
Alghero (P37)	1.02	7.83	0.97	8.03
Barca1 (P38)	0.50	3.85	0.38	1.27
Barca2 (P39)	0.50	3.77	0.37	1.24
Capder (P40)	0.81	6.16	0.62	3.76
Palamos (P41)	0.63	5.16	0.48	2.09
Spain1 (P42)	0.46	3.60	0.31	0.93
Spain2 (P43)	0.48	5.10	0.39	1.28
Spain3 (P44)	0.86	7.21	0.71	4.50
Spain4 (P45)	1.01	8.05	0.91	7.13
Fr61191 (P46)	0.49	6.08	0.43	1.21
Fr61284 (P47)	0.65	5.50	0.49	1.81
Fr61289 (P48)	0.74	5.25	0.56	2.43
Fr6190 (P49)	0.47	5.57	0.43	1.16
France1 (P520)	0.47	5.63	0.42	1.17
France2 (P51)	0.67	5.77	0.51	1.95

duction is less than Greece with higher mean CF at P18 equal to 16.5%. For most locations WaveStar is more suitable followed by OceanTech, both  $6\% \geq 16.5\%$ . Lowest CF ( $\leq 2\%$ ) is obtained by a large overtopping device. For Tunisia and Libya (Figure 7) similar CF performance with no deviations in SIWED. Spanish locations have an expected power performance below 20%, while for most locations Wavestar is still the preferred option. In Alghero AWS is the next most suitable WEC; however, if the variation and extremes ratios are factored in then OceanTech becomes again the second most suitable alternative. A similar mismatch is observed at P48 (Figure 9)) where the Ocean-Tech outperforms all devices. Nevertheless, in terms of overall suitability the optimal selection is Wavestar.

#### IV. DISCUSSION

With wave energy still being an un-tapped resource, it is important to examine critically the potential for power generation to each area separately. High energy conditions at the Atlantic coastlines carry the largest energy potential, this does not, however, preclude the utilisation of wave energy for moderate resources. On the contrary, this should be accompanied by a selection process that will deliver fitted solutions to a different statistical metocean environment.

The coastlines around most of the Mediterranean countries indicate a high degree ( $\geq 90\%$ ) of accessibility, that can be highly beneficial for deployment, maintenance and operation activities. The higher accessibility indicates that in the Basin, most conditions are less than 4 meters, which in turn suggests that the probability of joint distributions will be different than the Atlantic. Therefore, WECs that are developed for highly energetic environments are not suitable.

In Greece Wavestar is most suitable for nearly half of the examined locations, with the other half indicating OceanTech. Using SIWED allows us to assess the long-term expected behaviour of the device, and how it will perform matching resource variability and its relationship to extremes. This in fact changes the distribution and indicates that the resource variability over the long term is more suited for operating the Wavestar device. Figure 4 shows the spatial distribution of CF over the

Greek territorial water, for Wavestar, the device that was deemed most relevant through the use of SIWED (see Figure ??).

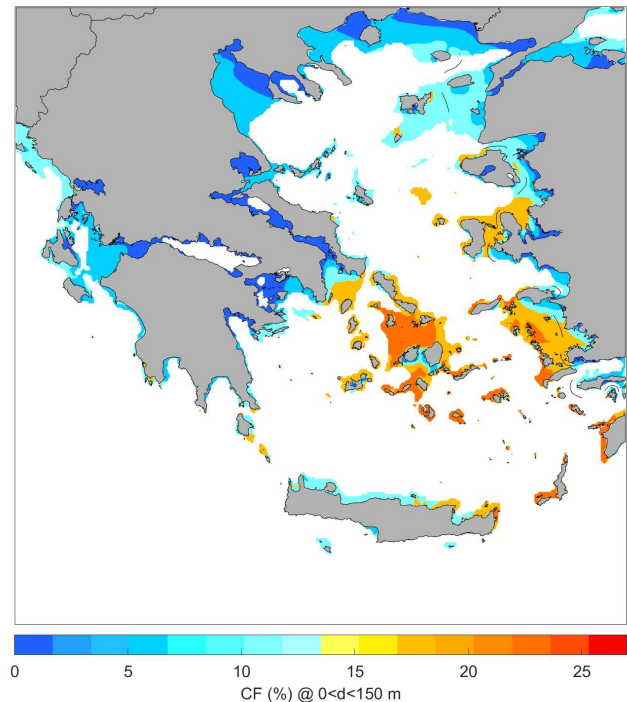


Fig. 4. Spatial CF distribution of most suitable WEC for Greece, considering SIWED selection.

The use of SIWED also showed that a high CF does not mean a good location match. An example of this is the power performance in Alghero (see Figure 8) where the second best WEC is the AWS followed by Aquabuoy. However, when the metocean conditions are taken into account the OceanTech performs better with less variability in expected power production. The importance of FR61284 (see Figure 9), and ItalyAl (see Figure 8) is that the variability expected reduce the effectiveness of most wave energy converters, indicating that alternatives differ per locations.

#### V. CONCLUSIONS

This study aimed to analyse the suitability of several WECs under different locations in the Mediterranean Sea, with the introduction of a novel index. The Mediterranean Basin is often overlooked when it comes to wave energy, however, the high levels of accessibility beneficial for offshore developments. The overall resource potential is from 3.8-6 kW/m at locations of water depth  $\leq 150$  meters. Wave conditions are described by mean  $H_{m0}$  values of less than 1 meter, with dataset  $H_{max}$  at 8.15 meters and mean  $H_{max}$  of 6.12 meters. Highest waves are encountered at the Balearics and Sardinia, while at Greece the South West and central Aegean region encounter highest waves with values of  $H_{max}$  equal to 7.5-7.8 meters. This large variation in wave conditions is also responsible for large variations in deeper locations at the Mediterranean.

The conditions found across all locations favour small scale WECs, often in terms of capacity factors

$\geq 12\text{-}15\%$  up to  $30\%$ . Common characteristics of these WECs are their small rated capacity, and subsequently range of operations. From the comparison, it is evident that the principle of operation should not be the main criterion for selection. In this study three different WECs based on different principles can be considered viable. Findings seem to be in agreement with the suggestion by Falnes that “small is beautiful” [28]. Most favourable devices are  $\leq 700$  kW and in comparison with larger capacity WEC are described by smaller dimensions. Among the WECs considered in the present investigation a point absorber was the most suitable across most locations, followed by an attenuator. Both of the suggested solutions have a common characteristic; namely they can both be considered as low resource devices. In both cases the maxima nameplate capacity of 600 kW (Wavestar) and 500 kW (OceanTech) are obtained for  $H_{m0}$  equal to 3 and 2.5 meters, respectively.

When metocean variations and extremes conditions are factored in even a high CF device is not the optimal. With long-term climate variations considered WaveStar becomes the preferred device, due to its operational matrix more adaptive to the Mediterranean wave climate. Fine balances between resource, WEC and extremes should also be part as main selection criteria, as they affect energy production and costs.

With the suggested approach all potential WEC technologies can be assessed by also taking into account the metocean condition variability, and extreme events, resulting to a more custom “resource-to-production” approach. The interactions between metocean conditions and potential power performance, are the vital components for selecting suitable region. The index can provide a robust approach to determine the optimal WEC for a location/region/area. SIWED provides an “optimal” selection, by considering long-term metocean variations that have negative effects on annual power production, and CapEx.

#### ACKNOWLEDGEMENT

The authors would like to acknowledge the WE-CANet travel grant to the 2<sup>nd</sup> General Assembly at Porto in 2019, that made possible the start of this research stream.

#### REFERENCES

[1] IPCC, “Global Warming of 1.5 C, an IPCC special report on the impacts of global warming of 1.5 C above pre-industrial levels and related global greenhouse gas emission pathways, in the context of strengthening the global response to the threat of climate change.” International Panel on Climate Change, Tech. Rep., 2018. [Online]. Available: <http://www.ipcc.ch/report/sr15/>

[2] United Nations, “Adoption of the Paris Agreement,” United Nations Framework Convention on Climate Change, Paris, Tech. Rep. December, 2015. [Online]. Available: <http://unfccc.int/resource/docs/2015/cop21/eng/l09r01.pdf>

[3] JRC, *The Strategic Energy Technology (SET) Plan*. European Commission, 2017. [Online]. Available: <https://publications.europa.eu/en/publication-detail/-/publication/771918e8-d3ee-11e7-a5b9-01aa75ed71a1/language-en/format-PDF/source-51344538>

[4] E. Commission, “National energy and climate plans (necps),” 2019. [Online]. Available: <https://ec.europa.eu/energy/en/topics/energy-strategy-and-energy-union/governance-energy-union/national-energy-climate-plans#content-heading-0>

[5] H. Lund, “Large-scale integration of optimal combinations of PV, wind and wave power into the electricity supply,” *Renewable Energy*, vol. 31, no. 4, pp. 503–515, apr 2006. [Online]. Available: <http://linkinghub.elsevier.com/retrieve/pii/S0960148105000893>

[6] D. Friedrich and G. Lavidas, “Evaluation of the effect of flexible demand and wave energy converters on the design of Hybrid Energy Systems,” *Renewable Power Generation*, vol. 12, no. 7, 2017. [Online]. Available: <http://digital-library.theiet.org/content/journals/10.1049/iet-rpg.2016.0955>

[7] N. Tzellos, E. Loukogeorgaki, E. Anastasiou, and I. K. Chatjigeorgiou, “Performance of an oblate spheroidal heaving wave energy converter,” in *Proceedings of the Thirtieth (2020) International Ocean and Polar Engineering Conference Shanghai, China, October 11-16, the International Society of Offshore and Polar Engineers (ISOPE)*, 2020.

[8] E. Loukogeorgaki, I. Boufidi, and I. K. Chatjigeorgiou, “Performance of an array of oblate spheroidal heaving wave energy converters in front of a wall,” *Water*, vol. 12, no. 1, 2020. [Online]. Available: <https://www.mdpi.com/2073-4441/12/1/188>

[9] A. Babarit, J. Hals, M. Muliawan, A. Kurniawan, T. Moan, and J. Krokstad, “Numerical benchmarking study of a selection of wave energy converters,” *Renewable Energy*, vol. 41, pp. 44–63, may 2012. [Online]. Available: <http://linkinghub.elsevier.com/retrieve/pii/S0960148111005672>

[10] G. Lavidas, V. Venugopal, and D. Friedrich, “Wave energy extraction in Scotland through an improved nearshore wave atlas,” *International Journal of Marine Energy*, vol. 17, pp. 64–83, 2017. [Online]. Available: <http://dx.doi.org/10.1016/j.ijome.2017.01.008>

[11] S. Bozzi, G. Besio, and G. Passoni, “Wave power technologies for the Mediterranean offshore: Scaling and performance analysis,” *Coastal Engineering*, vol. 136, no. September 2017, pp. 130–146, 2018. [Online]. Available: <http://linkinghub.elsevier.com/retrieve/pii/S0378383917304908>

[12] G. Hagerman, “Southern New England Wave Energy Resource Potential,” in *Proceedings Building Energy*, no. March, 2001.

[13] A. Akpınar and M. h. Kömürçü, “Wave energy potential along the south-east coasts of the Black Sea,” *Energy*, vol. 42, no. 1, pp. 289–302, jun 2012. [Online]. Available: <http://linkinghub.elsevier.com/retrieve/pii/S0360544212002605>

[14] B. Kamranzad, A. Etemad-Shahidi, and V. Chegini, “Developing an optimum hotspot identifier for wave energy extracting in the northern Persian Gulf,” *Renewable Energy*, vol. 114, pp. 59–71, 2017. [Online]. Available: <http://dx.doi.org/10.1016/j.renene.2017.03.026>

[15] A. Akpınar, H. Jafali, and E. Rusu, “Temporal Variation of the Wave Energy Flux in Hotspot Areas of the Black Sea,” *Sustainability*, vol. 11, no. 3, p. 562, 2019. [Online]. Available: <http://www.mdpi.com/2071-1050/11/3/562>

[16] B. Kamranzad, P. Lin, and G. Iglesias, “Combining methodologies on the impact of inter and intra-annual variation of wave energy on selection of suitable location and technology,” *Renewable Energy*, vol. 172, pp. 697–713, 2021. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0960148121004183>

[17] M. Şan, A. Akpınar, B. Bingölbali, and M. Kankal, “Geo-spatial multi-criteria evaluation of wave energy exploitation in a semi-enclosed sea,” *Energy*, vol. 214, p. 118997, 2021. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0360544220321046>

[18] F. Flocard, D. Ierodiakonou, and I. R. Coghlan, “Multi-criteria evaluation of wave energy projects on the south-east australian coast,” *Renewable Energy*, vol. 99, pp. 80–94, 2016. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0960148116305602>


[19] G. Lavidas, A. Agarwal, and V. Venugopal, “Availability and Accessibility for Offshore Operations in the Mediterranean Sea,” *Journal of Waterway, Port, Coastal, and Ocean Engineering*, vol. 144, no. 6, pp. 1–13, 2018. [Online]. Available: [https://ascelibrary.org/doi/full/10.1061/\(ASCE\)WW.1943-5460.0000467](https://ascelibrary.org/doi/full/10.1061/(ASCE)WW.1943-5460.0000467)

[20] G. Lavidas, “Selection index for Wave Energy Deployments (SI-WED): A near-deterministic index for wave energy converters,” *Energy*, vol. 196, p. 117131, apr 2020.




- [21] Y. Goda, *Random seas and desing of maritime structures*, 2nd ed. World Scientific Co.Pte.Ltd., 2000.
- [22] S. Coles, *An Introduction to Statistical modelling of extreme values*. Springer Series in Statistics, 2001.
- [23] A. Agarwal, V. Venugopal, and G. P. Harrison, "The assessment of extreme wave analysis methods applied to potential marine energy sites using numerical model data," *Renewable and Sustainable Energy Reviews*, vol. 27, pp. 244–257, nov 2013. [Online]. Available: <http://linkinghub.elsevier.com/retrieve/pii/S1364032113004401>
- [24] M. Mathiesen, Y. Goda, P. J. Hawkes, E. Mansard, M. J. Martin, E. Peltier, E. F. Thompson, and G. P. van Vledder, "Recommended practice for extreme wave analysis," *Journal of Hydraulic Research*, vol. 32, no. 6, pp. 803–814, 1994.
- [25] G. Lavidas, V. Venugopal, and A. Agarwal, "Long-Term Evaluation of the Wave Climate and Energy Potential in the Mediterranean Sea," in *4th IAHR Europe Congress 27th July - 29th July*, S. Erpicum, B. Dewals, P. Archambeau, and M. Pirotton, Eds., Liege, 2016, pp. 247–253.
- [26] G. Lavidas and V. Venugopal, "A 35 year high-resolution wave atlas for nearshore energy production and economics at the Aegean Sea," *Renewable Energy*, vol. 103, pp. 401–417, 2017. [Online]. Available: <https://doi.org/10.1016/j.renene.2016.11.055>
- [27] —, "Wave Energy Resource Evaluation and Characterisation for the Libyan Sea," *International Journal of Marine Energy*, vol. 18, pp. 1–14, 2017. [Online]. Available: <http://linkinghub.elsevier.com/retrieve/pii/S2214166917300280>
- [28] J. Falnes and J. Hals, "Heaving buoys, point absorbers and arrays," in *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, vol. 370, no. 1959. Royal Society, jan 2012, pp. 246–277.

## APPENDIX

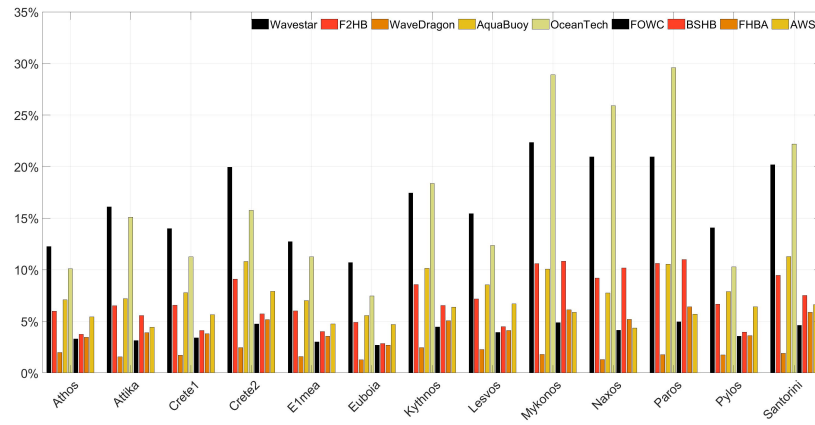

(a) CF

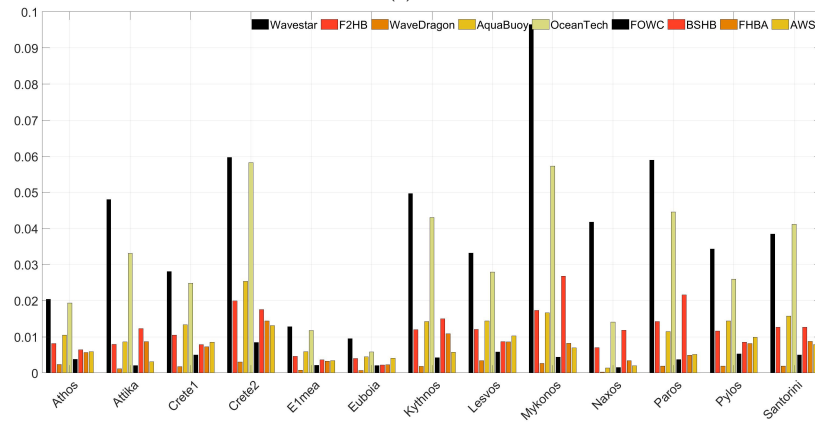

(b) SIWED

Fig. 5. Greece points estimation of for all WECs.

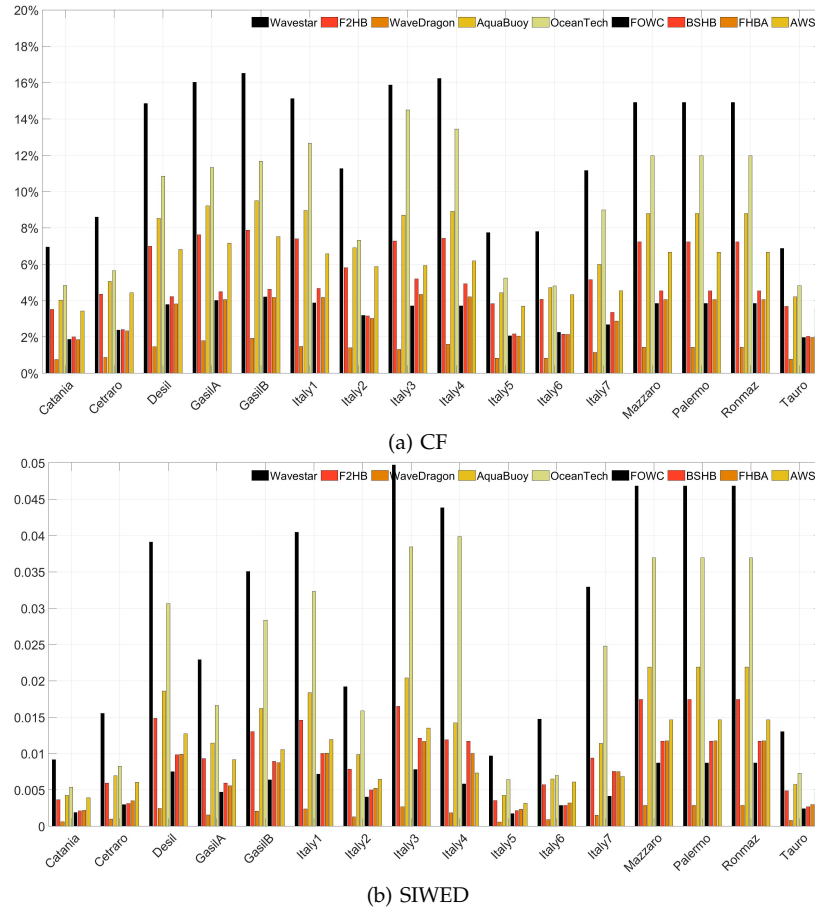


Fig. 6. Italy points estimation of for all WECs.



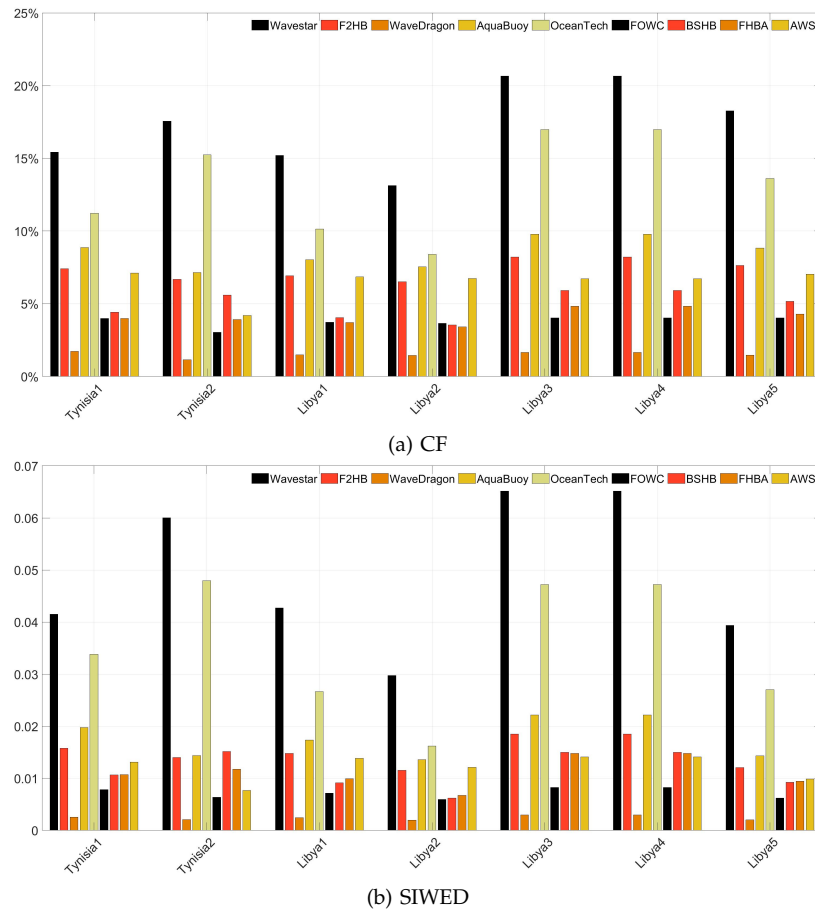


Fig. 7. Tunisia and Libya points estimation of for all WECs.



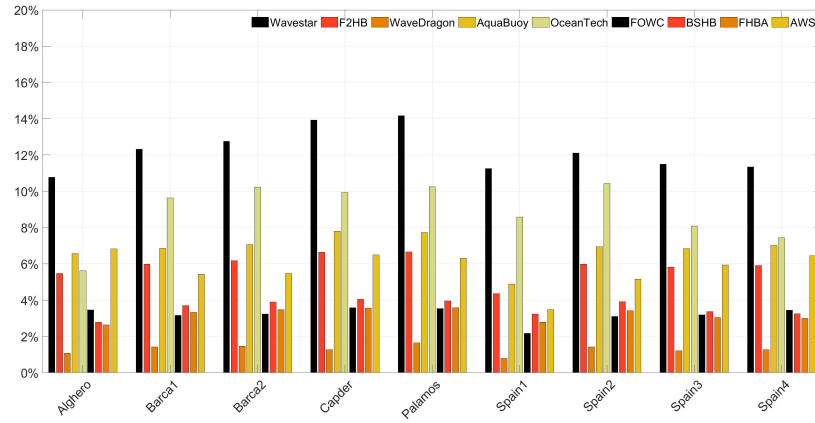


(a) CF

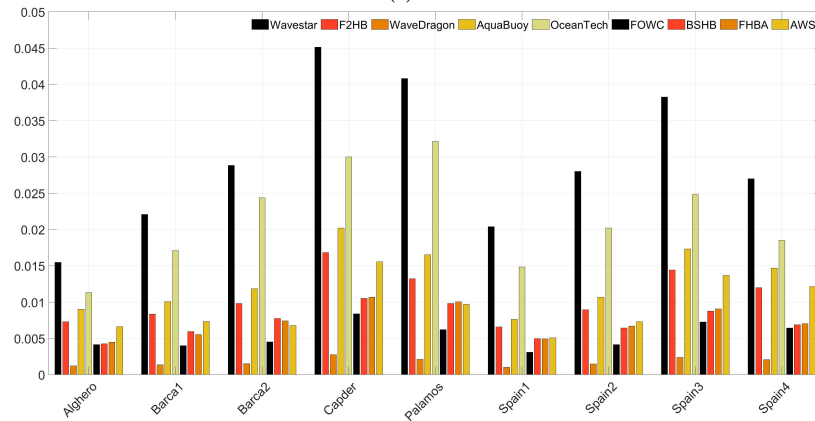


(b) SIWED

Fig. 8. Spain points estimation of for all WECs.

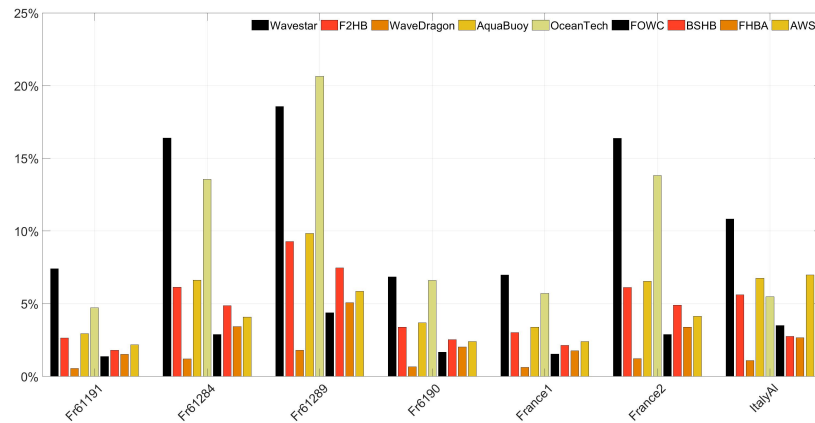

(a) CF

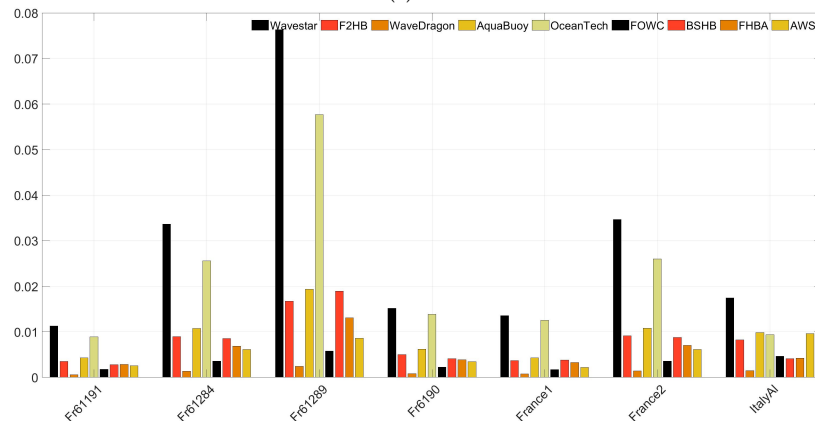

(b) SIWED

Fig. 9. France points estimation of for all WECs.