

Findings in the calculation of solar irradiance in urban areas using several GIS tools

León Sánchez, C.A.; Agugiaro, G.; Stoter, J.E.

Publication date

2023

Document Version

Final published version

Published in

Proceedings of the 2nd Research Day on Digitalization of the Built Environment

Citation (APA)

León Sánchez, C. A., Agugiaro, G., & Stoter, J. E. (2023). Findings in the calculation of solar irradiance in urban areas using several GIS tools. In *Proceedings of the 2nd Research Day on Digitalization of the Built Environment* (pp. 22-24). Technische Universiteit Eindhoven.

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.


Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

PROCEEDINGS OF THE 2nd RESEARCH DAY ON DIGITALIZATION OF THE BUILT ENVIRONMENT

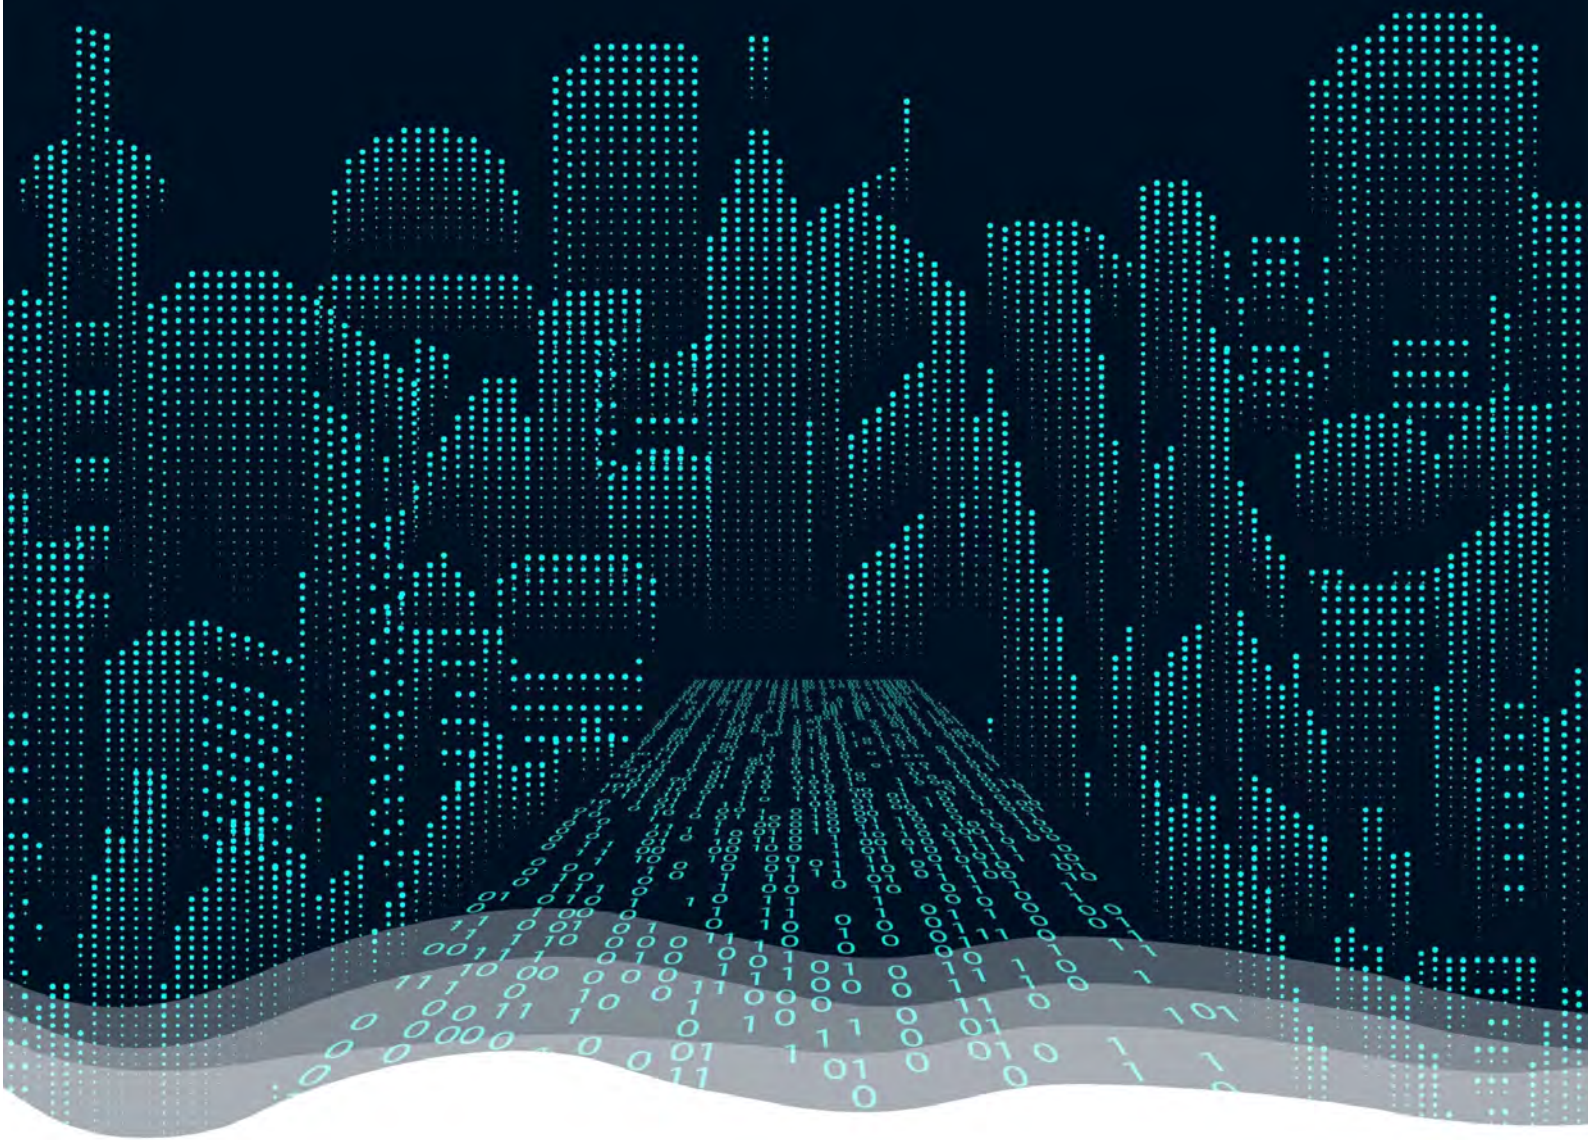

27-MARCH-2023

EINDHOVEN

THE NETHERLANDS

EDITED BY:
EKATERINA PETROVA
PIETER PAUWELS

TU/e

4TU.Built Environment



**2nd 4TU/14UAS Research Day on
Digitalization of the Built Environment**

**Proceedings of the 2nd 4TU/14 UAS
Research Day on
Digitalization of the Built Environment
March 27, 2023
Eindhoven, the Netherlands**

Edited by

Dr. Ekaterina Petrova, Eindhoven University of Technology

Dr. Pieter Pauwels, Eindhoven University of Technology

Published at Eindhoven University of Technology, Eindhoven, the Netherlands.

To cite this publication:

Petrova, E. & Pauwels, P. (2023). *Proceedings of the 2nd 4TU/14UAS Research Day on Digitalization of the Built Environment*, March 27, 2023, Eindhoven, the Netherlands.

A catalogue record is available from the Eindhoven University of Technology Library.

ISBN: 978-90-386-5717-2

All Rights Reserved





Findings in the calculation of solar irradiance in urban areas using several GIS tools

Camilo León-Sánchez, Delft University of Technology, c.a.leonsanchez@tudelft.nl

Giorgio Agugiaro, Delft University of Technology, g.agugiaro@tudelft.nl

Jantien Stoter, Delft University of Technology, j.e.stoter@tudelft.nl

Abstract – Current GIS software offer tools to perform the solar irradiance calculations. However, these computations based their work on data assumptions or generalisations to speed up their processing time. In this work, a method is shown to perform the calculation using very high and very low spatial resolution open datasets. The results show that there too detailed raster data like 50cm horizontal spatial resolution DSM does not improve the calculations compared to lower resolution datasets.

In 2018, at least 55% of the global population lives urban areas and by 2023 it will increase to 60% (United Nations, 2018). Wrong quantification of the current and expected energy demand of buildings, will lead to erroneous decisions and misguided planning for energy supply. Solar gains play a major role in any energy demand simulation. For that reason, it is important to have a precise calculation of the solar radiation for a given area of interest. This work shows a method to perform the solar radiation using raster open datasets in the Netherlands and three GIS software tools. Liang et al. (2020) proposes a method to extend the GRASS GIS r.sun model by feeding it with 3D data including 3DCity models and photogrammetric meshes, Gianelli (2021) performs a solar analysis on buildings of favelas in Sao Paulo using several software tools and different input format datasets (raster and 3D semantic City Models)

The proposed method includes the use of digital surface models (DSM) in a raster format at different spatial resolutions. Our purpose is to test the influence of the spatial resolution in the solar irradiation simulations. We use raster-based DSM with different spatial resolutions, the Netherlands current elevation database (Actueel Hoogtebestand Nederland – AHN) at 50cm and 5m (stuurgroep AHN, 2019) and the European Digital Elevation Model (EU-DEM) (European Environment Agency (EEA), 2016). The study is located at the weather station of Heino in The Netherlands. Since we are working with several data sources and different spatial resolutions, we analyse the horizon profile from the weather station at a systematic interval distance to identify changes in the Orography. Once the right distance is found, we evaluate the influence of large distance obstacles in the horizon. The resulting input DSM is used as an input for several Solar Irradiance GIS software tools, this is the case of ArcGIS (esri, 2023), GRASS (Hofierka et al., 2007), SAGA GIS (Conrad, 2010). Simulation results are compared against typical year data open data available by the open climate project (Lawrie & Crawley, 2019) which offers weather data for the whole planet.

First, we calculate the sky view for the very height resolution DSM. **Error! Reference source not found.** shows the resulting sky view of each of the input datasets, from left to right the spatial resolution decreases. Each of the plots contains the same colour palette going from cyan (closest) to magenta (furthest). For the point of interest, the highest obstacle is in less than 200m with an azimuth of 156° and an elevation angle of 9° (**Error! Reference source not found.A**). **Error! Reference source not found.B** and **Error! Reference source not found.C** give show



the orography of the up to 18Km and 103Km for the AHN3 5m and Copernicus datasets respectively. For the latter two plots, we remove from the analyses the area covered by the very-high resolution DSM. This indicates that the weather station is not affected by far away obstacles.

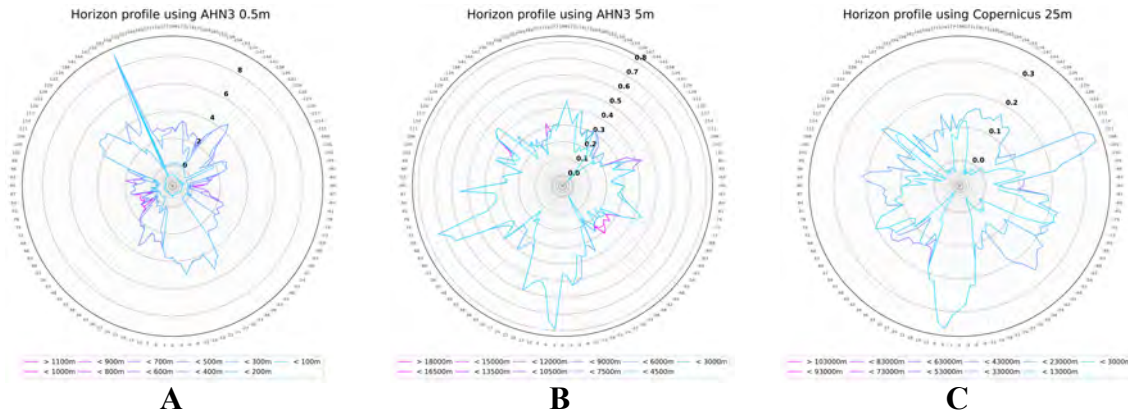


Figure 5. Horizon profile (Sky view) for the input datasets.

Since there is no change from 1.200m (**Error! Reference source not found.**A), we decided to use as input DSM for the solar irradiance calculations a square raster with a side size of 1200m. We decide to test the influence of the spatial resolution in the calculations, for that reason we resample the 50cm dataset to 1m, which is still a very-high resolution dataset.

Error! Reference source not found. shows the year profile for each of the simulation tools for a typical year in the selected spatial resolutions.

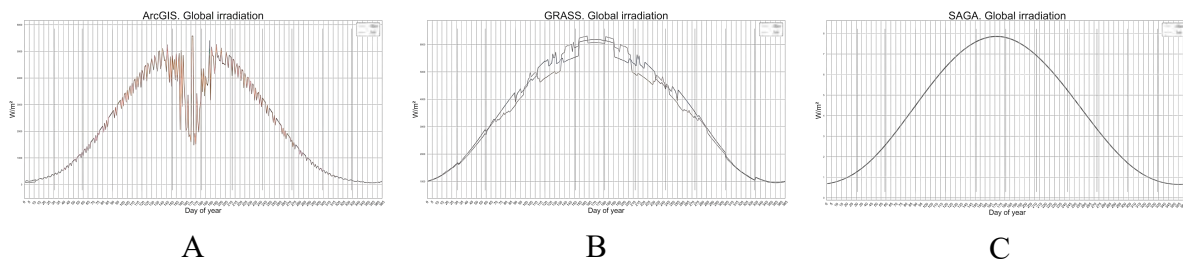


Figure 6. Daily global irradiation by software tool

The vertical thicker lines in **Error! Reference source not found.** indicate the starting day of the month. Despite of ArcGIS, which only request the DSM, we used as input dataset for the Linke turbidity factor the dataset published by Solar radiation Data (SoDa, 2010). Since this is a very low-resolution dataset of $1/12^\circ$, we extract the value at each pixel location of the input DSM so there is no difference in the input data resolution when the software tools perform their calculations.

Error! Reference source not found. shows the line plot for the global irradiance values of the weather station against the results obtained from the simulation tools.

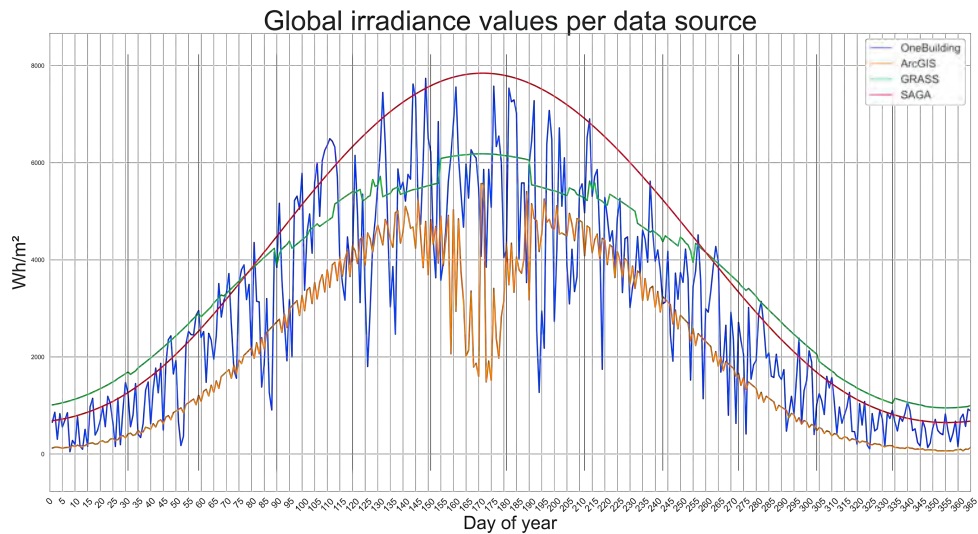


Figure 7. Daily global irradiance values for the weather station and simulation tools

The results obtained by the calculation using ArcGIS shows that there is practically no difference between the results obtained using 50cm or 1m spatial resolution DSMs, which is not the case of the other two simulation tools. ArcGIS values are the lowest one of the three while SAGA produces the highest values. It is possible to see as well that SAGA do not consider weather data for its calculations since the results are quite normalised, not showing the normal cloud behaviour in the sky.

References

- Conrad, C. (2010). Tool Potential Incoming Solar Radiation. SAGA-GIS Tool Library Documentation (v8.4.2). https://saga-gis.sourceforge.io/saga_tool_doc/8.4.2/ta_lighting_2.html
- esri. (2023). Area Solar Radiation (Spatial Analyst). <https://pro.arcgis.com/en/pro-app/latest/tool-reference/spatial-analyst/area-solar-radiation.htm>
- European Environment Agency (EEA). (2016). European Digital Elevation Model (EU-DEM), version 1.1. <http://land.copernicus.eu/pan-european/satellite-derived-products/eu-dem/eu-dem-v1.1/view>
- Gianelli, D. (2021). Solar analysis on buildings of favelas in Sao Paulo to estimate PV potential. TUDelft.
- Hofierka, J., Suri, M., & Huld, T. (2007). r.sun. GRASS GIS 8.2.2dev Reference Manual. <https://grass.osgeo.org/grass82/manuals/r.sun.html>
- Lawrie, L. K., & rawley, D. B. (2019). Development of Global Typical Meteorological Years (TMYx). <http://climate.onebuilding.org>
- Liang, J., Gong, J., Xie, X., & Sun, J. (2020). Solar3D: An open-source tool for estimating solar radiation in urban environments. *ISPRS International Journal of Geo-Information*, 9(9). <https://doi.org/10.3390/ijgi9090524>
- SoDa. (2010). LINKE TURBIDITY (TL) FACTOR WORLDWIDE. <https://www.soda-pro.com/help/general-knowledge/linke-turbidity-factor>
- stuurgroep AHN. (2019). Het Actueel Hoogtebestand Nederland (AHN3). <https://app.pdok.nl/ahn3-downloadpage/>
- United Nations. (2018). The World's Cities in 2018—Data Booklet. In *World Urbanization Prospects: The 2018 Revision*.