



Delft University of Technology

## 3D-impaction printing of porous layers

van Ginkel, H.J.; Roels, P.; Boeije, M.F.J.; Pfeiffer, T.V.; Vollebregt, S.; Zhang, Kouchi; Schmidt-Ott, A.

**Publication date**

2020

**Document Version**

Accepted author manuscript

**Citation (APA)**

van Ginkel, H. J., Roels, P., Boeije, M. F. J., Pfeiffer, T. V., Vollebregt, S., Zhang, K., & Schmidt-Ott, A. (2020). *3D-impaction printing of porous layers*. Abstract from European Aerosol Conference 2020, Aachen, Germany.

**Important note**

To cite this publication, please use the final published version (if applicable).

Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.

We will remove access to the work immediately and investigate your claim.

*This work is downloaded from Delft University of Technology.*

*For technical reasons the number of authors shown on this cover page is limited to a maximum of 10.*

## 3D-impaction printing of porous layers

H.J. van Ginkel<sup>2</sup>, P. Roels<sup>3</sup>, M.F.J. Boeije<sup>3</sup>, T.V. Pfeiffer<sup>3</sup>, S. Vollebregt<sup>2</sup>, G.Q. Zhang<sup>2</sup>, A. Schmidt-Ott<sup>1,3</sup>

<sup>1</sup>Faculty of Applied Sciences, Delft University of Technology, NL-2629 HZ Delft, The Netherlands

<sup>2</sup>Faculty of Electrical Engineering, Mathematics & Computer Science, Delft Univ. of Technology, Netherlands

<sup>3</sup>VSParticle B.V., Molengraaffsingel 10, NL-2629 JD Delft, The Netherlands

Keywords: 3D printing, nanoporous, catalysts, sensors, SERS

Presenting author email: H.J.vanGinkel@tudelft.nl

Porous layers composed of nanoparticles (NPs) have a wide range of applications including catalysts and (chemical) sensors. In addition, such layers are strong candidates for thermoelectric materials. In electronics, porous metal layers can be used as resistive elements or, in a strongly sintered/coalesced form, as electrical connections. All these application domains will profit strongly from a NP printing process which is flexible with respect to i) the composition of the NPs and ii) the possibility of composing arbitrary mixtures of different NPs (external mixtures).

The 3D NP printer we report on provides this versatility. It is a combination of the VSPARTICLE G1 spark ablation NP generator (Boeije et al., 2020) with an impactor equipped with an xyz stage. The G1 provides unagglomerated metal or semiconductor NPs of an adjustable size between 0.5 and 10 nm. Any alloy can be produced by using alloyed electrodes or electrodes of different materials in the G1. A spatial resolution of a few tens of microns would be feasible by applying focused impaction (Girshick, 2008). Our impactor is usually operated in the domain of hypersonic impaction, where a gas stream at  $P_1 = 1$  bar is accelerated into a vacuum of about  $P_0 = 0.3$  mbar through a cylindrical nozzle ( $d = 0.1$  mm) in a 0.3 mm thick plate and reaches values above Mach 5. The substrate is placed at a distance  $L$  from the nozzle upstream of the Mach disk (distance  $L_{\text{Mach}}$ ) to ensure a high particle velocity.

$$L_{\text{Mach}} = 0.67d \sqrt{\frac{P_0}{P_1}}$$

This allows particles as small as 5 nm to be deposited in the case of silver (Huang, 2007). The final particle velocity can be calculated numerically as a function of  $L$ . It easily reaches 200 m/s and determines the impaction energy. If high enough, it induces sintering in the direction of deposition, which gives the porous layer some stability.

Fig. 1 shows the result of laser profiling of the line cross sections for different distances and 5 nm (geometric mean) gold particles, which quite exactly coincide with Gaussian curves.

Regarding applications of this 3D-printer set-up, the capability of (external) mixtures sets no limit to development of arbitrary co-catalysts, e.g. for microreactors and of chemical sensors. Detection of

single (bio-)molecules is, in principle, possible by SERS, and our versatility with respect to material and morphology has already enabled production of SERS substrates at VSPARTICLE, which are significantly superior to the state of the art. An example of printing

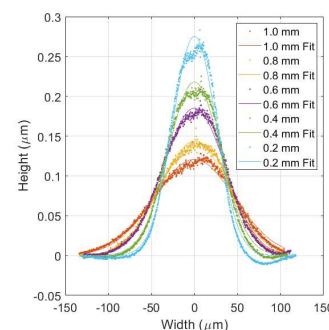


Figure 1: Deposition profiles at different distances

on a contact lens is shown in Fig. 2 (Rennen et al., 2020). The golden color indicates strong impaction sintering/coalescence, since an unsintered Au powder layer would appear black. The heating caused by the collisions is so local that the polymer stays intact.

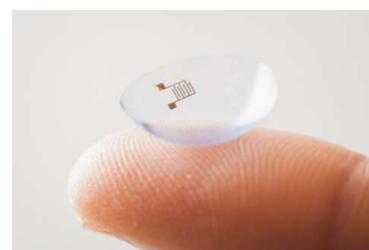


Figure 2. Au Pattern printed onto a contact lens

Boeije, M.F.J., Biskos, G., van der Maesen, B.E., Pfeiffer, T.V., van Vugt, A.W., Zijlstra B., Schmidt-Ott, A., (2020) in *Spark Ablation: Building Blocks for Nanotechnology*, Ed. A. Schmidt-Ott, J. Stanford Publ.

Girshik, S.L., J. Nanoparticle Res. (2008), 935–945

Eva A.J. Rennen, E.A.J., Schmidt-Ott, A. (2020), in *Spark Ablation: Building Blocks for Nanotechnology*, Ed. by A. Schmidt-Ott, J. Stanford Publishing

Huang, C et al, Supersonic jet deposition of silver nanoparticle aerosols: Correlations of impact conditions and film morphologies. J. Appl. Phys., 101:064902, 2007

This work was supported by Boschman BV and NWO (joint research program with Dept. of Sci. and tech. of Guangdong, China).